












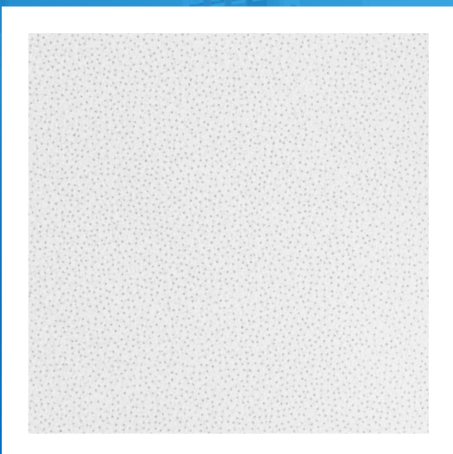



















## AMF ECOMIN Orbit Micro

- ECOMIN Orbit Micro is a value-for-money product with a structured and ground surface
- Good light reflectance (85%)
- Ideal for retail, offices and meeting rooms, installation rooms or production areas



# AMF ECOMIN ORBIT MICRO

<b>Edge details</b> Additional edge details on request		Board 														
<b>Thickness (mm)</b>		13														
<b>Dimensions (mm)</b> Additional sizes on request		600 x 600														
<b>System</b>		Exposed demountable - System C Exposed - Bandraaster, demountable - System I.3 Exposed - Corridor, demountable - System F.3														
<b>Weight</b>		3.1 - 3.3 kg / m <sup>2</sup>														
<b>Colour</b>		White														
<b>Sound absorption</b>		EN ISO 354 $\alpha_w = 0.50$ as per EN ISO 11654 - <b>Class D</b> <table border="1" data-bbox="459 943 1453 1014"> <thead> <tr> <th>Frequency f (Hz)</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td><math>\alpha_p</math> Board</td> <td>0.50</td> <td>0.40</td> <td>0.45</td> <td>0.60</td> <td>0.55</td> <td>0.40</td> </tr> </tbody> </table> NRC = <b>0.50</b> as per ASTM C 423	Frequency f (Hz)	125	250	500	1000	2000	4000	$\alpha_p$ Board	0.50	0.40	0.45	0.60	0.55	0.40
Frequency f (Hz)	125	250	500	1000	2000	4000										
$\alpha_p$ Board	0.50	0.40	0.45	0.60	0.55	0.40										
<b>Fire reaction</b>		Euroclass <b>A2-s1, d0</b> as per EN 13501-1 RUS <b>KM1 (G1, V1, D1, T1)</b> as per FZ 123														
<b>Light reflectance</b>		85%														
<b>Thermal conductivity</b>		$\lambda = 0.060 \text{ W/m K}$ as per EN 12667														
<b>Humidity resistance</b>		70% RH														
<b>Indoor air quality</b>		<table border="1" data-bbox="459 1348 686 1473"> <tr> <td></td> <td></td> </tr> <tr> <td>A+</td> <td>E1</td> </tr> </table>			A+	E1										
																
A+	E1															
<b>Cleanability</b>																
<b>Sustainability</b>		<table border="1" data-bbox="459 1594 686 1704"> <tr> <td></td> <td></td> </tr> <tr> <td>EN ISO 14021</td> <td>BIOSOLUBLE WOOL EC 1272/2008 Annex G</td> </tr> <tr> <td colspan="2">31-40%</td> </tr> </table>			EN ISO 14021	BIOSOLUBLE WOOL EC 1272/2008 Annex G	31-40%									
																
EN ISO 14021	BIOSOLUBLE WOOL EC 1272/2008 Annex G															
31-40%																

Products may vary from country to country.  
 Please contact your local sales representative.  
 For further information and legal notice, please visit our website.