


Knauf Universal Connector

Technical Data Sheet 12/2023

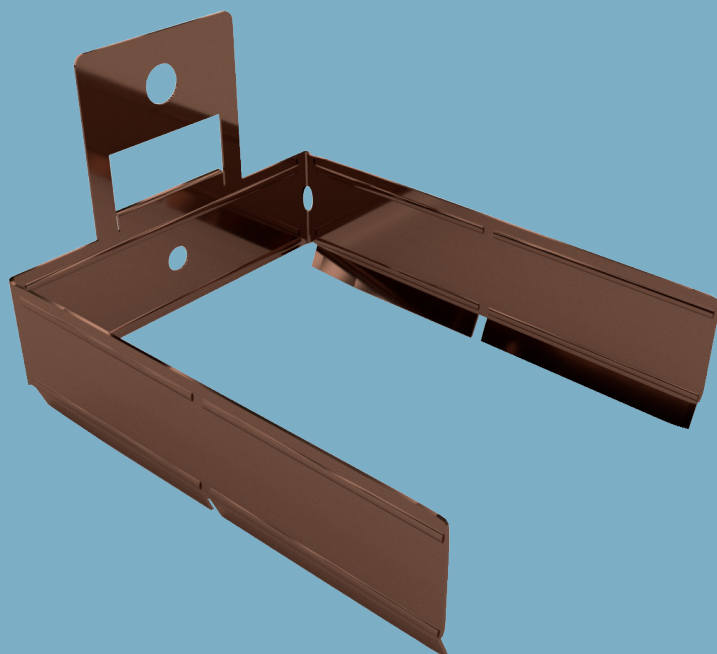

Knauf Universal Connector

Connector element

Product Description

Components used for connecting carrying and furring ceiling C channels at the same level.

Storage

- Direct contact with water should be avoided.
- Packages should be stored in flat, dry and clean areas.

Standards referred to

-

Fields of Application

- Suspended Ceiling Systems

Properties

- Clean and easy installation

Technical Data

Description	Thickness (mm)	Weight (kg/pcs.)	Packaging Unit (pcs./pallet)	Standard	Material Number
Knauf Universal Connector - TC 60 / 27	0,8	0,075	100	-	149246
Knauf Universal Connector - TC 49 / 15 (Optimum)		0,04			147509

System Performance Values

Performance values as sound insulation, fire resistance etc. may differ acc. to the drywall system to be applied. Please check the performance values of the drywall systems;

[Knauf Technical Website](#)
[Document Center](#)

Application

Application should be done acc. to the applicable standards and acc. to the Knauf Technical Brochures of the respective drywall system.

▶ 444 YAPI - 9274

▶ www.knauf.com.tr / www.teknik.knauf.com.tr

▶ teknik@knauf.com

Center: Knauf Moment Beştepe Office, Beştepe Mah. 32.Cadde No:1/212-218 06560 Beştepe-Yenimahalle
/ ANKARA Tel: 0312 297 0100 Faks: 0312 266 4506