

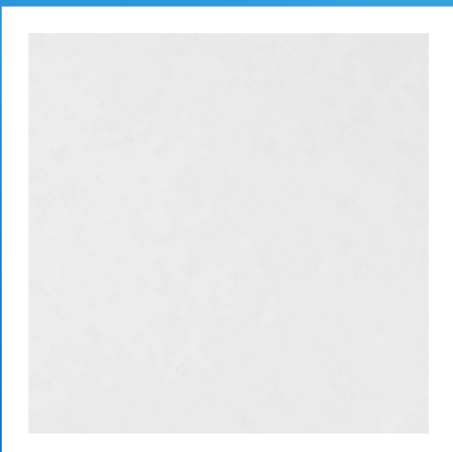





AMF TOPIQ® Prime Hygena

- TOPIQ® Prime Hygena is a very light panel with a modern, smooth surface
- The surface is washable and anti-microbial (resistant to the growth of germs, bacteria and fungi)
- Excellent sound absorption (0.95 α_w)
- Excellent light reflectance (88%)
- ISO 5
- Ideal for offices, retail, classrooms, learning applications and underground garages



Edge details Additional edge details on request		Board 	Tegular 24/90 	Tegular 15/90 														
Thickness (mm)		15	15	15														
Dimensions (mm) Additional sizes on request		600 x 600 625 x 625 1200 x 600	600 x 600 625 x 625 1200 x 600	600 x 600 625 x 625 1200 x 600														
System		Exposed demountable - System C Exposed - Bandraster, demountable - System I.3 Exposed - Corridor, demountable - System F.3																
Weight		2.1 kg / m²																
Colour		White																
Sound absorption		EN ISO 354 $\alpha_w = \mathbf{0.95}$ as per EN ISO 11654 - Class A <table><tr><td>Frequency f (Hz)</td><td>125</td><td>250</td><td>500</td><td>1000</td><td>2000</td><td>4000</td></tr><tr><td>α_p Board, Tegular</td><td>0.50</td><td>0.85</td><td>0.95</td><td>0.90</td><td>1.00</td><td>1.00</td></tr></table> NRC = 0.90 as per ASTM C 423			Frequency f (Hz)	125	250	500	1000	2000	4000	α_p Board, Tegular	0.50	0.85	0.95	0.90	1.00	1.00
Frequency f (Hz)	125	250	500	1000	2000	4000												
α_p Board, Tegular	0.50	0.85	0.95	0.90	1.00	1.00												
Sound attenuation		EN ISO 10848-2 $D_{n,f,w} = \mathbf{24\ dB}$ as per EN ISO 717-1																
Sound reduction		EN ISO 10140-2 $R_w = \mathbf{13\ dB}$ as per EN ISO 717-1																
Fire reaction		Euroclass A1 as per EN 13501-1 RUS KM2 (G1, V1, D1, T1) as per FZ 123																
Light reflectance		88%																
Humidity resistance		100% RH																
Clean room		ISO 5 as per EN ISO 14644-1																
Indoor air quality		 A	 E1															
Cleanability																		
Sustainability	 EN ISO 14021 32-33%	 BIOSOLUBLE WOOL EC 1272/2008 Annex G	 BLAUER ENGEL Umweltzeichen	 M1 EMISSION CLASS FOR BUILDING MATERIALS														

Products may vary from country to country.
Please contact your local sales representative.
For further information and legal notice, please visit our website.