

AMF VENTATEC® Performance T24 - High SG

Exposed 24 mm grid system - System C

Key features

- The combination of stitching and ribbing delivers excellent stability and torsional strength
- The riveted stainless steel Click-connector audibly clicks in place and can be easily removed when required
- High loading capacity due to 38 mm high Main Runners and Cross Tees
- Butt cut Cross Tee system preferred for precise flush connection of the grid face

Application areas


- Healthcare / Classrooms / Meeting rooms / Individual offices

Physical data

- Material: galvanised steel
- Surface finish: baked polyester paint
- Colour: AMF VENTATEC® White; Matt Black (LM) on request

AMF VENTATEC® Performance T24 - High

Universal Main Runners (bulb-to-bulb connection)





Item reference	Dimensions (mm)			Slot centres	Content/carton		Weight/ carton kg	Cartons/ pallet
	Length	Width	Height		pcs	lm		
VEN24TH375W	3750	24	38	156.25	20	75.00	24.00	36
VEN24TH360W	3600	24	38	150	20	72.00	23.00	36

Special Colours on request


AMF VENTATEC® Performance T24 - High

Cross Tees (click - butt cut SG)



Item reference	Dimensions (mm)			Slot centres	Content/carton		Weight/ carton kg	Cartons/ pallet
	Length	Width	Height		pcs	lm		
Cross Tees - Slotted								
VEN24TH125SGW	1250	24	38	312.5	60	75.00	23.00	60
VEN24TH120SGW	1200	24	38	300	60	72.00	22.00	60
VEN24TM62,5SGW	625	24	33	312.5	60	37.50	10.80	100
VEN24TM60SGW	600	24	33	300	60	36.00	10.20	100


Special Colours on request

Section Drawings**AMF VENTATEC® Performance T24 - High****Universal Main Runners** (bulb-to-bulb connection)


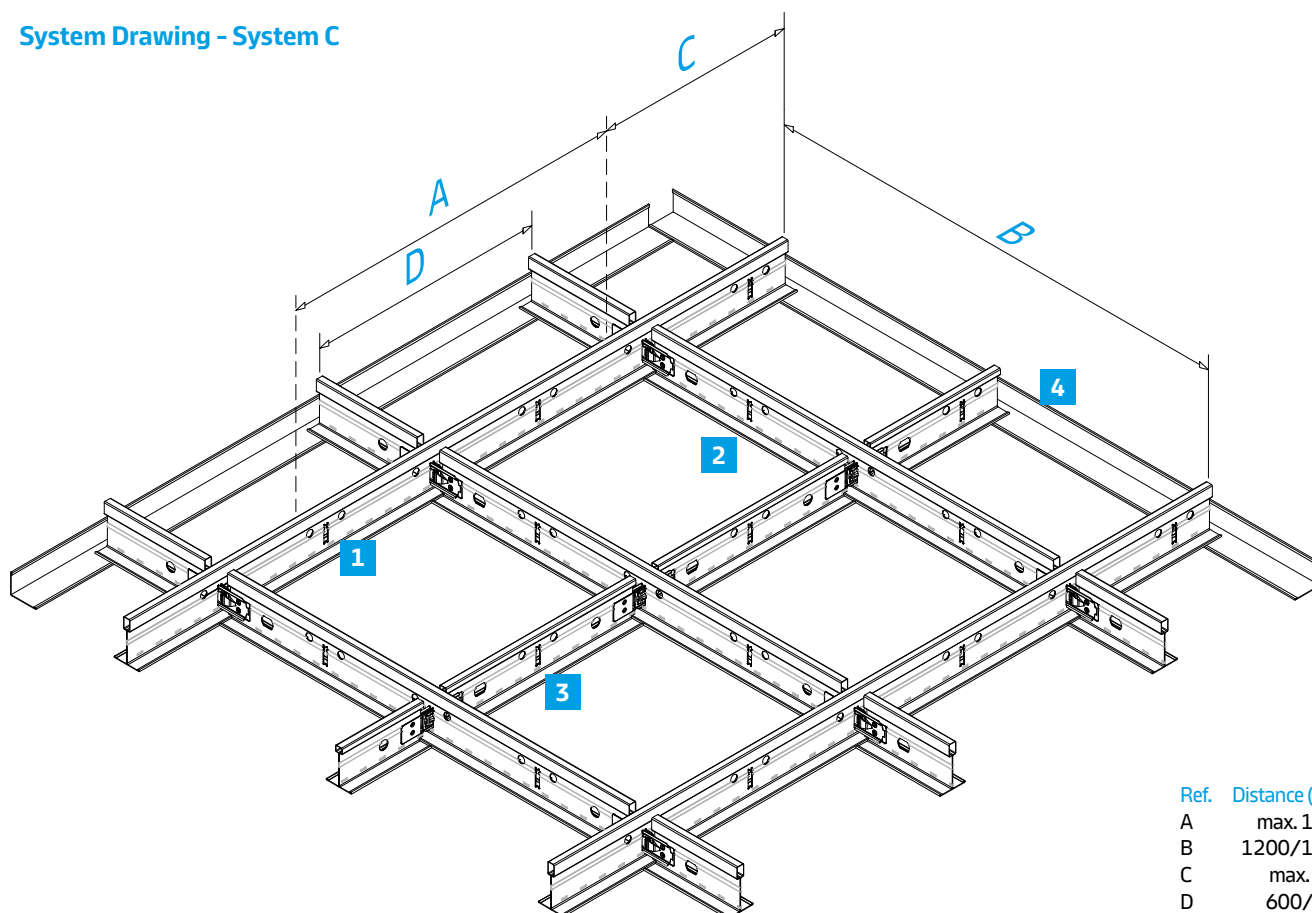
Length	3750	78.125	156.25	21 x 156.25	156.25	78.125
	3600	75	150	21 x 150	150	75

AMF VENTATEC® Performance T24 - High**Cross Tees** (click - butt cut SG)


Length	1250	312.5	2 x 312.5	312.5
	1200	300	2 x 300	300



Length	625	312.5	312.5
	600	300	300

System Drawing - System C


Ref.	Distance (mm)
A	max. 1500
B	1200/1250
C	max. 400
D	600/625

Material required per m² (no waste included)

No.	Description	Item reference	Module 600 x 600	Module 625 x 625	Module 1200 x 600	Module 1250 x 625
1	Main Runner	VEN24TH360W VEN24TH375W	0.84 lm –	– 0.80 lm	0.84 lm –	– 0.80 lm
2	Long Cross Tee	VEN24TH120SGW VEN24TH125SGW	1.67 lm –	– 1.60 lm	1.67 lm –	– 1.60 lm
3	Short Cross Tee	VEN24TM60SGW VEN24TM62,5SGW	0.84 lm	0.84 lm	0.84 lm	
4	Perimeter trim	–	Dependent on room dimensions (approx. 0.6 lm/m ²)			
	Hanger	–	0.70 pcs	0.64 pcs	0.70 pcs	0.64 pcs
	Retaining Clip	–	5.56 pcs	5.56 pcs	5.56 pcs	5.56 pcs
	Tiles	–	2.78 pcs	2.56 pcs	1.39 pcs	1.28 pcs

Load Table

Maximum permissible weight (kg/m²)

Main Runner distances	1200 mm	1250 mm	600 mm	625 mm
Hanger distance A (mm)	Module 600x600, 1200x600	Module 625x625, 1250x625	Module 600x600, 1200x600	Module 625x625, 1250x625
800	14.0	12.0	25.0	25.0
1000	11.8	10.2	25.0	24.2
1200	9.5	8.4	17.5	16.6
1500	5.8	5.2	9.6	9.2
Note: The load per m ² must be evenly distributed (no extra point loads). After loading, the deflection will remain within the permitted deflection according to class 1 (L/500) of EN 13964, provided the grid is laid out as shown.				

For other grid layouts, load capacities or hanger distances, please contact Knauf Ceiling Solutions.

Characteristics	Detailed information		
Fire reaction		Euroclass A1 as per EN 13501-1	
Indoor air quality		 A+  ISO 3	
Cleanability			
Sustainability	 25%  EPD  Full scope		

All measurements in millimetres. All sizes are nominal.
Cross Tee alignment is achieved by locating the tees to the left-hand side of the adjoining section.

Products may vary from country to country. Please contact your local sales representative.
For further information and legal notice, please visit our website.