

Wall Systems
FABRIC Wallcoustic Line
(LINE Style)
Individual



- FABRIC Wallcoustic Line is a fabric covered wall absorber with an elegant aluminium frame and can be easily customised using individual patterns or images. The aluminium frame is supplied with an all-round groove into which the printed fabric is inserted. The fabric covering can be easily removed and replaced with a new fabric design, without using any special tools
- FABRIC Wallcoustic Line 20: Lightweight profile for one-sided coverings in small sizes
- FABRIC Wallcoustic Line 27: Profile for all sizes with one-sided coverings
- FABRIC Wallcoustic Line 50: Profile for all sizes with one-sided coverings and a highly absorbing acoustic filling




FABRIC Wallcoustic Line


Individual

Thickness (mm) 	20	27	50														
Dimensions (mm) 	600 x 600 1 200 x 600	1200 x 1200 1800 x 1200 2400 x 1200 2400 x 2400	600 x 600 1200 x 600 1200 x 1200 1800 x 1200 2400 x 1200 2400 x 2400														
System 	Wall bracket																
Weight 	3.0 - 6.0 kg/m ²																
Colour & design 	Frame: anodised aluminium, white, RAL colours FABRIC Wallcoustic Line 20: fabric, white or Custom Graphic Print FABRIC Wallcoustic Line 27: fabric, white or Custom Graphic Print FABRIC Wallcoustic Line 50: fabric, white or Custom Graphic Print																
Sound absorption 	EN ISO 354 Frequency f (Hz) Equivalent Absorption Area Aobj* <table border="1" data-bbox="432 808 1422 898"> <thead> <tr> <th></th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>1200 x 1200mm (50mm thickness)</td> <td>0.30</td> <td>0.90</td> <td>1.90</td> <td>1.90</td> <td>1.80</td> <td>1.60</td> </tr> </tbody> </table> <p style="text-align: right; font-size: small;">*Values shown are the average of the 3 one third octave band values</p>				125	250	500	1000	2000	4000	1200 x 1200mm (50mm thickness)	0.30	0.90	1.90	1.90	1.80	1.60
	125	250	500	1000	2000	4000											
1200 x 1200mm (50mm thickness)	0.30	0.90	1.90	1.90	1.80	1.60											
Humidity resistance 	90%																
Cleanability	 																


FABRIC Wallcoustic Line

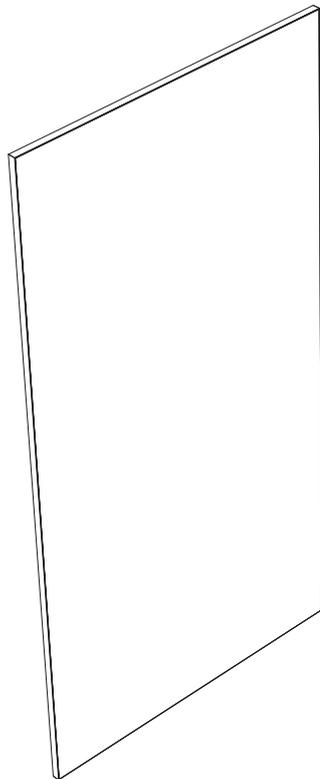

Profile cross-sections

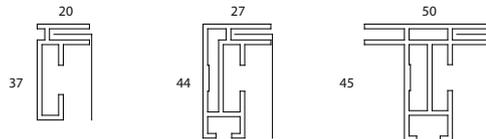

Corner connection



Detail frame

