


## CORRIDOR 400 GLOBE - PERFORERINGSDATA


### PERFORERINGSDETALJER

Perforeringstype	Globe - 6 mm runde huller
Perforeringsprocent	10,6 %
Perforeringsmønster	G1

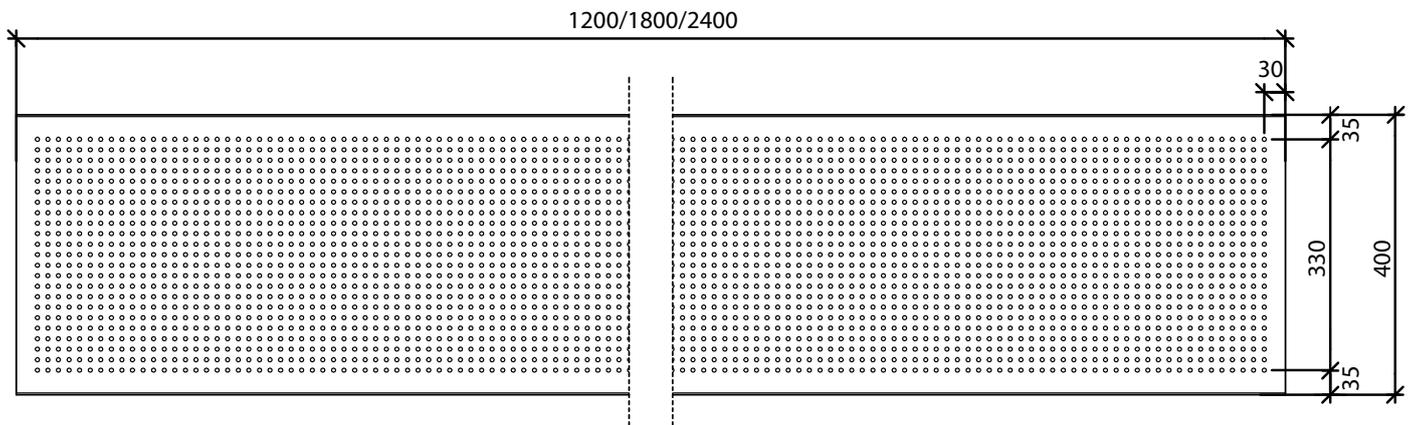

### ABSORPTIONSKOEFFICIENTER

Frekvens (Hz)	125	250	500	1000	2000	4000
$\alpha_p$	0,55	0,80	0,80	0,65	0,60	0,55

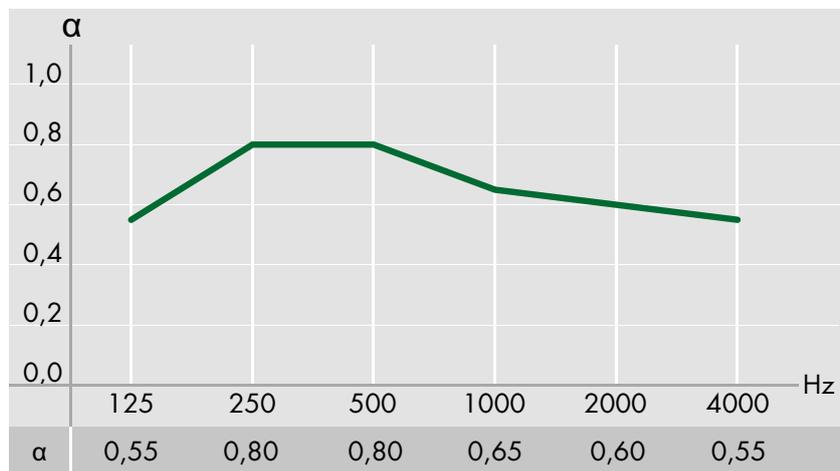


Ved 200 mm og med 50 mm mineraluld

## CORRIDOR 400 MICRO - PERFORERINGSDATA


### PERFORERINGSDETALJER

Perforeringstype	Micro - 3x3 mm kvadratiske huller
Perforeringsprocent	10,6 %
Perforeringsmønster	M1

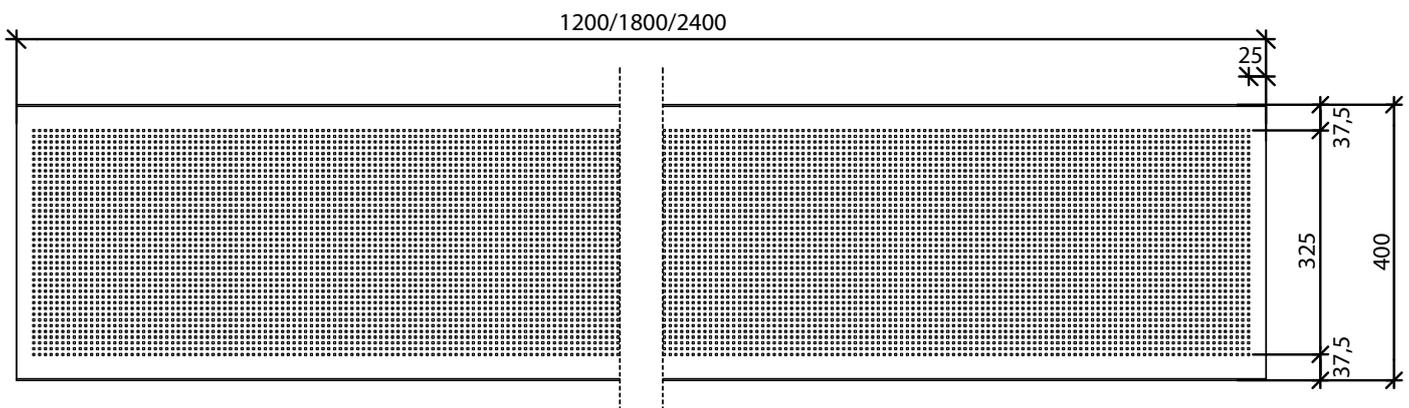

### ABSORPTIONSKOEFFICIENTER

Frekvens (Hz)	125	250	500	1000	2000	4000
$\alpha_p$	0,45	0,70	0,75	0,75	0,75	0,75

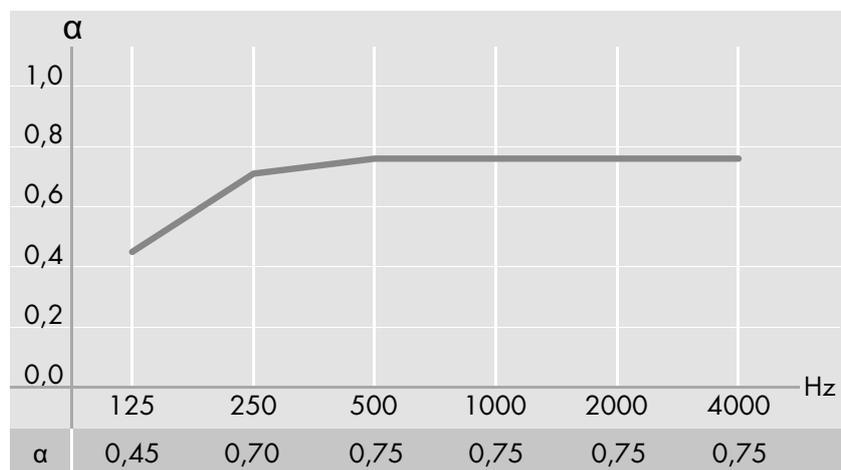


Ved 200 mm og med 50 mm mineraluld

## CORRIDOR 400 QUADRIL - PERFORERINGSDATA


### PERFORERINGSDETALJER

Perforeringstype	Quadril - 12x12 mm kvadratiske huller
Perforeringsprocent	14,2 %
Perforeringsmønster	Q1

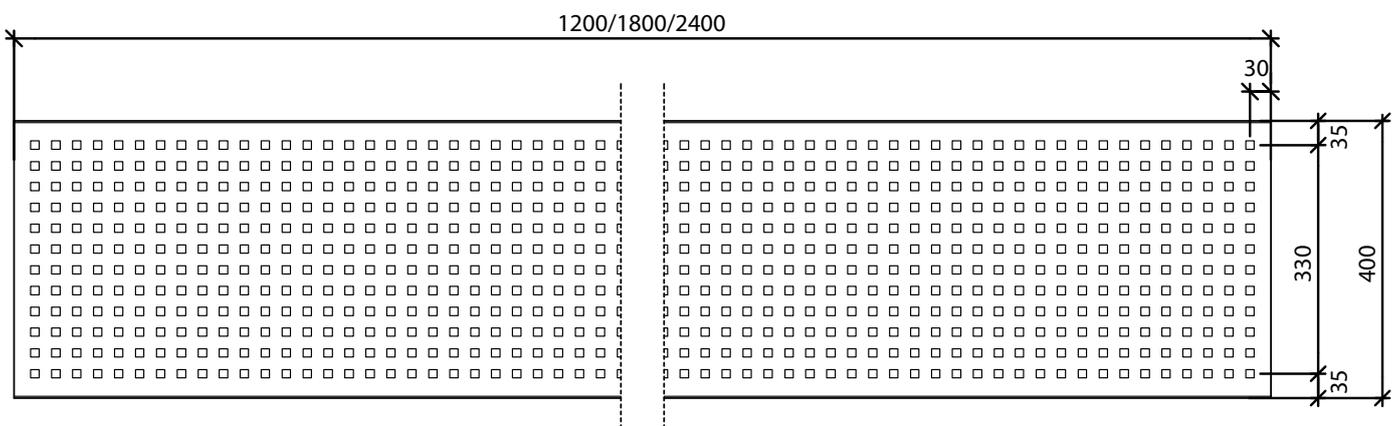

### ABSORPTIONSKOEFFICIENTER

Frekvens (Hz)	125	250	500	1000	2000	4000
$\alpha_p$	0,55	0,80	0,85	0,75	0,70	0,60

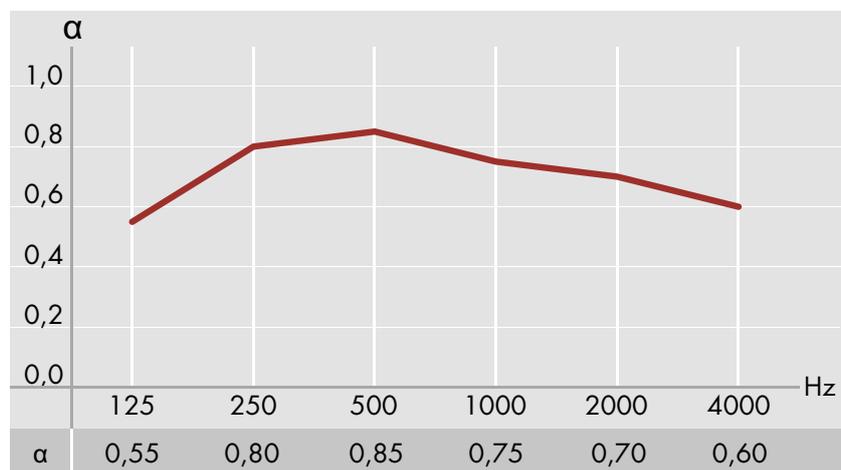


Ved 200 mm og med 50 mm mineraluld

## CORRIDOR 400 TANGENT - PERFORERINGSDATA


### PERFORERINGSDETAJLER

Perforeringstype	Tangent - 4x14 mm ovale huller
Perforeringsprocent	21,6 %
Perforeringsmønster	T1

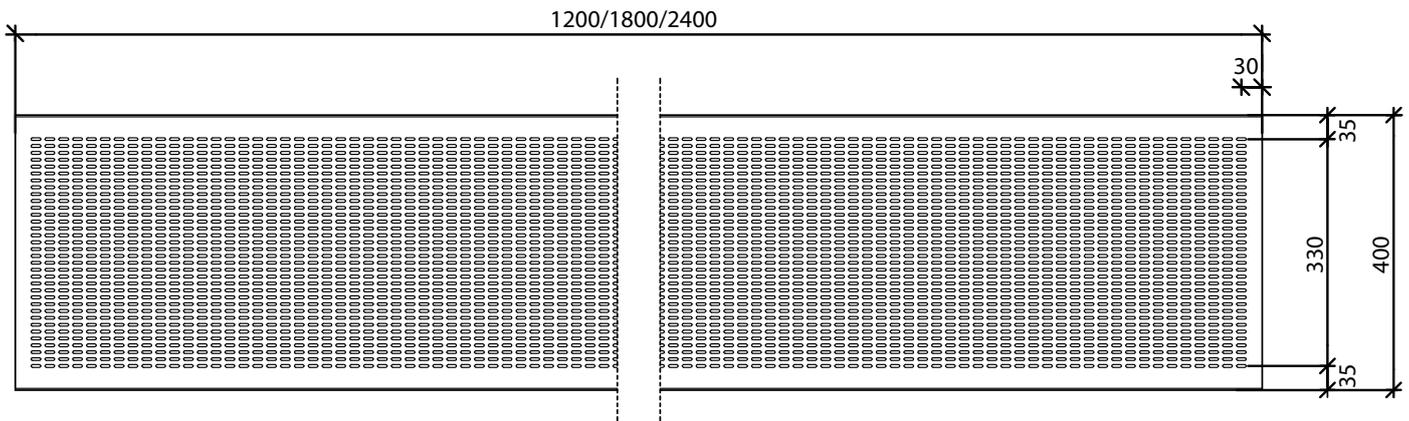

### ABSORPTIONSKOEFFICIENTER

Frekvens (Hz)	125	250	500	1000	2000	4000
$\alpha_p$	0,75	0,95	0,95	0,90	0,90	0,95

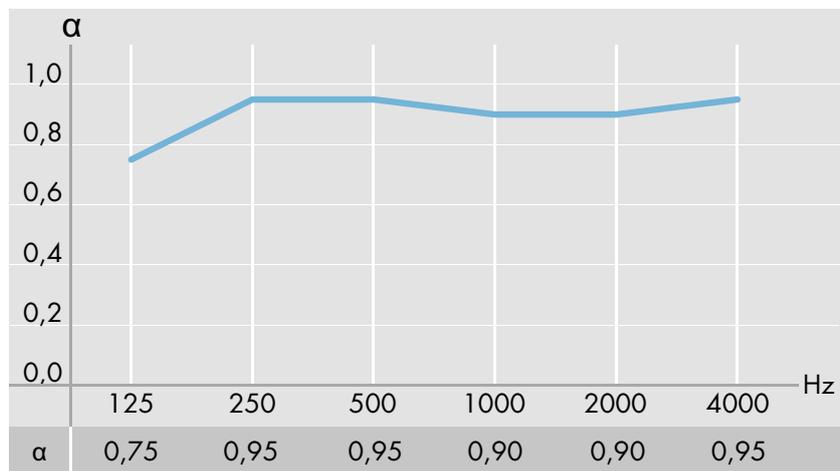

Ved 200 mm og med 50 mm mineraluld