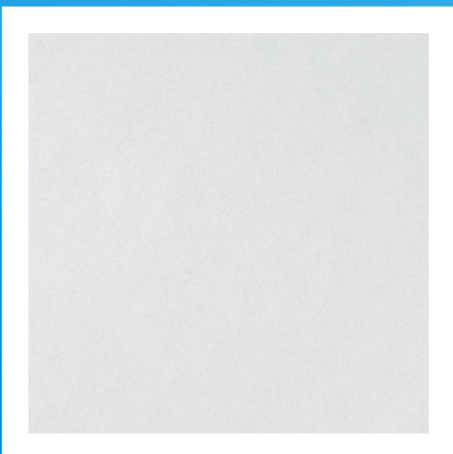































## AMF TOPIQ® Prime

- AMF TOPIQ® Prime is a very light stone wool panel with a modern, smooth surface.
- Excellent sound absorption ( $0.95 \alpha_w$ )
- Excellent light reflectance (88%)
- ISO 5
- Ideal for offices, retail, classrooms, learning applications and underground garages



<b>Edge details</b> Additional edge details on request	 Board 	Tegular 24/90 	Tegular 15/90 														
<b>Thickness (mm)</b>	 15	15	15														
<b>Dimensions (mm)</b> Additional sizes on request	 600 x 600 625 x 625 1200 x 600 1250 x 625	600 x 600 625 x 625 1200 x 600	600 x 600 625 x 625 1200 x 600														
<b>System</b>	 Exposed demountable - System C																
<b>Weight</b>	 2.1 kg / m <sup>2</sup>																
<b>Colour</b>	 White																
<b>Sound absorption</b>	 EN ISO 354 $\alpha_w = 0.95$ as per EN ISO 11654 - <b>Class A</b> <table border="1" data-bbox="459 878 1455 958"> <thead> <tr> <th>Frequency f (Hz)</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td><math>\alpha_p</math></td> <td>0.50</td> <td>0.85</td> <td>0.95</td> <td>0.90</td> <td>1.00</td> <td>1.00</td> </tr> </tbody> </table> NRC = <b>0.90</b> as per ASTM C 423			Frequency f (Hz)	125	250	500	1000	2000	4000	$\alpha_p$	0.50	0.85	0.95	0.90	1.00	1.00
Frequency f (Hz)	125	250	500	1000	2000	4000											
$\alpha_p$	0.50	0.85	0.95	0.90	1.00	1.00											
<b>Sound attenuation</b>	 EN ISO 10848-2 $D_{n,f,w} = 24$ dB as per EN ISO 717-1 CAC = <b>24 dB</b> as per ASTM E 413-10																
<b>Sound reduction</b>	 EN ISO 10140-2 $R_w = 13$ dB as per EN ISO 717-1																
<b>Fire reaction</b>	 Euroclass <b>A1</b> as per EN 13501-1 <b>Class A</b> as per ASTM E 84 RUS <b>KM2 (G1, V1, D1, T1)</b> as per 123-FZ																
<b>Light reflectance</b>	 <b>88%</b>																
<b>Humidity resistance</b>	 <b>100% RH</b>																
<b>Clean room</b>	 <b>ISO 5</b> as per EN ISO 14644-1																
<b>Indoor air quality</b>	  A  E1  IAC INDOOR AIR COMFORT CERTIFIED PRODUCT																
<b>Cleanability</b>	  																
<b>Sustainability</b>	 EN ISO 14021 32-33%  BIOSOLUBLE WOOL EC 1272/2008 Annex G  M1  BLUE ANGEL <a href="http://www.blauer-engel.de/uz132">www.blauer-engel.de/uz132</a>																

Products may vary from country to country. Please contact your local sales representative. For further information and legal notice, please visit our website.