











WHICH COMPOUND SHOULD YOU USE FOR THE JOINTING OF GYPSUM BOARD?

Knauf Premium Jointing and Premix are your tried and tested partners in durable, smooth, and professional jointing applications.

Jointing Materials	Description	Features/Benefits	Size	Drying/Setting Time	Shelf Life
 <p>Premium Jointing</p>	Premium jointing is a plaster-based all-purpose powder compound used on the jointing of boards.		20kgs	20-45 mins	9 mos
 <p>Premium Premix</p>	Premium Premix is a air-drying and lightweight putty. Use this for a smooth and perfect finish on board joints; can be used as 3rd or finishing coat.		28kgs 5.4kgs	12-24 hrs	9 mos
 <p>Paper Tape</p>	Knauf Paper Tape is used to further strengthen the joints on boards to help avoid hairline cracks.		50mm (width) x 75m (length) per roll	-	-


Other Knauf Compounds	Description	Features/Benefits	Size	Setting Time	Shelf Life
 <p>Premium Cornice</p>	Premium Cornice is a high-strength bonding compound used in installing cornices on walls and ceilings.		20kgs	30 mins	9 mos
 <p>Premium Casting</p>	Premium Casting is used in moulding cornices, corbels and other decorative moulding applications.		20kgs	10 mins	9 mos

-  Easy to Mix
-  Fast/Consistent Drying Time
-  Easy to Sand, Smooth Finish
-  Minimal Shrinkage
-  Crack-Resistant
-  Jointing Tape
-  High Adhesion

Note: The 9-month shelf life indicated for the products on this page applies if the products are stored strictly following Knauf's recommended storage guidelines.

HOW TO APPLY JOINTING COMPOUNDS

Tools and materials needed: Knauf jointing compound, paper tape, spatula, mixing board, and clean water.


 Follow the recommended frame requirements and level the frame before installation.



1
Mix two (2) parts Knauf Premium Jointing and one (1) part clean water. A ready-mix Premium Premix can also be used as a substitute.



2
Using the spatula, apply the compound in between gypsum boards to serve as the paper tape glue.




3
Center and press the paper tape into the base compound using the spatula, drawing along the joint with sufficient pressure to remove excess compound. Wait to dry.



4
Apply succeeding layers or coats depending on the desired level of finish. Allow the the previous coats to set prior application of next coat.



5
Remember to cover the screw heads with jointing compound accordingly. Wait for it to dry.

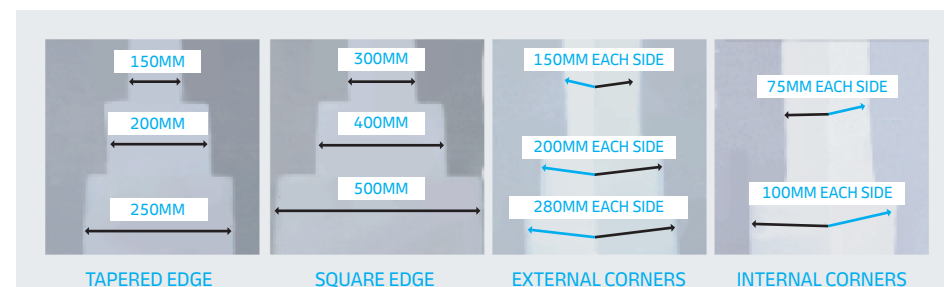

This is the recommended width of coat application for tapered edges, square edges, external corners, and internal corners.

KNAUF

KNAUF

USE KNAUF JOINTING COMPOUNDS!

Avoid Hairline Cracks

Knauf Premium Jointing and Premix are your tried and tested partners in durable, smooth, and professional jointing applications.

Fast and Efficient Work

- ✓ Easy to apply
- ✓ Quick to dry*
- ✓ Easy to sand
- ✓ Multipurpose, can be used to patch holes and uneven surfaces

*Applicable only to Premium Jointing. The drying time of Premium Premix is dependent on the climate and condition on project site.

Tried and Tested, Well-Known Product



Boral is now Knauf



Scan the QR code to know more.

Tel.: (+63) 2 8911 6709
Phone: 0917 853 3593

Knauf Gypsum Philippines, Inc.,
Pasig City Office: 14F – Office 2, One Paseo Bldg, Paseo de Arco Cor. E. Rodriguez Ave.(C5) ArcoVia City, Pasig City,1604 Philippines
Plant: Km. 117 National Highway Calaca Industrial Seaport Corp., Brgy. Lumbang Calzada, Calaca, Batangas, 4212 Philippines
Knauf Academy: Lot 35 Block 11, E. Rodriguez Jr. Avenue, Bagumbayan, Quezon City, 1008 Philippines
Hotline Number: 0917 853 3593, Email: info.ph@knauf.com, Website: www.knaufapac.com/en_ph

Build on us.

Build on us.

KNAUF JOINTING COMPOUNDS

Avoid Cracks on
Walls and Ceilings

