

KNAUF

PRODUCT BROCHURE

Interiors



Build on us.



CONTENTS

GENERAL INFORMATION	5	PASSIVE FIRE PROTECTION	48	AQUAPANEL®	90
Post Brexit Product Conformity	6	Fire Encasement	50	AQUAPANEL® Cement Boards	92
Knauf CE Marking	6	Passive Fire Protection Range	52	AQUAPANEL® Fixings	93
Customer Services	7	JOINTING	54	AQUAPANEL® Accessories	94
Technical Services	8	Powdered Jointing Compounds	56	Coated Metal	96
CITB Accredited Training	9	Ready-mixed Jointing Compounds	58	FLOORING PANELS	100
Bespoke Plasterboard Sizing Service	10	Specialist Jointing	60	Dry Screed Floor Panels	102
STANDARD AND HIGH PERFORMANCE PLASTERBOARDS	12	Jointing Tapes	60	Acoustic Panels	104
Standard Plasterboards	14	Jointing Corner Beads	61	FLOORING ACCESSORIES	106
High Performance Plasterboards	16	Jointing Edge Beads	62	Dry Screed Floor Accessories	108
Insulating Laminates	23	FINISHING SOLUTIONS	64	GIFAFLOOR ACCESS SYSTEMS	110
Plasterboard Accessories	24	Ready-mixed Airless Finish	66	Access Frame Systems	112
METAL SECTIONS	26	Roller Applied Plaster	68	Access Frame Components	113
Partition Studs	28	Ready-mixed Primer	69	APPENDIX	114
'U' Channels	31	ACOUSTIC AND DESIGN	70	Index	116
Shaftwall System	32	Choose the right range for your ceiling	72	The 100% Knauf System Performance Warranty	120
'C' Form Ceiling and Wall Lining System	34	Demountable Ceilings – T-grid	73	Knauf Product Warranty	121
MF Ceiling System	36	Demountable Self-Supporting Ceilings	79		
CD Ceiling and Wall Liner	38	Non-Demountable Ceilings	81		
Metal Section Accessories	40	Sound Absorbing Wall Panel	85		
FIXINGS AND ACCESSORIES	42	Non-Demountable Ceilings – Accessories	86		
Fixings	44	Suspension Systems Summary	87		
		Painting Service	88		

There's an increasing demand to build faster, more efficiently and cost effectively. There's a global call for more imaginative and sustainable designs. There is a revolution in materials and construction techniques, opening up a new world of possibilities.

Architects are at the forefront of these changes. Driven by their vision and experience, the built environment is changing for the better, with more ambitious ideas, inspirational designs and beautiful spaces where people want to live and work.

For over 80 years, Knauf has been partnering with architects to shape this new landscape. Continually pioneering new products, services and solutions in facade and drywall construction, we push the boundaries of what is possible, opening the door to bolder design and better buildings. This is our expertise. Combined with the experience and talent of architects, we're changing the way the world builds – more creatively, more efficiently, more responsibly.

Build on us.



1 GENERAL INFORMATION

Our commitment to quality products and great service extends to every contact we have with our customers.

That is why we've developed our Product Brochure to be more than numbers on a page.

It contains product and service information along with useful contact details.

Post Brexit Product Conformity

The introduction of UKCA [UK Conformity Assessed] marking is a new UK product marking that will be used for goods being placed on the market of Great Britain. The UKCA marking alone cannot be used for goods placed on the Northern Ireland market, which requires CE marking or UK[NI] marking.

Goods which are affixed with 'CE' marking and meeting obligations of the EU's Construction Product Regulation may still be placed on the UK market.

Knauf will continue to monitor Government guidelines in respect of product conformity, and introduce legislative changes as they become entrenched in UK law. Any, and all changes will be clearly communicated to all customers of Knauf UK & Ireland.

Knauf CE Marking

From 1 July 2013 the Construction Products Regulation (CPR) came fully into force making it mandatory for products that fall within the scope of a harmonised European standard (hEN) to display CE marking. The CE mark indicates that a particular construction product can be legally placed in European Economic Area (EEA) member states and is based on the principal that the product specification, and therefore the product, is 'fit for purpose'.

All Knauf products affected by the CPR are now fully compliant and CE marked. The example below shows where you can find EN compliance information within this Price List for all products that fall under their scope.

Supporting you with CE marking queries

More information about the changes in regulation and the implications for the Knauf product range can be found on our website at www.knauf.com


Also available on the Knauf website are:

- [DoP documents for downloading](#)
- [Contact details for any queries](#)
- [SDS documents for downloading](#)

You can find more details about product compliance underneath the pricing tables within this Price List.

Stock Availability

- ✓ Indicates that products are available ex-stock
- ✗ Indicates that products may not be available for immediate delivery ex-stock



Customer Services

We understand that partnerships not transactions drive sustainable business growth.

Commercial excellence is an essential component of our brand experience with every department playing a vital role.

To succeed in a competitive market, we're committed to delight our customers at every single touch point, from specifying right through to installation.

We endeavor to;

- Be responsive
- Provide industry leading first time resolution to your enquiries
- On the occasions when things go wrong, we will acknowledge, understand, resolve, and mutually agree an outcome

29,000+

Inbound customer calls fielded with an average response time of **13 seconds**

66,000+

Inbound email enquiries processed in an average of **2hrs 15mins** of receipt

Data from 2023

Our Range of Services

📞 **UK 0800 521 050**
📞 **ROI 01 4620739**

Order Coordination Services


- 📞 (Option 1)
- ✉ Email cservice@knauf.com
- ✉ Electronic Data Interchange (EDI) If you wish to trade with us via EDI please contact customer services cservice@knauf.com

Aftersales Services

- 📞 (Option 3)
- Sales, Customer Service and Supply Chain
- ✉ Email: csadmin@knauf.com
- Product Quality
- ✉ Email: stuart.elliott@knauf.com

Quotation Services

- Please contact your local sales representative or
- ✉ Email internalsales@knauf.com

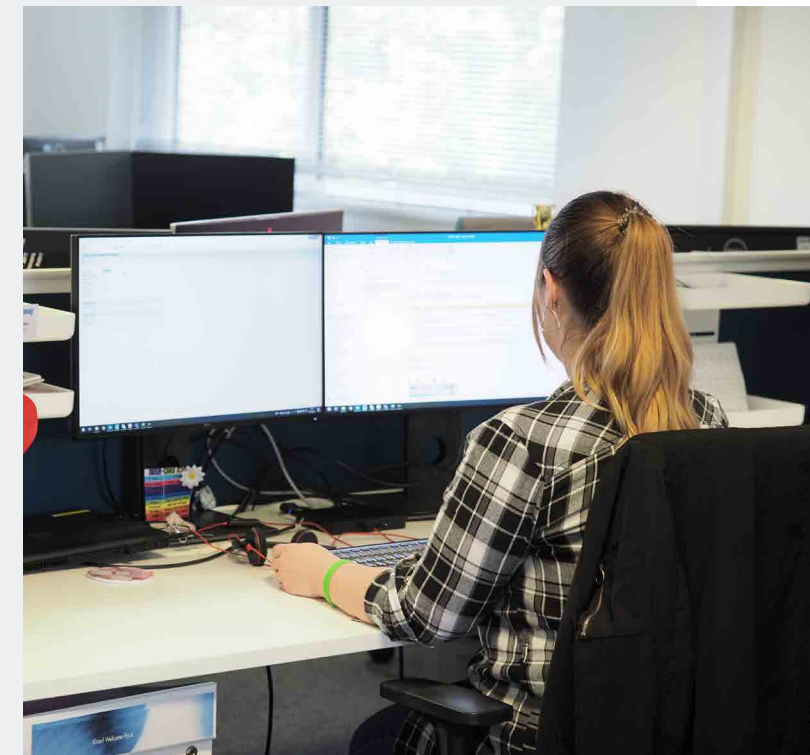

Technical Services

We care about what you do and the outcomes of your building projects. Knauf provide extensive pre-construction, specification and on-site support, assisting at every stage of a project with our market-leading technical and sales support personnel

Our technical services team is always here to help with advice on the best systems for achieving your specified performance criteria.

Our Range of Support

Contact

UK: 0800 521 050 (Option 2)
ROI: 01 4620739 (Option 2)

Email: technical-uk@knauf.com

Monday – Friday (09:00 – 17:00)
(excluding Public Holidays)


Specification Support

Find your local Project Specification Manager
at www.knauf.com/en-GB/knauf-gypsum/contact



On-site Support

Find your local Project Technical Manager
at www.knauf.com/en-GB/knauf-gypsum/contact

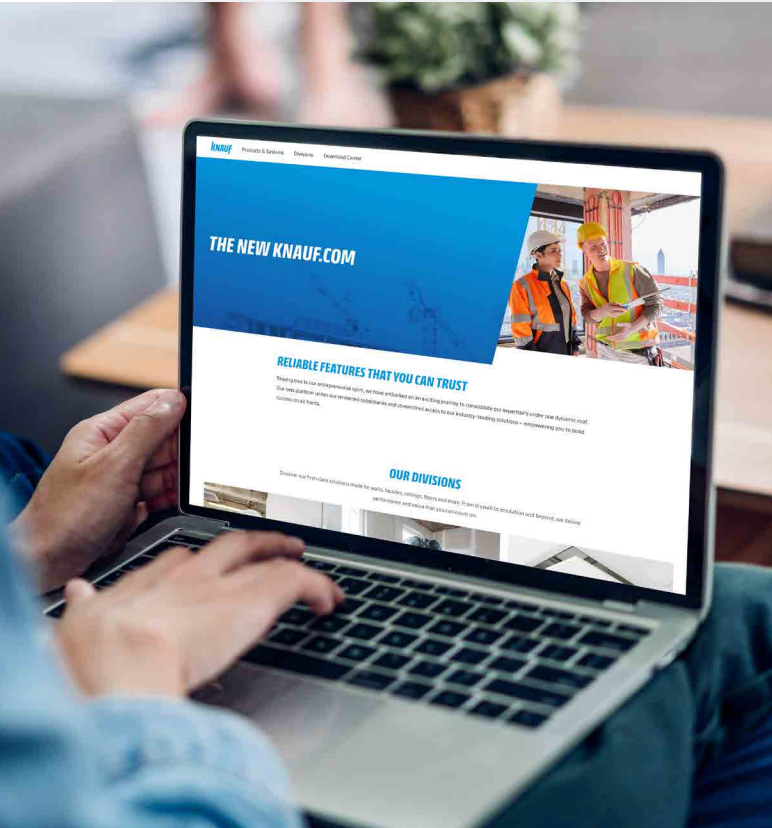

CITB Accredited Training Organisation



The Learning Zones at Immingham and Sittingbourne are CITB approved training facilities and offer various courses for the construction industry. We believe in future-proofing and protecting the workforce.

We provide the best possible training on the large variety of systems and products that we supply, and make our courses widely available to those who request them. Whether the trainees are already skilled tradespeople, wishing to add to their existing knowledge, or people with no previous experience, there is a course in our range to benefit all.

We are happy to advise on the suitability of different courses and the content can be adapted to suit the requirements of the delegates.

All work carried out on the Knauf courses will be in a simulated site environment, and to industry standards, using British Standard and European Codes of Practice for accuracy and finish.

Contact us to find out more about the latest courses available.

Courses available

Drylining – Direct bonding and metal lining systems

Fire protection – Encasement systems

General overview of interior products and systems

Metal stud partitions, shaftwall, wall linings

Metal suspended ceiling systems

Flooring – Brio and GIFA systems

Façades – Steel framing systems

Taping and jointing


AQUAPANEL® Indoor and Outdoor

Demountable ceiling systems

Drywall for site managers / Quality Control

Airless spray finishing

Telephone: 01795 424499
Email: knauftraining@knauf.com
Website: www.knauf.com

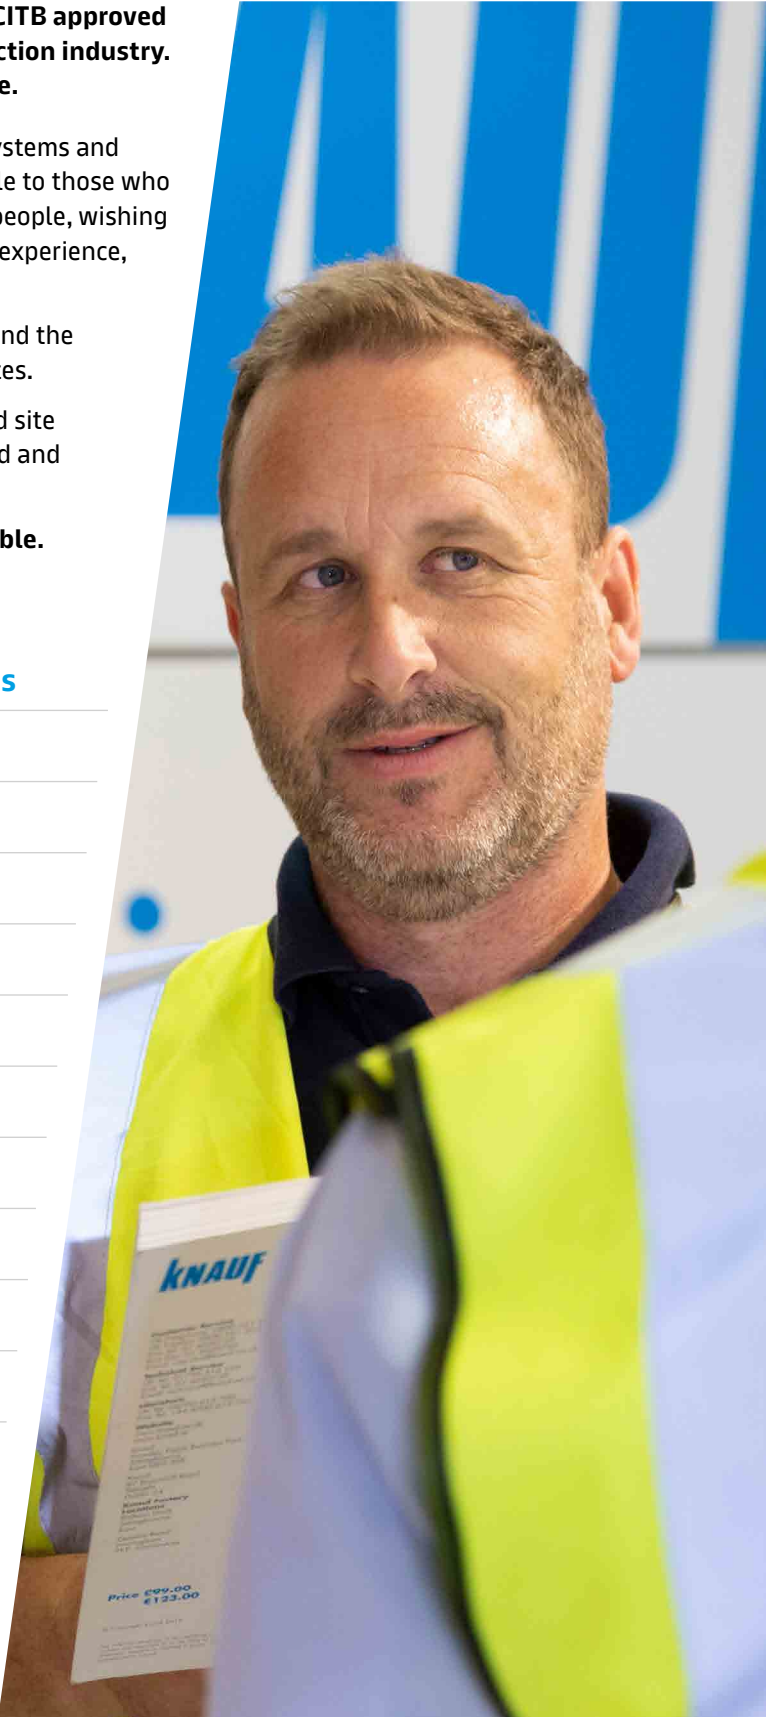

Bespoke Plasterboard Sizing Service

Helping you meet your waste and emission goals with bespoke board sizing

We can help you save waste on site and increase productivity by providing custom plasterboard sizes, for orders over 5000m².

Saving emissions from production, transportation and waste, our bespoke board sizes work for your project and can help you to order less, pay less waste costs, and meet your sustainability targets.

Speak to your Knauf sales contact to find out more:

Contact Us

Find your local Area Sales Manager at <https://knauf.com/en-GB/knauf-gypsum/contact>



- All orders must be taken in full within 45 days of first load delivery.
- Any un-ordered volume from the minimum order amount will be invoiced.
- If the order or part of it is cancelled, the product will be charged in full.
- Minimum order is 5000m².
- Pricing will vary from standard sizing.
- Available in widths of 900mm or 1200mm.
- Available in lengths between 1800mm and 3000mm.
- Lead-time will be confirmed once the order has been placed, but this will be longer than normal board lengths.





2 STANDARD AND HIGH PERFORMANCE PLASTERBOARDS

Our comprehensive plasterboard range includes products specifically designed for increased resistance to fire, moisture, sound, impact and even X-rays – there's a solution for every environment.

Standard Plasterboards

Knauf offers standard plasterboards in a wide range of sizes to meet all basic drylining requirements. Use in conjunction with Knauf jointing compounds, finishes, fixings, plasterboard adhesive and metal systems.

Knauf Wallboard

Knauf Wallboard is plasterboard with an ivory paper face ideally suited to receive a plaster or ready-mixed finish, or for direct decoration.

SQUARE EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
9.5	900	1800	243699	✓	100	162.0	1.00
	1200	2400	243690	✓	92	265.0	1.63
12.5	900	1800	243667	✓	80	129.6	1.06
	1200	2400	243643	✓	72	207.4	1.69
15.0	1200	3000	168040	✗	60	216.0	1.77
		2400	168044	✓	60	172.8	1.76

Compliance: BS EN 520, Type A. Material Pricing Group: I3

TAPERED EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
9.5	1200	2400	243692	✓	92	265.0	1.63
12.5	900	1800	243668	✓	80	129.6	1.06
		2400	243647	✓	72	207.4	1.69
		2500	243651	✓	72	216.0	1.76
		2700	243657	✓	60	194.4	1.59
15.0	900	3000	63461	✓	60	216.0	1.77
		2400	613382	✓	48	103.7	1.06
		2400	168043	✓	60	172.8	1.76
		2700	243677	✓	48	155.5	1.59
		3000	58260	✓	48	172.8	1.76

Compliance: BS EN 520, Type A. Material Pricing Group: I3

Knauf Baseboard

Knauf Baseboard is a handy-sized plasterboard suitable for use as a base for plastering. The board is ideal for patching and repair jobs..

SQUARE EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
9.5	900	1220	243477	✓	96	105.4	0.65

Compliance: BS EN 520, Type P. Material Pricing Group: I4

Knauf Plank

Knauf Plank is a 19mm thick plasterboard for use as a key component in many partition and floor systems, where it acts as an acoustic mass layer.

SQUARE EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
19.0	600	2400	243627	✓	80	115.2	1.63

Compliance: BS EN 520, Type A. Material Pricing Group: I5

TAPERED EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
19.0	600	2400	81063	✓	80	115.2	1.63

Compliance: BS EN 520, Type A. Material Pricing Group: I5



For the perfect finish and performance, use with Knauf Metal, Fixings, Jointing and Finishing products

High Performance Plasterboards

Knauf High Performance Plasterboards offer the convenience of Knauf Wallboard, but with significantly higher performance in key areas. The Knauf High Performance Plasterboard range includes solutions for installations requiring enhanced fire, moisture, vapour, sound, impact and X-ray resistance.

Knauf Vapour Panel

Knauf Vapour Panel has a metallised polyester foil laminated on the grey paper face, creating an effective vapour barrier.

SQUARE EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
12.5	900	1800	243714	✓	80	129.6	1.06
	1200	2400	243706	✓	72	207.4	1.69

Compliance: BS EN 14190. Wallboard complies to BS EN 520 and is categorised as Type A. Vapour Check Performance: 12.5mm Vapour Panel 78.5 MNs/g. Material Pricing Group: I6

TAPERED EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
12.5	1200	2400	243708	✓	72	207.4	1.69
12.5	1200	2700	243712	✗	60	194.4	1.59
15.0	1200	2400	243716	✓	60	172.8	1.76

Compliance: BS EN 14190 Wallboard complies to BS EN 520 and is categorised as Type A. Vapour Check Performance: 12.5mm Vapour Panel 78.5 MNs/g. Material Pricing Group: I6

Knauf Fire Panel

Knauf Fire Panel elevates the fire resistance of a plasterboard. The additives in Knauf Fire Panel make it an ideal board for use in Knauf Performer partitions lining escape routes, Knauf Shaftwall, Knauf MF ceilings systems and structural steel encasement. Easily identifiable by the pink paper face, the boards can be finished with ready-mixed finishes, traditional plaster or direct decoration. Use with the full Knauf metal, jointing and fixing range to ensure performance.

SQUARE EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
12.5	900	1800	613376	✓	64	103.7	1.05
	1200	2400	243481	✓	60	172.8	1.74

Compliance: BS EN 520, Types A and F. Material Pricing Group: P5

TAPERED EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
12.5	1200	2400	244412	✓	60	172.8	1.74
		2700	243489	✓	60	194.4	1.96
		3000	243493	✓	48	172.8	1.74
15.0	1200	2400	243501	✓	48	138.2	1.67
		2700	243507	✓	48	155.5	1.89
		3000	243513	✓	42	151.2	1.83

Compliance: BS EN 520, Types A and F. Material Pricing Group: P5

Knauf Sound Panel

Knauf Sound Panel offers enhanced levels of sound performance and a greater density, making it ideal for residential applications or where a minimum of 10kg/m² is required.

TAPERED EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
12.5	1200	2400	404632	✓	32	92.1	0.94
		2700	414141	✗	28	90.7	0.92

Compliance: BS EN 520, Types A and D. Material Pricing Group: I7

Knauf Soundshield Plus

Knauf Soundshield Plus is the ideal plasterboard where sound reduction is of particular importance. Its high mass and tuned core give enhanced acoustic performance, excellent fire resistance and severe duty impact rating when used as part of a Knauf Performer, Isolator or Silent Spacesaver partition system. Use with Knauf Performance Plus Screws and the full range of Knauf jointing and finishing products.

TAPERED EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
12.5	1200	2400	292622	✓	56	161.2	1.87
		2700	292620	✓	48	155.5	1.81
		3000	292627	✓	42	151.2	1.75
15.0	1200	2400	292646	✓	48	138.2	1.84
		2700	292677	✓	42	136.1	1.81
		3000	292678	✓	36	129.6	1.72

Compliance: BS EN 520, 12.5= Types A and D, 15mm = Types A, D, F and I. Material Pricing Group: I7



Use with Performance Plus Screws with Soundshield Plus, see page 45



Knauf Moisture Panel

Knauf Moisture Panel has been purpose designed for high performance in internal areas of high humidity such as bathrooms and kitchens. Made with unique additives and paper, the green faced board is fully tested for use with Knauf Performer ‘C’ Stud Partitions. Use with the full range of Knauf jointing products and finishes. Apply Knauf Betokontakt prior to applying gypsum (not needed for Knauf Airless finish).



SQUARE EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
12.5	1200	2400	292680	✓	60	172.8	1.54
Compliance: BS EN 520, Types A and H2. Material Pricing Group: P2							

TAPERED EDGE




Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
12.5	1200	2400	222210	✓	60	172.8	1.54
		2700	68551	✓	60	194.4	1.73
		3000	243622	✗	54	194.4	1.73
15.0	1200	2400	168091	✓	60	172.8	1.78
		3000	400134	✓	48	172.8	1.78
Compliance: BS EN 520, 12.5= Types A and D, 15mm = Types A, D, F and I. Material Pricing Group: I7							

Use with Knauf Betokontakt, see page 69



Knauf Core Board

Knauf Core Board is purpose designed for use in the Knauf Shaftwall System. It has both fire and moisture resistant qualities. When used in conjunction with Knauf CT Stud, the Knauf Shaftwall System can be built from outside the shaft, making the build easier whilst ensuring performance in a critical build area.



SQUARE EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
19.0	600	3000	81062	✓	32	57.6	0.94
Compliance: BS EN 520, Types A, D, F, H1, I and R. Material Pricing Group: P6							

Use with Knauf Shaftwall System, see page 33



Knauf Coreboard Fillets

Knauf Coreboard Fillets designed for use in Knauf defection head systems, cut to size for ease of install to make your build easier while ensuring performance.



Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Strips per pallet	m²	Tonnes (Approx.)
19.0	52	3000	875970	✗	320	49.92	0.85
19.0	62	3000	875973	✗	288	53.57	0.93
19.0	72	3000	875975	✗	224	48.38	0.82
19.0	94	3000	875976	✗	192	54.14	0.94
19.0	148	3000	875977	✗	96	42.62	0.70

Compliance: BS EN 520, Types A, D, F, H1, I and R. Material Pricing Group: P6

Knauf Performance Plus

Knauf Performance Plus, our highest specification plasterboard, has a high-density core with added performance-enhancing ingredients. The result is a grey faced board with extremely high levels of sound, moisture, fire and impact resistance, ideally suited to schools, hospitals and other large commercial projects. Use with Knauf Performance Plus Screws and apply Knauf Betokontakt before applying gypsum (not required for Airless finish).



TAPERED EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
12.5	1200	2400	400177	✓	60	172.8	2.00
		3000	400185	✗	48	172.8	2.00
15.0	1200	2400	400189	✓	48	138.2	1.78
		3000	400195	✓	36	129.6	1.67

Compliance: BS EN 520, 12.5= Types A and D, 15mm = Types A, D, F and I. Material Pricing Group: I7

Use with Betokontakt, see page 69 and Performance Plus Screws, see page 45



AQUAPANEL®

Knauf AQUAPANEL® Interior Ceiling System

The perfect solution for ceilings exposed to moisture, chlorine and salt.

All components are designed and tested to achieve the highest performance of construction.

Knauf AQUAPANEL® Cement Boards are unaffected by water and made of inorganic materials, which prevents mould from forming and spreading.

Our suspended ceiling structure features metal components coated to achieve a C5 class for corrosion resistance, making it suitable for indoor areas with high humidity and chemicals, such as chlorine.



Build on us.



Knauf Fireboard

Knauf Fireboard is a fleece-lined plasterboard available in a wide range of thicknesses to provide up to two hours of fire protection in structural steel encasement.

SQUARE EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
15.0	1200	2400	61995	✗	40	115.2	1.48
20.0	1200	1800	61996	✗	40	86.4	1.43
25.0	1200	1800	61997	✗	32	69.1	1.43
30.0	1200	1800	61998	✗	26	56.1	1.43

Compliance: EN 15283-1. Material Pricing Group: I9. Subject to minimum order quantities and longer lead times. For details on specifying and ordering Knauf Fireboard, please contact Knauf Customer Services.

Use with Knauf Fireboard Spachtel (Joint Filler), see page 50

Knauf Safeboard unique to Knauf

Knauf Safeboard is an X-ray resistant plasterboard with barium sulphate in its core. Installed using the same methods as traditional plasterboard, Knauf Safeboard effectively removes or significantly reduces the amount of lead needed within X-ray shielding partitions whilst simplifying construction and supply chains.

ROUND TAPERED EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
12.5	625	2400	702784	✗	42	63.0	1.14

Compliance: EN 520. Types D and F. Material Pricing Group: I9 Subject to minimum order quantities and longer lead times. For details on specifying and ordering Knauf Fireboard, please contact Knauf Customer Services.

Use with Knauf Safeboard Joint Filler, see page 60

SCAN HERE TO SEE OUR PARTITION RANGE



Speak to our Specification and Technical Teams about improving the performance of your next project using these products



Experts in Wet Area Solutions.

AQUAPANEL®

AQUAPANEL® cement board systems can be used as an external render carrier board, an internal tile backer for wall and floor applications, within interior ceiling, on flat pitch roof tops and internal and external soffit linings.



To view the products, see pages 92 - 99, or scan here to learn more about the system.

KNAUF

Build on us.

Knauf Vidiwall

Knauf Vidiwall is a gypsum fibreboard manufactured from gypsum and cellulose fibres. This dense, impact resistant sheet material is suitable for all areas of drywall construction where increased durability, rigidity and mechanical strength are required.

STEPPED EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
12.5	1200	2400	423072 ^{CF}	✗	40	115.2	1.71
		2700	423072 ^{CF}	✗	40	129.6	1.93
		3000	423072 ^{CF}	✗	45	162.0	2.40
15.0	1200	2400	423073 ^{CF}	✗	35	100.8	1.80
		2700	423073 ^{CF}	✗	35	113.4	2.02
		3000	423073 ^{CF}	✗	35	126.0	2.25

Compliance: EN 15283-2. Material Pricing Group: I9. Subject to minimum order quantities and longer lead times. For details on specifying and ordering Knauf Vidiwall, please contact Knauf Customer Services. CF not able to order through EDI. Specific product configuration details required. Please contact Knauf Customer Services to order. 'CF' not available to order through EDI as product configuration is required. Please contact Knauf customer services to order.



Use with Vidiwall Screws, see page 46

Insulating Laminates

Knauf XPS Laminate Plus

Extruded polystyrene bonded to 9.5mm Knauf Wallboard offers an enhanced thermal performance at a reduced thickness. Ideal for use in refurbishment, new build and warm roof situations where an enhanced level of thermal insulation is required.

TAPERED EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
27	1200	2400	268262	✓	36	103.6	0.72
35	1200	2400	268264	✗	28	80.6	0.59
40	1200	2400	268265	✗	25	72.0	0.54
45	1200	2400	268266	✗	22	63.4	0.48
55	1200	2400	268267	✗	16	46.1	0.37

Compliance BS EN 13950. Material Pricing Group: P7. Thermal Conductivity: 0.033W/mK. MOQ: 1 pallet. Loading Guide: 20 pallets for a full load/10 pallets for a half load on an artc vehicle.*

Plasterboard Accessories

Our Plaster Accessories have been developed to perfectly complement our high-quality Knauf Plaster and Ready-mixed Finishes range.

Knauf Wallboard Primer

Knauf Wallboard Primer is a surface treatment that equalises suction across plasterboard joints prior to decoration. Apply with a brush or roller.



Tub Size (L)	Material No.	Ex Stock	Pallet Details	
			Tubs	Tonnes (Approx.)
12	258279	✓	36	0.54
Material Pricing Group: P9. Shelf life: 9 months. Estimating guide: approximately 133m² per tub (one coat). Available in part pallet quantities.				

Knauf Plasterboard Adhesive (Bonding Compound)

A multi-purpose gypsum-based adhesive used to direct bond Knauf Plasterboards and Knauf Insulating Laminates to masonry surfaces.

Note: For backgrounds that either have high suction or low suction, use Knauf High Suction Plasterboard Primer or Knauf Betokontakt respectively. See **p 67**.



bag Size (kg)	Material No.	Ex Stock	Pallet Details	
			Bags	Tonnes (Approx.)
25	258166	✓	60	1.50
Compliance: BS EN 14496. Material Pricing Group: PB. Shelf life: 4 months. Estimating guide: 4.6m² per bag (dot and dab).				

Knauf Cove

Decorative plaster moulding with a paper face for direct application of paint finishes.



Dimensions (mm)		Material No.	Ex Stock	Pack Details		
Width	Length			Packs per Pallet	Lengths per Pack	Tonnes (Approx.)
127	3000	258395	✓	40	5	0.56
	3600	258399	✗	50	5	0.84
90	3000	258397	✓	39	7	1.06
Orders must be placed for whole packs. Compliance BS EN 14209. Material Pricing Group: PC						

Knauf Cove Adhesive

Gypsum-based adhesive to affix Knauf Cove. One bag is sufficient to fix 18–24 linear metres of cove.



Cartridge Size	Material No.	Ex Stock	Pack Details	
kg			Bags	Tonnes (Approx.)
5	258171	✓	180	0.9
Shelf life: 4 months. Compliance: BS EN 14496. Available as part pallet. Material Pricing Group: PC				

Related Products

Knauf Intumescent and Acoustic Mastic: See **p 50**. Putty Pads: See **p 50**.



3 METAL SECTIONS

Combining maximum performance with minimum fuss, Knauf Metal Sections are easy to install in any interior.

They are manufactured using high quality steel and are available in a wide range of sizes.

Partition Studs

Knauf ‘C’ Studs, Acoustic ‘C’ Studs, ‘I’ Studs and ‘MW’ Studs are the essential components for creating a number of Knauf partition systems. When used with Knauf ‘U’ Channels these partition studs can be used to achieve a wide range of performance criteria and varying partition heights.

Knauf ‘C’ Studs

Galvanised lightweight steel section for use in non-load-bearing Knauf partition systems.

Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
0.55	50	2400	35	243861	✓	10	14
		2500	35	243863	✗	10	15
		2700	35	243865	✓	10	15
		3000	35	243869	✓	10	17
		3600	35	243870	✓	10	21
	60	3000	35	243876	✓	10	18
		3600	35	243877	✗	10	22
	70	2400	35	243880	✓	10	16
		2700	35	243887	✓	10	18
		3000	35	243889	✓	10	20
		3600	35	243898	✓	10	24
		4200	35	243909	✓	10	28
		3600	35	243923	✗	10	26
		4200	35	243930	✗	10	31
		2700	35	243847	✗	10	27
	146	3000	35	243848	✗	10	30
		3600	35	243849	✗	10	35
		4200	35	243851	✓	10	41
	70	3600	35	243917	✗	10	30
		4200	35	243919	✗	10	35
0.7	92	3600	35	243933	✗	10	34
		4200	35	243935	✗	10	40
	146	4200	35	243858	✗	10	53

Compliance: BS EN 14195. Estimating Guide: 1.67 linear metres per m² partition (based on 600mm centres). Material Pricing Group: PE

Knauf AquaPanel Acoustic C Stud

Galvanised lightweight steel section for use in non-load-bearing Knauf Aquapanel partition systems, specifically designed to improve the robustness and acoustic performance of the resulting partition.

Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
0.6	50	2400	50	243820	✗	10	15
		2700	50	243821	✗	10	16
		3000	50	243823	✓	10	17
	70	2400	50	243824	✗	10	18
		3000	50	243826	✗	10	22
		3600	50	243829	✓	10	26
		4200	50	243839	✗	10	30

Compliance: BS EN 14195. Estimating Guide: 1.67 linear metres per m2 partition (based on 600mm centres). Material Pricing Group: PE

Knauf ‘I’ Studs

High-quality galvanised lightweight steel sections for use in non-load-bearing Knauf partition system to achieve greater maximum heights than Knauf C Studs. I Studs can also be used as part of a Knauf Independent I Stud Lining system.

Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
0.55	50	2700	40	243944	✓	10	21
		3000	40	243947	✓	10	23
	60	3600	40	243952	✓	10	34
		4200	40	243954	✗	10	40
0.7	60	3600	40	449759	✗	10	43
		4200	40	449712	✗	10	51
	70	3600	40	243958	✓	10	39
		4200	40	243963	✓	10	46
0.9	92	5000	40	243973	✓	10	77
		6000	40	243974	✓	10	93
	146	6000	40	243941	✗	10	116

Compliance: BS EN 14195. Estimating Guide: 1.67 linear metres per m2 partition (based on 600mm centres). Material Pricing Group: PF

Knauf ‘MW’ Acoustic Stud

Galvanised lightweight steel section for use in non-load-bearing Knauf partition systems where increased acoustic performance is required.

Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
0.55	70	2700	40	884410	✓	10	23.66
0.55	70	3000	40	884415	✓	10	26.29
0.55	70	3700	40	884458	✓	10	32.42
0.55	70	4200	40	884452	✓	10	36.81
0.55	70	5000	40	884446	✗	10	43.82
0.55	92	2700	40	884449	✗	10	26.22
0.55	92	3000	40	884448	✗	10	29.14
0.55	92	3700	40	884444	✗	10	35.94
0.55	92	4200	40	884451	✗	10	40.8
0.55	92	5000	40	884450	✗	10	48.57

Compliance: BS EN 14195. Estimating Guide: 1.67 linear metres per m² partition (based on 600mm centres). Material Pricing Group: PE

Knauf Resilient Bar

Robust Detail compliant resilient metal section which is fixed to floors and partitions to reduce direct sound transmission. Knauf Resilient Bar may be suitable for use in conjunction with Robust Details.



Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Length	Height			Lengths/Pack	kg (Approx.)
0.55	50	3000	15	156828	✓	10	11

Compliance: BS EN 14195. Material Pricing Group: PO

Partition ‘U’ Channels

‘U’ Channels

Galvanised steel section for use as the standard head and floor track. For use in Knauf partitions and wall linings.



Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
0.55	52	3000	25	243994	✓	10	13
	62	3000	25	243995	✓	10	14
	72	3000	25	243996	✓	10	16
	94	3000	25	243997	✓	10	18
	148	3000	25	243993	✓	10	25

Compliance: BS EN 14195. Estimating Guide: 2 linear metres per metre run of partition, head and floor track. Material Pricing Group: PE

Knauf Deep 50mm Flange ‘U’ Channel

Galvanised steel section for use as an optional head track where increased deflection is expected. *For use in Knauf partition systems.



Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
0.60	52	3000	50	243999	✓	10	25
	72	3000	50	255951	✓	10	27

Compliance: BS EN 14195. Estimating Guide: 1 linear metre per metre run of partition, head track only. Material Pricing Group: PE

Knauf Deep 70mm Flange ‘U’ Channel

Galvanised steel section for use as an optional head track where increased deflection is expected. *For use in Knauf partition systems.



Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
0.70	52	3000	70	244000	✓	10	32
	62	3000	70	255950	✓	10	33
	72	3000	70	255953	✓	10	35
	94	3000	70	255955	✓	10	39
	148	3000	70	243998	✓	10	47

Compliance: BS EN 14195. Estimating Guide: 1 linear metre per metre run of partition, head track only. Material Pricing Group: PE

Knauf Extra Deep 100mm Flange ‘U’ Channel

Galvanised steel section for use as an optional head track where increased deflection is expected. *For use in Knauf partition systems.



Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
0.70	62	3000	100	875968	✓	10	4.3kg
0.70	72	3000	100	876002	✓	10	4.5kg
0.70	94	3000	100	876204	✓	10	4.8kg
0.70	148	3000	100	876205	✓	10	5.8kg

Compliance: BS EN 14195. Estimating Guide: 1 linear metre per metre run of partition, head track only. Material Pricing Group: PE

Shaftwall System

Knauf Shaftwall systems offer economic solutions to provide non-load-bearing lift or stair enclosures, utilising a lightweight framework built from one side.

Use with Knauf Core Board, see page 19 

Knauf ‘C-T’ Stud

Unique galvanised steel section used in the Knauf Shaftwall system to allow quick and safe construction from one side with the minimum number of components.



Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
0.92	60	3000	38.5	243804	✓	10	42
		4500	38.5	243811	✓	10	63
	92	4500	38.5	243818	✓	10	73
		5500	38.5	243819	✗	10	89
	146	5500	38.5	243801	✗	10	110
		6500	38.5	243802	✗	10	130

Compliance: BS EN 14195. Estimating Guide: 1.67 linear metres per m2 of Shaftwall (based on 600mm centres). Material Pricing Group: PN

Knauf ‘J’ Channel

High-quality galvanised steel section used as head and floor track and perimeter framing section of the Knauf Shaftwall system.



Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
0.92	62	3000	30/60	243977	✓	10	32
		4500	30/60	243983	✓	10	49
	94	4500	30/60	243988	✓	10	59
		5500	30/60	243989	✗	10	72
	148	5500	30/60	243975	✗	10	93
		6500	30/60	243976	✗	10	110

Compliance: BS EN 14195. Estimating Guide: 2 linear metres per metre run of Shaftwall, head and floor track. Material Pricing Group: PN

Knauf Core Board Channel

High-quality galvanised steel section used to provide fixing for horizontal Knauf Core Board joints to ensure fire protection of the Knauf Shaftwall system.



Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
0.55	20	3600	10/20	243799	✓	10	8

Compliance: BS EN 14195. Estimating Guide: 1 linear metre per metre run of Shaftwall. Material Pricing Group: PN

Wall and Ceiling Lining Systems

Knauf ‘C’ Channel

Galvanised lightweight steel section for use in Knauf wall lining systems and Knauf C-Form Ceiling Systems.




Dimensions (mm)			Material No.	Ex Stock	Pack Details	
Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
47	2400	17	243792	✗	10	11
	2700	17	243795	✓	10	12
	3000	17	70887	✓	10	13
	4000	17	70889	✓	10	18

Compliance: BS EN 14195. Estimating Guide: 1.67 linear metres per m² of wall lining (based on 600mm centres). Material Pricing Group: PG

Knauf Channel Intersection Connector

Locates primary and secondary channels in the Knauf C-Form Ceiling Systems.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
a	b			Items/Pack	kg (Approx.)
36	49	258298	✗	100	2

Compliance: BS EN 14195. Estimating Guide: 1.1 Connectors per m2 of C-Form ceiling. Material Pricing Group: PG

Knauf ‘C’ Channel Connector

Used to join two sections of Knauf ‘C’ Channel in Knauf C-Form Ceiling Systems.



Dimensions (mm)			Material No.	Ex Stock	Pack Details	
Webb	Flange	Width			Items/Pack	kg (Approx.)
45	15	98	158361	✗	100	3

Compliance: BS EN 14195. Material Pricing Group: PG

Knauf ‘U’ Channel – Perimeter Support

Galvanised steel section for use as standard head and floor track for Knauf Wall Liner system and as perimeter channel for Knauf C-Form Ceiling Systems.



Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
0.55	20	3000	20/30	255956	✓	10	9

Compliance: BS EN 14195. Estimating Guide: 2 linear metres per metre run of wall liner. 1 linear metre per linear metre of perimeter for ceiling systems. Material Pricing Group: PE

Knauf Universal Bracket

Supplied flat, the Knauf Universal Bracket locates the Knauf ‘C’ Channel to the background support. Can be separated to form 2x single channel hangers. For use in Knauf Wall Liner and C-Form Ceiling Systems.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Webb	Flange			Items/Pack	kg (Approx.)
46	127	258291	✓	100	7

Compliance: BS EN 14195. Estimating Guide: Fix at 900mm vertical centres for wall lining. 0.7 hangers per m² of ceiling: C-Form. Material Pricing Group: PG

Knauf Soffit Cleat

Cleat to connect ceiling system to the structural soffit of the building. Pre-drilled to take the required fixings.



Dimensions (mm)	Material No.	Ex Stock	Pack Details	
			Items/Pack	kg (Approx.)
25 x 25	258329	✗	100	2

Compliance: BS EN 14195. Material Pricing Group: PG

NOTE: for Strap Hanger, please see **p37**

MF Ceiling System

Knauf MF Connecting Clip

Secures the Knauf MF Ceiling Channel to the Knauf MF Primary Support Channel.

Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Gauge				Items/Pack	kg (Approx.)
2.65		258294	✗	200	2
Compliance: EN 14195. Material Pricing Group: PG					

Knauf MF Ceiling Channel

Galvanised steel main channel section for the Knauf MF Ceiling system to which the Knauf Plasterboard is fixed. Always fix the board using Knauf Drywall Screws.

Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Length	Depth	Width			Lengths/Pack	kg (Approx.)
0.55	3600	26	80	243990	✓	50	97
Compliance: EN 14195. Estimating Guide: 1.67 linear metres per m2 of ceiling (based on 600mm centres with 15mm plasterboard). Material Pricing Group: PG							

Knauf MF Perimeter Channel

Galvanised steel section to be used around the perimeter of Knauf MF Ceiling systems.

Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
0.55	27	3600	20/30	243991	✓	20	22
Compliance: EN 14195. Estimating Guide: 1 linear metre per linear metre of perimeter for ceiling systems. Material Pricing Group: PG							

Knauf MF Primary Support Channel

Galvanised steel section to be used as the main cross-section and hanger support section of the Knauf MF Ceiling system.

Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
0.80	45	3600	15	243992	✓	20	34
Compliance: EN 14195. Estimating Guide: 0.83 linear metres per m² of ceiling (for single or double layered systems). Material Pricing Group: PG							

Knauf MF Nut and Bolt

Nut and bolt for fixing strap hanger to the soffit cleat.

Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Diameter				Items/Pack	kg (Approx.)
6		258293	✗	200	3
Material Pricing Group: PG					

Knauf Strap Hanger

Suspension strap to support Knauf C-Form and Knauf MF Ceiling systems, this product connects to the soffit cleat and can be simply cut to the length required for ease of installation.

Dimensions (mm)			Material No.	Ex Stock	Pack Details	
Gauge	Length	Width			Items/Pack	kg (Approx.)
0.55	25000	25	258287	✗	–	–
Compliance: EN 14195. Material Pricing Group: PG						

CD Ceiling and Wall Liner

Knauf CD ‘U’ Mounting Bracket

Locates Knauf CD Channel to background support. Supplied with 35mm self-tapping fixing screws.



Dimensions (mm)			Material No.	Ex Stock	Pack Details	
Size/Webb	Flange	Length			Items/Pack	kg (Approx.)
53	30	125	258290	✖	100	7
Compliance: EN 13964. Material Pricing Group: PG						

Knauf CD ‘C’ Channel

Galvanised lightweight steel section for use as a primary and secondary support channel for Knauf CD and Wall Liner systems.



Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Flange	Length			Lengths/Pack	kg (Approx.)
0.55	60	27	3000	60135	✖	10	21
Compliance: EN 13964. Material Pricing Group: PG							

Knauf CD ‘U’ Channel

Galvanised steel section for use with the Knauf CD Ceiling and Wall Liner systems.



Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size/Webb	Flange	Length			Lengths/Pack	kg (Approx.)
0.55	30	27	3000	322589	✖	10	21
Compliance: EN 13964. Material Pricing Group: PG							

Knauf CD Channel Hanger


Locates into the primary support channel in the Knauf CD Ceiling system.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Width			Items/Pack	kg (Approx.)
90	58.5	258292	✖	100	4
Compliance: EN 13964. Material Pricing Group: PG					

Knauf CD Channel Intersection Connector

Connects primary and secondary channels in the Knauf CD Ceiling system.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
a	b			Items/Pack	kg (Approx.)
58	62	24903	✖	100	5
Compliance: EN 13964. Material Pricing Group: PG					

Knauf CD ‘C’ Channel Connector

Used to extend Knauf CD Channel.



Dimensions (mm)			Material No.	Ex Stock	Pack Details	
Size/Webb	Flange	Length			Items/Pack	kg (Approx.)
58.5	25	80	321767	✖	100	10
Compliance: EN 13964. Material Pricing Group: PG						

Metal Section Accessories

Knauf Flat Fixing Plate

Lightweight galvanised steel fixing plate for use within partitions, wall linings and ceilings. Used as a part of a deflection head as well as to improve rigidity or for horizontal board joints where required.



Dimensions (mm)			Material No.	Ex Stock	Pack Details	
Gauge	Size	Length			Lengths/Pack	kg (Approx.)
0.70	70	2400	258300	✓	10	12
Compliance: BS EN 14195. Material Pricing Group: PO						

Knauf Fixing Channel

Lightweight galvanised steel fixing plate with flanges for additional rigidity over the flat fixing plate, for use with partitions and wall linings.



Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size	Length	Flange			Lengths/Pack	kg (Approx.)
0.70	96	2400	9.5	258299	✗	10	16
Compliance: BS EN 14195. Material Pricing Group: PO							

Knauf Angle Sections

Galvanised mild steel angles for use with partitions, column and beam encasements and suspended ceilings.



Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size	Length	Angle (deg°)			Lengths/Pack	kg (Approx.)
0.70	25 x 25	3000	90	258285	✓	10	11
0.70	25 x 50	3000	90	258286	✓	10	16
0.70	25 x 75	3000	90	875969	✓	10	21
Compliance: BS EN 14195. Material Pricing Group: PO							

Knauf Fixing Clip

Part of the Knauf Encasement system.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Height			Items/Pack	kg (Approx.)
45	28	158076	✓	50	2
Compliance: BS EN 14195. Estimating Guide: 4 clips per linear metre of column. 2 clips per linear metre of beam. Material Pricing Group: PO					



4 FIXINGS AND ACCESSORIES

Well made and expertly crafted, our fully warranted accessories guarantee consistent quality across the Knauf range. Designed with compatibility, endurance and optimum performance in mind.

Fixings

Knauf Drywall Screws – Self Tapping

Self-tapping black phosphate screws with countersunk Ph2 heads for fixing plasterboards to metal framing. Ideal for use with light gauge metal up to 0.7mm thick. Each box includes a Ph2 bit. Head stamped with KF for ease of identification.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Diameter			Items/Pack	kg (Approx.)
25	3.5	258309	✓	1000	1.5
32	3.5	258310	✓	1000	1.8
38	3.5	258311	✓	1000	2.1
42	3.5	258312	✓	1000	2.5
50	3.9	258313	✓	500	1.8
60	4.2	258314	✓	500	2.0
75	4.2	258315	✓	500	3.0

Compliance EN 14566. Estimating Guide: 10 screws per layer per m2 of partition (based on 600mm centres). Material Pricing Group: PD

Knauf Collated Drywall Screws – Self Tapping

Strips of 50 collated black phosphate, self-tapping screws with countersunk Ph2 heads for fixing plasterboards to metal framing. Ideal for use with light gauge metal up to 0.7mm thick. Head stamped with KF for ease of identification.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Diameter			Items/Pack	kg (Approx.)
25	3.5	158103	✓	1000	1.9
35	3.5	158106	✓	1000	2.0
45	3.5	322296	✓	1000	2.7

Compliance EN 14566. Estimating Guide: 10 screws per layer per m2 of partition (based on 600mm centres). Material Pricing Group: PD

Knauf Drywall Screws – Jackpoint Self Drilling

Self-drilling black phosphate screws with countersunk Ph2 heads for fixing plasterboard to metal frame 0.7mm to 1.2mm thick. Each box includes a Ph2 bit. Head stamped with KF for ease of identification.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Diameter			Items/Pack	kg (Approx.)
25	3.5	258318	✓	1000	1.6
35	3.5	258319	✓	1000	2.1
42	3.5	258320	✓	1000	2.4
55	3.5	258321	✓	1000	3.7

Compliance EN 14566. Estimating Guide:10 screws per layer per m2 of partition (based on 600mm centres). Material Pricing Group: PD

Knauf Collated Drywall Screws – Jackpoint Self Drilling

Collated self-drilling black phosphate screw with contersunk cross-heads for fixing plasterboards to metal. Ideal for use with metal from 0.7 to 1.2mm thick. Head stamped with KF for ease of identification.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Diameter			Items/Pack	kg (Approx.)
35	3.5	835056	✓	1000	2.3
42	3.5	835086	✓	1000	2.5

Compliance EN 14566. Estimating Guide:10 screws per layer per m2 of partition (based on 600mm centres). Material Pricing Group: PD

Knauf Drywall Wood Screws

Self-tapping black phosphate coarse threaded wood screws with countersunk Ph2 heads for fixing plasterboard to timber frames. Each box includes a Ph2 bit. Head stamped with KF for ease of identification.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Diameter			Items/Pack	kg (Approx.)
38	3.5	258316	✓	1000	2.1
42	3.5	258317	✓	1000	2.5
50	3.9	656081	✓	500	1.5
65	4.1	656080	✓	500	2.1

Compliance EN 14566. Estimating Guide: 10 screws per layer per m2 of partition (based on 600mm centres). Material Pricing Group: PD



Use Knauf fixings for 100% System Performance Warranty. Genuine Knauf fixings have a KF head stamp.

Knauf Collated Drywall Wood Screws

Strips of 50 collated self tapping black phosphate course thread wood screws with countersunk cross head for fixing plasterboards to timber frames.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Diameter			Items/Pack	kg (Approx.)
38	3.5	834789	✓	1000	2.1
50	4.2	834836	✓	1000	2.3
65	4.2	834843	✓	500	2.1

Compliance EN 14566. Estimating Guide: 10 screws per layer per m2 of partition (based on 600mm centres). Material Pricing Group: PD

Knauf Performance Plus Screws*

Knauf Performance Plus Screws are designed for single and double layer Knauf Performance Plus and Knauf Soundshield Plus partition systems. The Knauf Performance Plus Screws provide a solid fix into plasterboards with a dense consistency. Each box includes a Ph2 bit. Head stamped with KF for ease of identification.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Diameter			Items/Pack	kg (Approx.)
25	3.9	404662	✓	1000	1.9
35	3.9	404663	✓	1000	2.3
45	3.9	404664	✓	1000	2.7

Compliance EN 14566. Material Pricing Group: PD *For use with Knauf Soundshield Plus and Knauf Performance Plus boards.

Knauf Collated Performance Plus Screws*

Strips of 50 Knauf Performance Plus Screws; designed for single and double layer Knauf Soundshield Plus and Knauf Performance Plus partition systems. Head stamped with KF for ease of identification.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Diameter			Items/Pack	kg (Approx.)
25	3.9	525676	✗	1000	1.9
35	3.9	525680	✗	1000	2.3
45	3.9	525682	✗	1000	2.7

Compliance EN 14566. Material Pricing Group: PD *For use with Knauf Soundshield Plus and Knauf Performance Plus boards.

Knauf Wafer Head Screws – Jackpoint Self Drilling

Zinc-coated self-drilling low profile screws with Ph2 heads for metal-to-metal fixing. Ideal for use with heavy gauge metal above 0.7mm thick. Each box includes a Ph2 bit. Head stamped with KF for ease of identification.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Diameter			Items/Pack	kg (Approx.)
14	4.2	258322	✓	1000	1.4
Compliance EN 14566. Material Pricing Group: PD					

Knauf Wafer Head Screws – Self Tapping

Self-tapping black phosphate low profile screws with Ph2 head for metal to metal fixing. Ideal for use with light gauge metal up to 0.7mm thick. Each box comes with a Ph2 bit head stamped with KF for ease of identification.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Diameter			Items/Pack	kg (Approx.)
14	4.2	258323	✓	1000	1.4
Compliance EN 14566. Material Pricing Group: PD					

Knauf Vidiwall Screws

Knauf Vidiwall Screws are designed for single and double layer Knauf Vidiwall partition systems. Knauf Vidiwall Screws provide a solid fix into dense gypsum fibreboards.

Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Diameter			Items/Pack	kg (Approx.)
30	3.5	339277	✗	1000	1.71
45	3.5	339276	✗	1000	2.52
Compliance EN 14566. Material Pricing Group: PD					

Knauf SFS Framing Screws – Boards

Special board to metal framing screw for fixing internal and external boards to external steel frame. Ideal for use where thicker metal is installed.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Diameter			Items/Pack	kg (Approx.)
38	3.8	835358	✓	200	2.3
50	3.8	835359	✓	100	2.5
Compliance EN 14566. Material Pricing Group: PD					




5 PASSIVE FIRE PROTECTION

Knauf offers a full encasement solution for structural steel as well as a range of passive fire protection products for use within Knauf Partition Systems.

Fire Encasement

Knauf Fireboard

Knauf Fireboard is a fleece-lined plasterboard available in a wide range of thicknesses to provide up to two hours of fire protection in structural steel encasement.



SQUARE EDGE

Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
15.0	1200	2400	61995	✗	40	115.2	1.48
20.0	1200	1800	61996	✗	40	86.4	1.43
25.0	1200	1800	61997	✗	32	69.1	1.43
30.0	1200	1800	61998	✗	26	56.1	1.43
Compliance: EN 15283-1. Material Pricing Group: I9. Subject to minimum order quantities and longer lead times. For details on specifying and ordering Knauf Fireboard, please contact Knauf Customer Services.							

Knauf Fireboard Joint Filler and Finish Spachtel

Knauf Fireboard-Spachtel is a gypsum based powder that is mixed with water to form a pliable joint filler. On exposed encasements, Knauf Fireboard-Spachtel can also be used as a finish, providing a smooth surface for decoration.



Dimensions	Material No.	Ex Stock	Pallet Details
weight (kg)			Bags per pallet
10	603402	✗	100
Shelf life: 6 months. Mix ratio: 2.5kg product to 2 litres of water. Working time: 45mins. Available as part pallet quantities.			

Knauf Glass Fibre Tape

Knauf Glasfaser-Fugendeckstreifen is a fibre-glass tape used in all joints in Knauf Fireboard installation.



Dimensions		Material No.	Ex Stock	Pallet Details	
length (m)	Width (mm)			piece per pallet	pack size
25	50	3698	✓	1800	40
Material Pricing Group: P9					

Knauf Hartmut Fixing

Knauf Hartmut is ideal for fixing through the Knauf partition stud to an abutting Knauf Fireboard system.



Dimensions	Width	Material No.	Ex Stock	Pallet Details	
				pack per pallet	pack size
—	50	131376	✗	224	50
Material Pricing Group: PD. Includes M5 x 60mm screw					

Knauf Fixing Clip

Part of the Knauf Encasement system.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Height			Items/Pack	kg (Approx.)
45	28	158076	✓	50	2
Compliance: BS EN 14195. Estimating Guide: 4 clips per linear metre of column. 2 clips per linear metre of beam. Material Pricing Group: PO					

Knauf 'C' Channel

Galvanised lightweight steel section for use in Knauf wall lining systems and Knauf C-Form Ceiling Systems.



Dimensions (mm)			Material No.	Ex Stock	Pack Details	
Size/Webb	Length	Flange			Lengths/Pack	kg (Approx.)
47	2400	17	243792	✗	10	11
	2700	17	243795	✓	10	12
	3000	17	70887	✓	10	13
	4000	17	70889	✓	10	18
Compliance: BS EN 14195. Estimating Guide: 1.67 linear metres per m² of wall lining (based on 600mm centres). Material Pricing Group: PG						

Knauf Angle Sections

Galvanised mild steel angles for use with partitions, column and beam encasements and suspended ceilings.



Dimensions (mm)				Material No.	Ex Stock	Pack Details	
Gauge	Size	Length	Angle (deg°)			Lengths/Pack	kg (Approx.)
0.70	25 x 25	3000	90	258285	✓	10	11
0.70	25 x 50	3000	90	258286	✓	10	16
Compliance: BS EN 14195. Material Pricing Group: PO							



Passive Fire Protection Range

Knauf Intumescent and Acoustic Mastic

Knauf Intumescent and Acoustic Mastic is a rapid curing, water-based acrylic expanding fire resistant mastic. It can be used for linear joint sealing. Colour: Blue.



Type	Size (ml)	Material No.	Ex Stock	Pack Details
				per Pack
Foil	600	258281	✓	12
Material Pricing Group: P9				

Knauf Putty Pads

Sheets of intumescent, mouldable putty designed for use inside and outside plastic electrical sockets. Is fire rated for of up to 2 hours and has an acoustic rating of up to 60dB(Rw) within Knauf systems.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Size	Thickness			Pads per Box	kg (Approx.)
170 x 170	3.5	268269	✓	20	2.2
230 x 170	3.5	268271	✓	20	4.8
Material Pricing Group: PA					

Related Products

Knauf Fire Panel: see **p 16**. Soundshield Plus: see **p 17** and Performance Plus: see **p 19**.



6 JOINTING

Our powdered and ready-mixed jointing range has been developed to give the best possible results and comply with BS EN 13963:2005. It is the ideal choice when bedding tapes and beads, and finishing joints. Can be hand or machine applied. Knauf jointing products give you a smooth finish and are easy to sand.

Powdered Jointing Compounds

Knauf Powdered Jointing Compounds offer smooth mixing, easy application, and reliable performance for plasterboard joint finishing. Knauf Finishing Products should be applied to Knauf Plasterboard to ensure system performance warranty, and as detailed in the GPDA's Product Compatibility Statement.

Knauf Fill & Finish 30 Premium

A fast-setting multi-purpose gypsum-based compound for bedding tapes and beads, as well as finishing. For hand application. 30 minute working time.

Bag Size	Material No.	Ex Stock	Pack Details	
kg			Bags	Tonnes (Approx.)
10	622329	✖	100	1
Shelf life: 9 months. Compliance: EN 13963, Type 3B. Estimating Guide: To bed and fill to shoulders: 45m² per 10kg bag. Available in part pallet quantities. Material Pricing Group: P8				

Knauf Fill & Finish 60 Premium

A fast-setting multi-purpose gypsum-based compound for bedding tapes and beads, as well as finishing. For hand application. 60 minute working time.

Bag Size	Material No.	Ex Stock	Pack Details	
kg			Bags	Tonnes (Approx.)
10	622332	✓	100	1
Shelf life: 9 months. Compliance: EN 13963, Type 3B. Estimating Guide: To bed and fill to shoulders: 45m² per 10kg bag. Available in part pallet quantities. Material Pricing Group: P8				

Knauf Joint Filler Premium

A fast-setting gypsum compound for bedding joints by hand application.

Bag Size	Material No.	Ex Stock	Pack Details	
kg			Bags	Tonnes (Approx.)
10	622340	✓	100	1
20	622342	✓	42	0.84
Shelf life: 9 months. Compliance: EN 13963, Type 3B. Estimating Guide: 55m² per 10kg bag. 110m² per 20kg bag. Available in part pallet quantities. Material Pricing Group: P8				

Knauf Joint Cement Premium

A lightweight air-drying compound for bedding tapes and finishing joints by hand or machine application. Knauf Joint Cement Premium produces an exceptional finish with minimal sanding effort.

Bag Size	Material No.	Ex Stock	Pack Details	
kg			Bags	Tonnes (Approx.)
20	622337	✓	42	0.84
Shelf life: 12 months. Compliance EN 13963, Type 3A. Estimating Guide: For two coats of finish: 80m² per 20kg bag. Available in part pallet quantities. Material Pricing Group: P8				

Knauf Uniflott

Knauf Uniflott is a specially formulated joint compound for use with Knauf perforated plasterboards to create a seamless finish.

Bag Size	Material No.	Ex Stock	Pack Details	
kg			Bags	Tonnes (Approx.)
25	253631	✖	42	1.05
Shelf life: 9 months. Compliance EN 13963, Type 4B. Estimating Guide: One bag will finish approximately 21m² of board. Available in part pallet quantities. Material Pricing Group: P8				

Knauf Uniflott Applicator

Reusable cartridge with spray nozzle for applying Knauf Uniflott into acoustic plate joints with an applicator gun or cartridge press. Easy to clean and insert.

Material No.	Ex Stock	Pack Details
		Items per Pack
4707	✖	1
Material Pricing Group: P9. Available in part pallet quantities.		

Ready-Mixed Jointing Compounds

Knauf Ready-mixed Jointing Compounds offer an easy-to-sand and low shrinkage alternative to traditional jointing compounds. Knauf Finishing Products should be applied to Knauf Plasterboard to ensure system performance warranty, and as detailed in the GPDA's Product Compatibility Statement.

Knauf Fill & Finish

An easy-to-sand jointing compound for bedding tapes and finishing joints in drywall partitions and ceilings. Ready-mixed for quick and easy application.



Tub Size	Material No.	Ex Stock	Pack Details	
kg			Tubs	Tonnes (Approx.)
20	601443	✓	33	0.66

Shelf life: 12 Months. Compliance: EN 13963, Type 3A. Estimating Guide: 30m² per 20kg tub. Material Pricing Group: QP. Available in part pallet quantities.

Knauf Fill & Finish Light

Lightweight ready-mixed compound for bedding tapes and finishing joints in drywall partitions and ceilings. Very low shrinkage finish which is easier to sand than traditional jointing compounds. Suitable for use with Bazooka and Banjo machine application.



Tub Size	Material No.	Ex Stock	Pack Details	
kg			Tubs	Tonnes (Approx.)
5	601462	✓	72	0.36
20	601440	✓	33	0.66

Shelf life: 12 Months. Compliance: EN 13963, Type 3A. Estimating Guide: 4.5m² per 20kg tub / 11.25m² per 5kg tub. Material Pricing Group: QP. Available in part pallet quantities.



Fill & Finish Range

Low Mess
Low Shrinkage
Low VOC*

*Total VOC 28 days <1mg/m³



See our Ready-Mixed products in action by scanning the QR code to watch our Ready-Mixed versus powdered jointing video



Specialist Jointing

Knauf Safeboard Joint Filler

A powdered joint filler for use with Knauf Safeboard X-ray shielding plasterboard.




Tub Size	Material No.	Ex Stock	Pack Details	
kg			Tubs	Tonnes (Approx.)
5	133092	✖	60	0.30
Shelf life: 6 Months. Compliance EN 13963, Type 4B. Estimating Guide: 10m² per 5kg tub. Material Pricing Group:J9. Available in part pallet quantities.				

Jointing Tapes

Knauf Joint Tape

White paper tape for reinforcing joints by hand or machine application. Knauf Joint Tape is recommended on ceilings and to create the strongest joints. Internal corners are made simple with a centerline for easy folding.



Roll Size		Material No.	Ex Stock	Carton Details	
Length (m)	Width (mm)			Rolls	kg (Approx.)
150	51	258337	✓	10	12
Compliance EN 13963. Material Pricing Group: P8					

Knauf Fibre Tape

Multi-purpose self-adhesive tape for reinforcing joints and patch repairs to plasterboard when gypsum based skim coating is used. Not to be used as part of a performance system.



Roll Size		Material No.	Ex Stock	Carton Details	
Length (m)	Width (mm)			Rolls	kg (Approx.)
90	50	493679	✓	24	7.5
Compliance EN 13963. Material Pricing Group: P9					

Knauf Corner Flex Tape

Fibre composite tape for providing protection to external corners of drylined partitions.



Roll Size		Material No.	Ex Stock	Carton Details	
Length (m)	Width (mm)			Rolls	kg (Approx.)
30	62	258336	✖	12	16
Material Pricing Group: P9					

Knauf Fibre-glass Tape

Made from a fibreglass material, the tape provides strong joints which avoid cracking and have a flawless, flat surface when used with Knauf ready-mixed and powdered jointing. Minimal shrinkage is achieved by the tapes lower absorption of water from the filler. Ideal for refurbishments.



Dimensions		Material No.	Ex Stock	Pallet Details	
Length (m)	Width (mm)			Piece per pallet	Pack size
25	50	3698	✖	1800	40
Material Pricing Group: P9					



Jointing Corner Beads

Knauf Paper Faced Metal Corner Beads provide a quick and easy way to produce beautiful, sturdy, cost-effective corners that withstand the wear and tear of normal building use. The beads are installed with a unique paper tape ‘nose coating’ that resists scuffing and fuzzing from knives and sanding. Knauf flexible tapes provide solutions for uneven or curved corners.

Knauf Dallas B1 External Bead

Knauf Dallas B1 External Bead is used to create 90° outside corners. Suitable on any thickness of Knauf Plasterboard.



Dimensions			Material No.	Ex Stock	Pack Details	
Metal (mm)	Paper (mm)	Length (m)			Lengths	kg (Approx.)
16	20.5	2.6	545983	✓	50	17.25
16	20.5	3.0	545994	✓	50	18.6
Material Pricing Group: PA						

Knauf Las Vegas B2 Internal Bead

Knauf Las Vegas B2 Internal Bead is used to create 90° internal corners. Suitable on any thickness of Knauf Plasterboard.



Dimensions			Material No.	Ex Stock	Pack Details	
Metal (mm)	Paper (mm)	Length (m)			Lengths	kg (Approx.)
9.5	16	2.6	547280	✓	50	17.25
9.5	16	3.0	547314	✓	50	22.25
Material Pricing Group: QH						

Knauf Drywall Angle Bead

Galvanised steel corner protection for external corners of drywall partitions.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Size	Length			Lengths/Pack	kg (Approx.)
25 x 25	2400	258333	✓	50	20
25 x 25	3000	258334	✓	50	24
Compliance EN 13658. Material Pricing Group: P9					

Knauf Drywall Movement Control Joint

Aluminium section used to bridge gaps left for expansion and contraction in drywall partitions. Please note: it is not suitable as a central joint for internal plastering.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Gauge	length			Lengths/Pack	kg (Approx.)
60	3048	258335	✓	10	4
Compliance: BS EN 13658. Material Pricing Group: P9					



Jointing Edge Beads

Knauf Flexible Metal Tape

Knauf Flexible Metal Tape allows you to create corners to any angle, even on irregular shaped structures such as cathedral or drop ceilings or bay windows, and a variety of other applications.




Roll Size		Material No.	Ex Stock	Carton Details	
Length (m)	Width (mm)			Rolls	kg (Approx.)
30.5	50	314834	✓	10	18.6

Material Pricing Group: QH

Knauf Drywall Edge Bead

Galvanised steel edge trim for drywall applications. Used to protect exposed plasterboard edges while forming a defined edge to the plasterboard.



Roll Size		Material No.	Ex Stock	Carton Details	
Thickness (mm)	Length (mm)			lengths per pack	kg (Approx.)
12.5	3000	258304	✓	50	25
15	3000	258305	✓	50	27

Compliance EN 13658. Material Pricing Group: P9



Product Compatibility

GPDA (Gypsum Products Development Association) Product Compatibility Statement:

For the purposes of preparation for decoration, gypsum based finishing products (e.g. jointing compounds and finishing plasters) can be applied to the front face of plasterboard manufactured in accordance with BS EN 520 2004 A1+ 2009, provided the products are manufactured in accordance with the current, relevant standard, e.g. Finishing Plaster – BS EN 13279-1: 2008. Jointing Materials – BS EN 13963: 2014, except where:

1. Colour matching is required between plasterboard and jointing.
2. Required by the manufacturer, Moisture Resistant plasterboard variants need to be primed prior to plastering.
3. Specific finishing materials are required by the system warranty provider to maintain or achieve the system performances, for example, fire resistance and acoustic insulation.



Build on us.



7 FINISHING SOLUTIONS

Knauf takes the hassle out of finishing with a full range of finishing materials. From powdered and ready-mixed jointing compounds, tapes and beads through to Knauf Airless Finish, the sprayable modern alternative to traditional gypsum plaster.

Ready-mixed Finish

Knauf ready-mixed Airless Finish is a highly efficient direct alternative to traditional plaster for finishing walls and ceilings. It offers an excellent quality smooth white finish and is purpose-designed for machine application via a high pressure piston pump. Supplied pre-mixed to the correct consistency for spray application, no water for mixing is required on site (just a small amount to prime the machine) and wastage is typically around 1%.

Knauf Airless Finish

Used as a direct finish coat onto smooth backgrounds such as taped and jointed plasterboard, precast panels, aircrete panels or refurbishment over previously decorated surfaces. This product is ideal for smooth finishes over Knauf Plasterboard with a two-coat application onto taped and jointed drylining systems. Knauf Airless Finish is applied 1–2mm thick with a drying time of approximately 12–24 hours prior to decorating. It is applied using an airless high pressure piston pump machine.



Bag Size	Material No.	Ex Stock	Pack Details	
kg			Bags	Tonnes (Approx.)
25	470362	✓	40	1.00

Shelf life: 12 Months. Compliance Standard: EN 15824:2017. Estimating Guide: Approximate consumption: 0.8–1.5kg/m² depending on thickness of application and substrate. Material Pricing Group: 11

Build on us.



Knauf Airless Finish

- Up to 3 times faster than traditional methods
- Reduced water on site and easier clean-up*
- High productivity: 200–250m² per day with 2 people
- Contact Knauftraining@knauf.com to arrange a training session or demo

**Compared to traditional gypsum plaster where water is needed on site for mixing. Leftover Airless Finish is contained within the hopper for the next day, and the empty bag is recyclable.*



Scan here
to watch our
Top Tips video



Ready-mixed Finishes

Knauf Easy Plaster

Knauf Easy Plaster is a ready-mixed lightweight patching plaster specially designed for small to large repairs to cracks in walls and ceilings. It will not shrink or crack and is ideal for filling holes up to 40mm deep with a two-coat application. The plaster can be painted or wallpapered once dry (24 hour drying time).



Tub Size	Material No.	Ex Stock	Pallet Details	
kg			Tubs	Tonnes (Approx.)
2.5	282343	✓	150	0.44
6	282344	✓	60	0.42

Shelf life: 12 Months. Estimating Guide: 0.75m² per litre at 6mm thickness. Available in part pallet quantities. Material Pricing Group: I1

Roller Applied Plaster

Our ready-mixed roller applied plaster products have been designed to be simple and effective to use. Use with a 9” medium pile roller.

Knauf ProRoll Light

Use as a finish on Knauf ProRoll Max or onto plasterboard backgrounds for a superior finish. Apply in coats up to 1mm thick, up to a maximum of 3mm in multiple coats.



Tub Size	Material No.	Ex Stock	Pallet Details	
kg			Tubs	Tonnes (Approx.)
12.5	593010	✓	40	0.5

Shelf life: 12 months. Estimating Guide: Up to 10m² per tub at 1mm thickness. Available in part pallet quantities. Material Pricing Group: I1

Knauf ProRoll Max

Use to level the surface of existing internal walls and ceilings. Ideal for covering textured backgrounds. Use with Knauf ProRoll Light for a superior finish. Apply in coats up to 2mm thick, up to a maximum of 4mm in multiple coats.



Tub Size	Material No.	Ex Stock	Pallet Details	
kg			Tubs	Tonnes (Approx.)
13.5	593011	✓	40	0.54

Shelf life: 12 months. Estimating Guide: Up to 10m² per tub at 1mm thickness. Available in part pallet quantities. Material Pricing Group: I1

Ready-mixed Primers

Knauf Betokontakt

Knauf Betokontakt is a polymer-based product designed to provide a key to backgrounds which are smooth or have limited suction. Can be applied with a brush, roller or by spraying. Use with Knauf Moisture Panel and or Knauf Performance Plus for areas of application of gypsum plaster skim. See **p 18** and **p 19**.



Tub Size	Material No.	Ex Stock	Pallet Details	
kg			Tubs	Tonnes (Approx.)
20	545454	✓	32	0.64

Shelf life: 18 months. Estimating Guide: Up to 88m² per tub. No need to dilute. Available in part pallet quantities. Material Pricing Group: I2






8 ACOUSTIC AND DESIGN

An expansive selection of acoustic ceiling and wall lining tiles with different expressions, design opportunities and acoustic profiles.

Choose the right range for your ceiling

Choosing the right ceiling tile for the right application can be difficult, which is why we have created the selector below to help make specification easier.

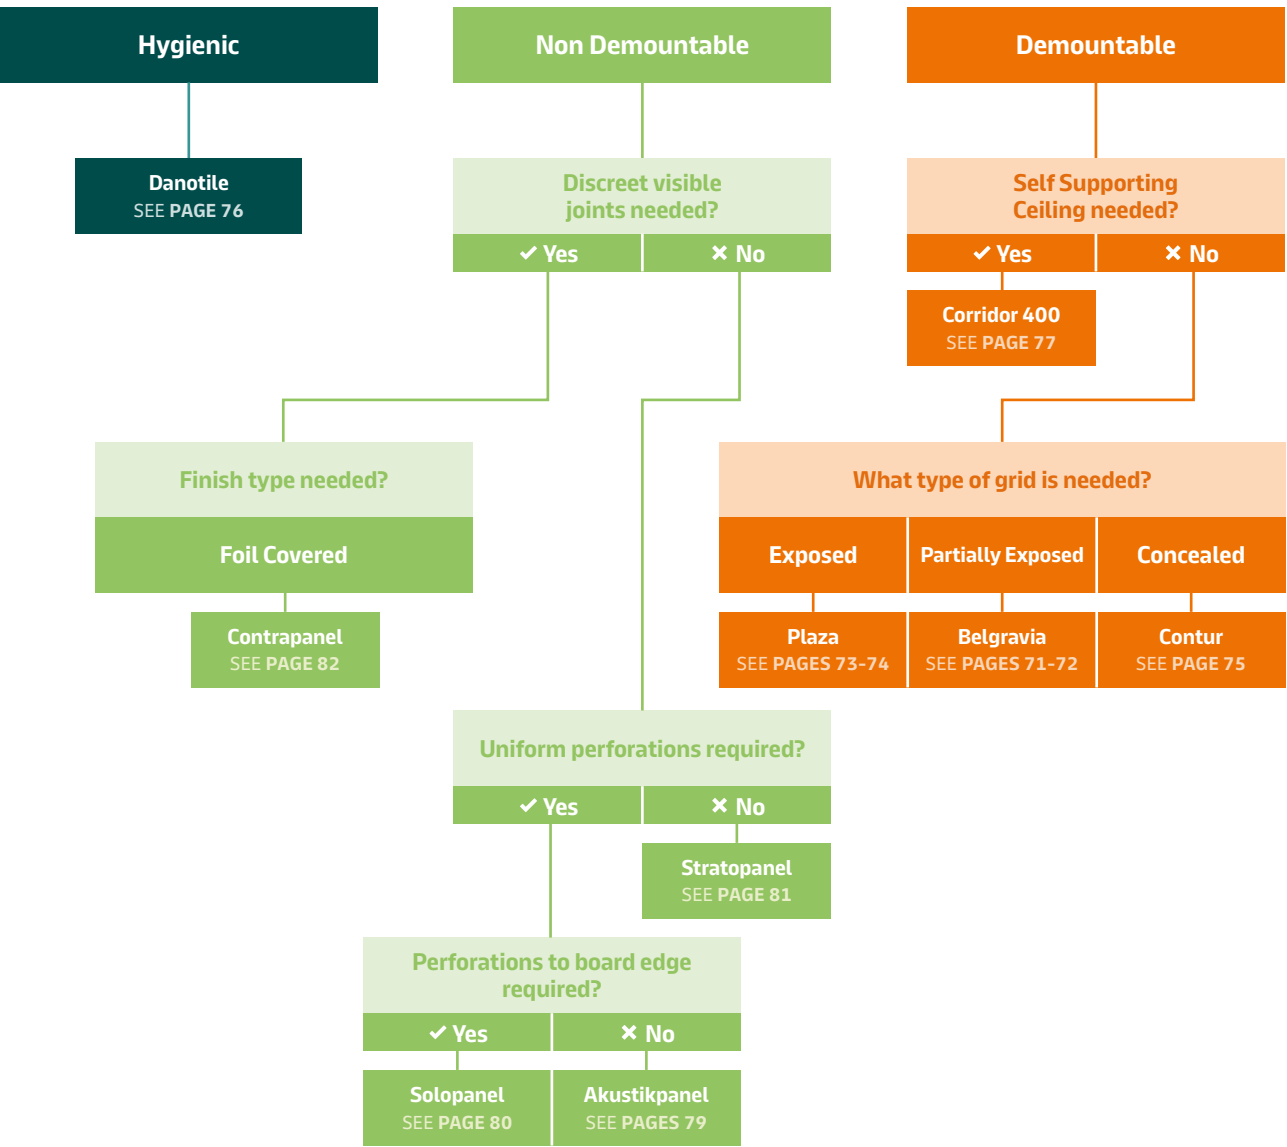

Demountable Ceilings – T-grid

Knauf Belgravia S24

Belgravia acoustic tiles offer a classic, highly robust and durable acoustic ceiling with a high acoustic performance. Belgravia suspended ceiling, with its recessed grid, is exceptionally easy to install and demount for servicing. This type of gypsum ceiling is ideal for buildings requiring easy maintenance and servicing of installations, while retaining the highest acoustic performance and a calm, contemporary ceiling expression.



PRODUCT DETAILS

EDGE E S24
Partially exposed grid.
Non-perforated border around the edge of the tile.
Surface: white painted.

MICRO Square 3x3mm c/c 8.33mm	GLOBE Circle Ø6mm c/c 15mm	QUADRIL Square 12x12mm c/c 30mm	TANGENT Obround 4x14mm c/c 10/20mm	PLAIN

STANDARD PRODUCTS

Description	Edge	Design	Dimensions (mm)			Material No.	Ex Stock	Pack Details	
			Thickness	Width	Length			Items/ Pack	Weight (kg)
MICRO	E	M1	12.5	600	600	58846	✗	8	25
GLOBE	E	G1	12.5	600	600	58844	✗	8	25
QUADRIL	E	Q1	12.5	600	600	58845	✗	8	25
TANGENT*	E	T1	12.5	600	600	172971	✗	8	25
PLAIN	E	P1	12.5	600	600	58563	✗	8	28

Compliance: EN 14190. Material Pricing Group: QL

All recommendations in this document are Knauf guidance only.
Final specification is dependent upon performance requirements
and existing build-up.



For further information, contact our Technical Team:
Phone 0800 521 050 (option 2): 09:00 –17:00
OR Write to technical-uk@knauf.com
We have a specification to suit your requirements!




*Due to the bespoke manufacture of these high performance acoustic ceiling tiles, a start up fee may be applied.
Minimum order quantities and additional delivery charges may apply. Please contact Knauf Customer Services for more information.





Knauf Belgravia S15

Belgravia acoustic tiles offer a classic, highly robust and durable acoustic ceiling with a high acoustic performance. Belgravia suspended ceiling, with its recessed grid, is exceptionally easy to install and demount for servicing. This type of gypsum ceiling is ideal for buildings requiring easy maintenance and servicing of installations, while retaining the highest acoustic performance and a calm, contemporary ceiling expression.

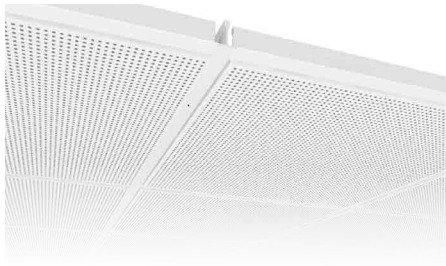

PRODUCT DETAILS

 EDGE E S15 Partially concealed grid. Non-perforated border around the edge of the tile. Surface: white painted.			 EDGE E+ S15 Partially concealed grid. Perforated to board edge. Surface: white painted.		
					
MICRO Square 3x3mm c/c 8.33mm	GLOBE Circle Ø6mm c/c 15mm	QUADRIL Square 12x12mm c/c 30mm	UNITY 3 Square 3.5x3.5mm c/c 8.33mm	UNITY 4 Circle Ø4mm c/c 10mm	

STANDARD PRODUCTS


Description	Edge	Design	Dimensions (mm)			Material No.	Ex Stock	Pack Details	
			Thickness	Width	Length			Items/ Pack	Weight (kg)
MICRO	E	M1	12.5	600	600	58843	✗	8	26
GLOBE	E	G1	12.5	600	600	58841	✗	8	26
QUADRIL	E	Q1	12.5	600	600	58842	✗	8	26
UNITY 3	E+	U3	12.5	600	600	469237	✗	8	26
UNITY 4	E+	U4	12.5	600	600	532691	✗	8	26
Compliance: EN 14190. Material Pricing Group: QL									

E+ Option has perforations to the edge of the board




Knauf Plaza S15 & S24

Plaza acoustic ceiling tiles are designed with a straight edge for installation in an exposed T-grid, ensuring a highly robust suspended ceiling. The perforated ceiling tiles are made from gypsum, providing easy access to services in the ceiling void, quick fitting of fixtures, and a long service life thanks to the durability of the sound absorbing material.

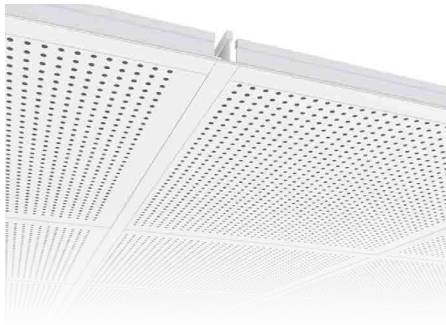

PRODUCT DETAILS

 EDGE A S15/S24 (9.5mm) Exposed grid. Non-perforated border around the edge of the tile. Surface: white painted.		
		
MICRO Square 3x3mm c/c 8.33mm	GLOBE Circle Ø6mm c/c 15mm	QUADRIL Square 12x12mm c/c 30mm


All 9.5mm Plaza tiles can be used with both 15mm (S15) and 24mm (S24) grids.

STANDARD PRODUCTS



Description	Edge	Design	Dimensions (mm)			Material No.	Ex Stock	Pack Details	
			Thickness	Width	Length			Items/ Pack	Weight (kg)
MICRO	A	M1	9.5	600	600	58838	✗	10	23
GLOBE	A	G1	9.5	600	600	58825	✗	10	23
QUADRIL	A	Q1	9.5	600	600	58824	✗	10	23
Compliance: EN 14190. Material Pricing Group: QL									

Knauf Plaza S15 & S24

Plaza acoustic ceiling tiles are designed with a straight edge for installation in an exposed T-grid, ensuring a highly robust suspended ceiling. The perforated ceiling tiles are made from gypsum, providing easy access to services in the ceiling void, quick fitting of fixtures, and a long service life thanks to the durability of the sound absorbing material.

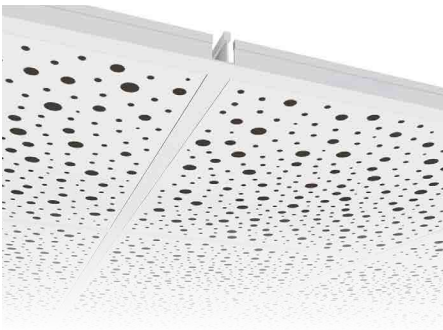

PRODUCT DETAILS

	EDGE A S15/S24 (12.5mm) Exposed grid. Non-perforated border around the edge of the tile. Surface: white painted.		EDGE A+ S15/S24 (12.5mm) Exposed grid. Perforations to tile edge. Surface: white painted.
All 12.5mm Plaza tiles with an A edge can be used with both the 15mm (S15) or 24mm (S24) grids. All 12.5mm Plaza tiles with an A+ edge must be used with the relevant 15mm (S15) or 24mm (S24) grid.			
			
TANGENT Obround 4x14mm c/c 10/20mm	UNITY 3 Square 3.5x3.5mm c/c 8.33mm	UNITY 4 Circle Ø4mm c/c 10mm	UNITY 8 15 20 Various circles Ø8/15/20mm

STANDARD PRODUCTS


Description	Edge	Design	Dimensions (mm)			Material No.	Ex Stock	Pack Details	
			Thickness	Width	Length			Items/ Pack	Weight (kg)
TANGENT	A	T1	12.5	600	600	173226	✗	8	26
UNITY 3	A+	U3	12.5	600	600	469233 (S15)	✗	8	26
	A+	U3	12.5	600	600	473243 (S24)	✗	8	26
UNITY 4	A+	U4	12.5	600	600	532687 (S24)	✗	8	26
U8 15 20	A+	U8 15 20	12.5	600	600	473245 (S24)	✗	8	26
Compliance: EN 14190. Material Pricing Group: QL									

A+ Option has perforations to the edge of the board 



^{CF} not able to order through EDI. Specific product configuration details required. Please contact Knauf Customer Services to order.
Minimum order quantities and additional delivery charges may apply. Please contact Knauf Customer Services for more information.
*Minimum order quantity 50m²

Knauf Contur S24

Contur offers simple aesthetics combined with high functionality. Once installed, Contur acoustic ceiling tiles conceal the T-grid, offering an opportunity to create a monolithic acoustic ceiling that is completely demountable. Contur acoustic tiles require low installation depth (down to 63mm) and are therefore ideal as a suspended ceiling in renovation projects.

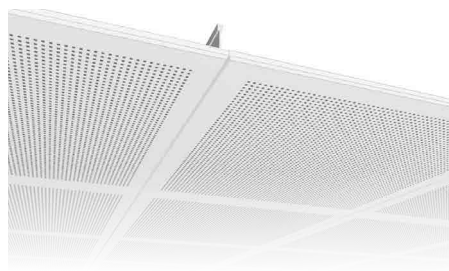

PRODUCT DETAILS

	EDGE D Concealed grid. Non-perforated border around the edge of the tile. Surface: white painted.						EDGE D+ Concealed grid. Perforated to board edge. Surface: white painted.	
								
MICRO Square 3x3mm c/c 8.33mm	GLOBE Circle Ø6mm c/c 15mm	QUADRIL Square 12x12mm c/c 30mm	TANGENT Obround 4x14mm c/c 10/20mm	PLAIN		UNITY 3 Square 3.5x3.5mm c/c 8.33mm	UNITY 4 Circle Ø4mm c/c 10mm	UNITY 8 15 20 Various circles Ø8/15/20mm

STANDARD PRODUCTS


Description	Edge	Design	Dimensions (mm)			Material No.	Ex Stock	Pack Details	
			Thickness	Width	Length			Items/ Pack	Weight (kg)
MICRO	D	M1	12.5	600	600	54460	✗	8	29
GLOBE	D	G1	12.5	600	600	24799	✗	8	29
QUADRIL	D	Q1	12.5	600	600	24804	✗	8	29
TANGENT*	D	T1	12.5	600	600	173220	✗	8	29
PLAIN	D	P1	12.5	600	600	24929	✗	8	31
UNITY 3	D+	U3	12.5	600	600	471331	✗	8	29
UNITY 4	D+	U4	12.5	600	600	532683	✗	8	29
U8 15 20	D+	U8 15 20	12.5	600	600	471325	✗	8	29
Compliance: EN 14190. Material Pricing Group: QL									

 D+ Option has perforations to the edge of the board

*Due to the bespoke manufacture of these high performance acoustic ceiling tiles, a start up fee may be applied.
Minimum order quantities and additional delivery charges may apply. Please contact Knauf Customer Services for more information.

Knauf Danotile

Danotile is a high performance hygiene ceiling tile, suitable for rooms with high cleaning and infection control requirements. The white foil covered robust surface tolerates tough cleaning and disinfection agents as well as pH levels from 2.5-13. As a clean-room (M1 and M10 microbiological class NF S 90-351) and ISO 4 (to ISO 14644-1) certified gypsum ceiling, Danotile is widely used in healthcare facilities and kitchens.

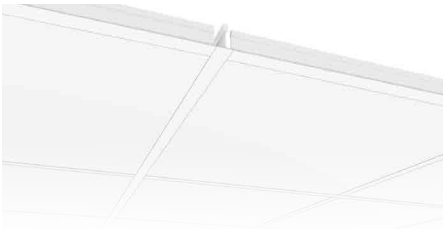

PRODUCT DETAILS



EDGE A S15/S24 (6.5mm/9.5mm)
Exposed grid.
Surface: white painted.

All 6.5mm and 9.5mm Danotile can be used with both 15mm (S15) and 24mm (S24) grids.

	
PLAIN	

STANDARD PRODUCTS

Description	Edge	Design	Dimensions (mm)			Material No.	Ex Stock	Pack Details	
			Thickness	Width	Length			Items/ Pack	Weight (kg)
PLAIN	A	P1	6.5	600	600	57998	✗	280	696
	A	P1	6.5	600	1200	57999	✗	140	696
	A	P1	9.5	600	600	227092	✗	180	572
	A	P1	9.5	600	1200	227093	✗	90	572

Compliance: EN 14190. Material Pricing Group: QK

Minimum order quantities and additional delivery charges may apply. Please contact Knauf Customer Services for more information.

Demountable Self-Supporting Ceilings

Knauf Corridor 400

Corridor 400 acoustic ceiling is a unique ceiling solution for narrow rooms and corridors. The gypsum ceiling with its distinct and unified look is installed without any cross runners or suspension hangers, on a self-supporting system with a flex runner. Therefore, a Corridor acoustic ceiling is extremely quick to install; up to 3 times faster installation than a traditional T-grid ceiling in a corridor. The acoustic ceiling planks are free spanning between the walls, and can span up to 2.4m.



PRODUCT DETAILS




EDGE D
Free-spanning tile with visible trim at short ends.
Non-perforated border around edge of tile.
Surface: white painted.

				
MICRO Square 3x3mm c/c 8.33mm	GLOBE Circle Ø6mm c/c 15mm	QUADRIL Square 12x12mm c/c 30mm	TANGENT Obround 4x14mm c/c 10/20mm	PLAIN

STANDARD PRODUCTS

Description	Edge	Design	Dimensions (mm)			Material No.	Ex Stock	Pack Details	
			Thickness	Width	Length			Items/ Pack	Weight (kg)
MICRO	M1	M1	9.5	400	1200	213300	✗	4	19
	M1	M1	9.5	400	1800	213302	✗	4	29
	M1	M1	9.5	400	2400	213304	✗	4	38
GLOBE	G1	G1	9.5	400	1200	213295	✗	4	19
	G1	G1	9.5	400	1800	213297	✗	4	29
	G1	G1	9.5	400	2400	213299	✗	4	38
QUADRIL	Q1	Q1	9.5	400	1200	213305	✗	4	19
	Q1	Q1	9.5	400	1800	213307	✗	4	29
	Q1	Q1	9.5	400	2400	213309	✗	4	38
TANGENT*	T1	T1	9.5	400	1200	213310	✗	4	19
	T1	T1	9.5	400	1800	213312	✗	4	29
	T1	T1	9.5	400	2400	213314	✗	4	38
PLAIN	P1	P1	9.5	400	1200	213290	✗	4	21
	P1	P1	9.5	400	1800	213292	✗	4	31
	P1	P1	9.5	400	2400	213294	✗	4	52

Material Pricing Group: QL

Compatibility	Description		Dimensions (mm)			Material No.	Ex Stock	Items / Pack
Corridor 400			Width	length	depth			
✓		Flexrunner	65	1200	44	198603	✗	4
✓			65	1800	44	198652	✗	4
✓			65	2400	44	198660	✗	4

[1] Material Pricing Group: QM, [2] Material Pricing Group: QN.

NB: Flexrunner must also be ordered to complete this system.

*Due to the bespoke manufacture of these high performance acoustic ceiling tiles, a start up fee may be applied.
Minimum order quantities and additional delivery charges may apply. Please contact Knauf Customer Services for more information.



Corridor 400

- Self-supporting ceiling
- Free span of up to 2.4 metres
- No suspension grid required, just a flex runner for rigidity
- Can be used in corridors over 2.4 meters*

* by using a T35 main runner




Build on us.

Non-Demountable Ceilings

Knauf Akustikpanel

Ceiling and wall lining offering a seamless and discreet look, with coherence between walls and ceilings. Possibility to create curved acoustic shapes on site or from the factory. No visible joints after finishing. Available in a squared 'quadril' perforation type with a choice of perforation layouts on the boards.


ONE SIZE OF QUADRIL PERFORATION (FOUR-SIDED TAPERED EDGE)

	4 Sided Tapered Tapered Edge on 4 sides Joints filled with Uniflott		QUADRIL Square 12x12mm c/c 30mm
---	--	---	---

Design	Edge	Dimensions (mm)			Material No.	Ex Stock	Fleece	Pallet Details		
Block Slot		Thickness	Width	Length			Colour	Boards	m²	Tonnes (approx.)
BQ8	TE	12.5	1200	2400	432055	✗	White	25	72	0.74
BQ8	TE	12.5	1200	2400	432102	✗	Black	25	72	0.74
BQ8	TE	12.5	1200	2400	432103	✗	Grey	25	72	0.74

Area of perforation: BQ7 = 10% BQ8 = 16% BQ9 = 10% BQ10 = 17%. Compliance: EN 14190. Material Pricing Group: Q2

The perforations are in the grey highlighted region of the board only



Special Conditions – All Knauf Akustikpanel FF and SK Edge components are subject to extended lead times. Please contact Customer Services for availability. **Full pallet quantities only.**



Knauf Solopanel

Continuous perforations to the edge offer a fluid, monolithic look, with coherence between walls and ceilings. Acoustic gypsum lining for both wall surfaces and ceilings, with no visible joints after finishing. Create your perfect aesthetic finish by choosing either the 1 or 2 perforation size options



ONE SIZE OF GLOBE PERFORATION (UFF EDGE)

												
UFF Edge		Joints filled with Uniflott.		G8/18 Circles Ø8mm c/c 18		G15/30 Circles Ø15mm c/c 30						
Design	Edge	Dimensions (mm)					Material No.	Ex Stock	Fleece	Pallet Details		
Globe		a	b	Thickness	Width	Length			Colour	Boards	m²	Tonnes (approx.)
G8/18	UFF	8	18	12.5	1188	1998	539622 ^{CF}	✗	White	25	59.4	0.63
G8/18	UFF	8	18	12.5	1188	1998	539622 ^{CF}	✗	Black	25	59.4	0.63
G15/30	UFF	15	30	12.5	1200	1980	621350 ^{CF}	✗	White	25	59.4	0.60
G15/30	UFF	15	30	12.5	1200	1980	621350 ^{CF}	✗	Black	25	59.4	0.60
Area of perforation: G6/18 = 8.7% G8/18 = 15.5% G10/23 = 14.8% G15/30 = 19.6%. Compliance: EN 14190. Material Pricing Group: Q2												
CF not available to order through EDI as product configuration is required. Please contact Knauf customer services to order.												

TWO SIZES OF GLOBE PERFORATION (UFF EDGE)

													
UFF Edge		Joints filled with Uniflott.		G8/12/50 Circles Ø8 and Ø12 mm c/c 50		G12/20/66 Circles Ø12 and Ø20 mm c/c 66							
Design	Edge	Dimensions (mm)						Material No.	Ex Stock	Fleece	Pallet Details		
Globe		a	b	c	Thickness	Width	Length			Colour	Boards	m²	Tonnes (approx.)
G8/12/50	UFF	8	12	50	12.5	1200	2000	612611	✗	White	25	60.0	0.66
G8/12/50	UFF	8	12	50	12.5	1200	2000	611754	✗	Black	25	60.0	0.66
G12/20/66	UFF	12	20	66	12.5	1188	1980	621357 ^{CF}	✗	White	25	58.9	0.60
G12/20/66	UFF	12	20	66	12.5	1188	1980	621357 ^{CF}	✗	Black	25	58.9	0.60
Area of perforation: G8/12/50 = 13.1% G12/20/66 = 19.6%. Compliance: EN 14190. Material Pricing Group: Q2													
CF not available to order through EDI as product configuration is required. Please contact Knauf customer services to order.													

ONE SIZE OF QUADRIL PERFORATION (UFF EDGE)


							UFF Edge Joints filled with Uniflott.						Q8/18 Squares 8x8 mm c/c 18				Q12/25 Squares 12x12 mm c/c 25	
Design	Edge	Dimensions (mm)					Material No.	Ex Stock	Fleece	Pallet Details								
Globe		a	b	Thickness	Width	Length			Colour	Boards	m²	Tonnes (approx.)						
Q8/18	UFF	8	18	12.5	1188	1998	539651 ^{CF}	✗	White	25	59.4	0.60						
Q8/18	UFF	8	18	12.5	1188	1998	539651 ^{CF}	✗	Black	25	59.4	0.60						
Q12/25	UFF	12	25	12.5	1200	2000	539661 ^{CF}	✗	White	25	60.0	0.60						
Q12/25	UFF	12	25	12.5	1200	2000	539661 ^{CF}	✗	Black	25	60.0	0.60						
Area of perforation: Q8/18 = 19.8% Q12/25 = 23%. Compliance: EN 14190. Material Pricing Group: Q2																		
CF not available to order through EDI as product configuration is required. Please contact Knauf customer services to order.																		

Special Conditions – All Knauf Solopanel components are subject to extended lead times.
Please contact Customer Services for availability. Full pallet quantities only.

Knauf Stratopanel

Continuous random perforation pattern offering a fluid, monolithic look. Seamless lining for wall and ceiling surfaces. Offering a unique aesthetic feature, while still offering high acoustic properties and the long lasting properties of gypsum.

RANDOM GLOBE PERFORATION (UFF EDGE)


								UFF Edge Joints filled with Uniflott.								G8/15/20 Various circles Ø 8/15/20 mm				G12/20/35 Various circles Ø 12/20/35 mm	
Design	Edge	Dimensions (mm)						Material No.	Ex Stock	Fleece	Pallet Details										
Globe		a	b	c	Thickness	Width	Length			Colour	Boards	m²	Tonnes (approx.)								
G8/15/20	UFF	8	15	20	12.5	1200	2000	539670 ^{CF}	✗	White	25	60.0	0.67								
G8/15/20	UFF	8	15	20	12.5	1200	2000	539670 ^{CF}	✗	Black	25	60.0	0.67								
G12/20/35	UFF	12	20	35	12.5	1200	2000	621359 ^{CF}	✗	White	25	56.3	0.64								
G12/20/35	UFF	12	20	35	12.5	1200	2000	621359 ^{CF}	✗	Black	25	56.3	0.64								
Compliance: EN 14190. Material Pricing Group: Q2																					
CF not available to order through EDI as product configuration is required. Please contact Knauf customer services to order.																					

*Due to the bespoke manufacture of these high performance acoustic ceiling tiles, a start up fee may be applied.
Minimum order quantities and additional delivery charges may apply. Please contact Knauf Customer Services for more information.

Knauf Contrapanel

Acoustic performance and impact resistance in one solution, with a distinct unified look. Rated Class 2A in accordance with EN 13964 – demonstrating it’s additional performance for impact resistance. No filling or painting required, and a time-saving installation in just a few steps. Foil covered surface – easy to clean. Ideal for high activity rooms such as gymnasiums and sports halls, due to its exceptional strength.

PRODUCT DETAILS



EDGE B
Bevelled edge.
Visible joints.
Surface: washable, white surface.



GLOBE
Circle
Ø6mm
c/c 15mm

The perforations are in the grey highlighted region of the board only



Description	Edge	Design	Dimensions (mm)			Material No.	Ex Stock	Loose on pallets
			Thickness	Width	Length			
GLOBE	B	G1F	12.5	600	1200	111878	✖	50
Compliance: EN 14190. Material Pricing Group: QL								

CONSUMPTION OF WHITE SCREWS FOR KNAUF CONTRAPANEL

Screws	Length mm	Material No.	Ex Stock	Nos. per pack	Description
Screw WS32T, white	32	198794	✖	100	For one layer gypsum on wood
Screw no. 408, white	42	199109	✖	100	For two layers gypsum on wood
Screw WS25S, white	25	219774	✖	100	For one layer gypsum on steel
Screw WS25S, white	25	219773	✖	1000	For one layer gypsum on steel
Screw WS38S, white	38	219780	✖	100	For two layers gypsum on steel
Compliance: EN 14566. Material Pricing Group: QN. Template for screw placement included in each pallet for size 600x1200 and size 600x1800mm.					

Panel size mm	For ceiling or walls Furring cc 300 mm	For walls Furring cc 200 mm
600 x 1200	16 each/board	20 each/board
600 x 1800	22 each/board	28 each/board
600 x 2400	28 each/board	36 each/board

Additional delivery charges may apply. Please contact Knauf Customer Services for more information.


Sound Absorbing Wall Panel

Knauf Adit

Instant acoustic wall panels, suitable as a DIY product, comes as a ready to install kit. Highly effective solution for improving acoustic performance in existing rooms. Exceptionally fast and easy installation. Easy cleaning and maintenance thanks to the foil-covered, robust surface. Fully customisable; Adit panels can be printed on.



PRODUCT DETAILS



EDGE B
Bevelled edge, visible joints. Non-perforated border around edge of board
Surface: laminated.



TANGENT
Obround
4x14mm
c/c 10/20mm

Description	Edge	Design	Dimensions (mm)			Material No.	Ex Stock	Pallet Details
			Thickness	Width	Length			
TANGENT	T1	B	9.5	450	2400	180369	✖	8
Compliance: EN 14190. Material Pricing Group: QL								

EACH KNAUF ADIT PACK CONTENTS:

- 2 pcs. Adit panels 450 x 2400mm
- 4 pcs. galvanised Z-profiles
- 8 pcs. 30mm Danopor
- 4 pcs. galvanised end closing profiles for Z-profiles
- 4 pcs. white varnished end profiles
- 4 pcs. hold down clips
- 4 pcs. hold down clips
- 2 pcs. mounting templates
- 1 pcs. mounting instruction




Knauf ADIT is also available with print of your own choice. Contact Knauf Customer Services for more information.



Non-Demountable Ceilings

– Accessories

	Description			Material No.	Ex Stock	Items /Pack
White painted screws for Knauf Contrapanel	For one layer gypsum on wood		32	198794	✗	100
	For one layer gypsum on steel		25	219774	✗	100
	For one layer gypsum on steel		25	219773	✗	1000
Material Pricing Group QN						

Special Conditions – All Knauf Acoustic and Design range components are subject to extended lead times. Please contact Customer Services for availability.

Suspension Systems Summary

Compatibility							Description		Dimensions (mm)			Material No.	Ex Stock	Items / Pack
Danotile	Contur 24	Belgravia 24	Belgravia 15	Plaza 15	Plaza 24	Corridor 400			Width	length	depth			
						↙	Donn Main Runner T35/38 3700mm White		35	3700	38	343273 ¹	✗	16
✓	✓	✓			✓		Donn Main Runner T24/38 3700mm White		24	3700	38	447854 ¹	✗	20
✓		✓			✓		Donn Cross Tee T24/38 1200mm White		24	600	38	788109	✗	40
✓		✓			✓		Donn Cross Tee T24/38 600mm White		24	1200	38	788110	✗	40
✓			✓	✓			Donn Main Runner T15/38 3700mm White		15	3700	32	825166 ¹	✗	20
✓			✓	✓			Donn Cross Tee T15/32 600mm White		15	600	32	826509	✗	40
✓			✓	✓			Donn Cross Tee T15/32 1200mm White		15	1200	32	827006 ¹	✗	40
✓	✓	✓	✓	✓	✓		Donn Perimeter L Trim L20/24 3000mm White		20	3000	24	434023 ¹	✗	40
						✓	Donn Perimeter L trim L20/40 3000mm White		20	3000	40	772542 ¹	✗	20
						✓	Donn Perimeter W Trim W20/20/20/20 3000mm White		20+ 20	3000	20+ 20	897470 ¹	✗	20
✓		✓	✓	✓	✓	✓	Donn Perimeter W Trim W15/15/8/25 3000mm White		15+ 15	3050	8+25	762907 ¹	✗	30
	✓						Spacer Bar 24x24 600mm			600		815395 ²	✗	50
	✓			✓	✓		Clip in Hanger 80mm				80	316304 ²	✗	100
	✓			✓	✓		Clip in Hanger 100mm				100	316302 ²	✗	100
✓	✓	✓	✓	✓	✓	✓	Quick hanger (The size specification indicates the min and max range)		100 – 300			469861 ²	✗	100
✓	✓	✓	✓	✓	✓	✓			300 – 600			469868 ²	✗	100
✓	✓	✓	✓	✓	✓	✓			600 – 1000			469872 ²	✗	100
✓	✓	✓	✓	✓	✓	✓			1000 – 1250			469876 ²	✗	100
✓	✓	✓	✓	✓	✓	✓			1250 – 1500			469878 ²	✗	100
						✓	Flexrunner		65	1200	44	198603 ²	✗	4
						✓			65	1800	44	198652 ²	✗	4
						✓			65	2400	44	198660 ²	✗	4
[1] Material Pricing Group: QM. [2] Material Pricing Group: QN.														

Painting Service

Painting method: Spray painted

Quality: Surface covered only – little/no paint in perforation holes.

Application: Can be applied on all perforations. We recommend this for light colours ONLY*

Painting method: Immersed

Maximum size 625x1250

Quality: Fully painted / the panel is dipped and the perforation holes are coloured.

Application: Can be applied on all perforations. Available for all colours.

Untreated products painted standard white (NCS 0701 Y24R as RAL 9003)

Quality: Fully painted / the panel is dipped and the perforation holes are coloured.

Application: Can be applied on all perforations. Available for all colours.

Prices available on request.

Please contact cservice@knauf.com to enquire and include the RAL or NCS colour reference.

* We define light colours as the following:

RAL: 1013, 1014, 1015, 7035, 7047, 9001, 9002, 9010, 9016, 9018

NCS: If the first 2 digits are less than or equal to 10 and the second 2 digits are less than or equal to 10 (e.g. S0510-Y, S0505-B20G, S1010-R60B) **OR** If the last 2 digits = 00, then the first 2 digits may be up to 15 (e.g. S1500 N)





9 **AQUAPANEL®**

Knauf AQUAPANEL® is a range of cement boards, specifically designed to be resistant to water damage. They can be used as render carriers on external walls and soffits, as tile backers for internal walls and floors in wet areas and as rooftop boards. A comprehensive range of jointing and finishing accessory products complete these fully warranted systems.

AQUAPANEL® Cement Boards

Knauf AQUAPANEL® interior cement boards allows high-performance indoor constructions even in the most challenging wet and humid conditions. Knauf AQUAPANEL® boards will not deteriorate in water and offer very high impact resistance.

Knauf AQUAPANEL® Cement Board Indoor

Designed to be used as a high-performance tile backing board and is also ideal as a general building board. This is a tough, impact-resistant glass-fibre-reinforced cement tile backer for use in wet and humid areas. At 11kg/m² the board is lighter than many cement boards, making installation easier and quicker. A bending radius of 1m can be achieved without the need to cut the board into strips.



Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
12.5	900	1200	519734	✓	55	59.4	0.65
12.5	900	2400	508257	✓	55	118.8	1.30
12.5	1200	2400	519708	✓	55	158.4	1.74
Compliance: ETA-07/0173. Material Pricing Group: Q1					Note: 2400mm long boards are recommended for use in commercial applications.		

Knauf AQUAPANEL® Cement Board Floor Tile Underlay

Ideal for refurbishment projects where a tiled floor is desired. This board is made from Portland cement and has a coated fibre mesh embedded in the core. It is an ideal solution for refurbishments where a tiled floor is required and at only 6mm thick, room height is not compromised. It will not rot or warp.



Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
6	900	1200	240211	✓	50	54.0	0.46
Material Pricing Group: Q1							

Knauf AQUAPANEL® Cement Board SkyLite

Offers a lightweight solution for both interior and exterior ceilings and soffits. This is a lightweight 8mm cement board suitable for interior ceilings in wet and humid areas as well as some exterior soffits dependent on specification. Contact Knauf for exterior specification. See **p 94-95** for associated coated metal components for the substructure of Knauf AQUAPANEL® Interior and Exterior Ceiling Systems.



Dimensions (mm)			Material No.	Ex Stock	Pallet Details		
Thickness	Width	Length			Boards	m²	Tonnes (Approx.)
8	900	1200	433850	✓	80	86.4	0.90
Compliance: ETA-13/0608. Material Pricing Group: Q1							

AQUAPANEL® Fixings

Knauf AQUAPANEL® Maxi Screws (SN)

Corrosion-protected screws for fixing Knauf AQUAPANEL® to light gauge steel profiles (up to 0.7mm) as part of Knauf AQUAPANEL® Interior and Exterior systems. They have a needle point and countersunk heads. The 39 and 55 variants can also be used for timber frame.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Diameter			Items per Carton	kg (Approx.)
25	4.2	87319	✓	1000	1.8
39	4.2	87283	✗	100	0.39
39	4.2	53500	✓	500	2.0
55	4.2	95644	✓	250	2.0
Compliance: EN 14566. Material Pricing Group: Q1					

Knauf AQUAPANEL® Maxi Screws (SN) Collated

Collated 39mm screws. Each pack has 10 belts with 100 screws per belt. Corrosion-protected screws for fixing Knauf AQUAPANEL® to timber frames and light gauge steel profiles (up to 0.7mm) as part of Knauf AQUAPANEL® Interior and Exterior systems. They have a needle point and countersunk heads.



Dimensions (mm)		Material No.	Ex Stock	Pack Details	
Length	Diameter			Items per Carton	kg (Approx.)
39	4.2	87317	✗	1000	3.0
Compliance: EN 14566. Material Pricing Group: Q1					

AQUAPANEL® Accessories

Knauf AQUAPANEL® accessories are used in conjunction with the Knauf AQUAPANEL® Cement Boards to create high quality and economical systems for use on the exterior and interior of any building.

Knauf AQUAPANEL® Joint Adhesive

This is a joint adhesive used for wall applications to bond individual AQUAPANEL® Indoor boards prior to applying a tiled finish.



Cartridge Size	Material No.	Ex Stock	Carton Details	
ml			cartridges per pack	kg (Approx.)
290	842864	✓	20	1.14kg
Estimating Guide: 50ml/m². Material Pricing Group: Q1				

Knauf AQUAPANEL® Tape

This is a 100mm wide glass fibre tape with an alkaline-resistant coating. It is embedded into Knauf AQUAPANEL® Joint Filler – Grey, AQUAPANEL® Joint Filler and Skim Coat – White, or tile adhesive, to reinforce joints as part of a Knauf AQUAPANEL® Exterior or Interior system.



Roll Size		Material No.	Ex Stock	Carton Details	
Length (m)	Width (mm)			Rolls per Carton	kg (Approx.)
50	100	429471	✓	12	4
20	100	465546	✓	18	5.3
Estimating Guide: 2.1m/m². Material Pricing Group: Q1					

Knauf AQUAPANEL® Reinforcing Mesh

This is a 1m wide, alkaline-resistant glass fabric mesh designed for complete cover reinforcement of Knauf AQUAPANEL® Exterior Basecoat as part of the Knauf AQUAPANEL® Exterior system, or for use internally with Knauf AQUAPANEL® Joint Filler and Skim Coat – White.



Roll Size		Material No.	Ex Stock	Pallet Details	
Length (m)	Width (mm)			Rolls per Pallet	kg (Approx.)
50	1	770764	✗	33	375
Estimating Guide: 1.1m/m². Material Pricing Group: Q1. Available in part pallet quantities.					

Knauf AQUAPANEL® Board Primer

Pre-mixed synthetic dispersion for priming Knauf AQUAPANEL® Cement Board Indoor after jointing and filling.



Tub Size	Material No.	Ex Stock	Pallet Details	
kg			Tubs	Tonnes (Approx.)
15	49279	✗	24	0.36
Shelf life: 18 months. Estimating Guide: Coverage 40–60g/m², 1:2 dilution ratio with water. Material Pricing Group: Q1. Available in part pallet quantities.				

Knauf AQUAPANEL® Joint Filler and Skim Coating – White

This powdered compound is for use with Knauf AQUAPANEL® Cement Board Indoor as either a skim coat or joint filler. When using as a skim coat Knauf AQUAPANEL® Reinforcing Mesh must be embedded.



Bag Size	Material No.	Ex Stock	Pallet Details	
kg			Bags	Tonnes (Approx.)
20	131095	✓	48	0.96
Shelf life: 12 months. Estimating Guide: 4.2kg/m² for full surface skim. Compliance: EN 998. Material Pricing Group: Q1. Available in part pallet quantities.				

Knauf Interior Skim

Ready-mixed water-resistant skim coat for use over Knauf AQUAPANEL® Interior and Knauf AQUAPANEL® Ceiling systems to create a smooth and level finished surface, ready for painting.



Bag Size	Material No.	Ex Stock	Pallet Details	
kg			Bags	Tonnes (Approx.)
25	258278	✗	40	1.0
Shelf life: 9 months. Estimating Guide: Coverage 18m² per bag at 0.8 mm thickness. Material Pricing Group: Q1. Available in part pallet quantities.				

Coated Metal

Forming part of the Aquapanel interior ceiling system these C3 and C5 corrosion resistant profiles are ideal for use in wet areas, from swimming pools and spas through to bathrooms, wet rooms and communal showers. Used as part of a complete AQUAPANEL® Ceiling System that provides protection against moisture and mold for projects exposed to humidity and chemicals, such as chlorine.

Knauf Coated 'C' Channel

Coated steel section for use as support channel for Knauf AQUAPANEL® Ceiling system.

Coating	Dimensions (mm)				Material No.	Ex Stock	Pack Details	
	Gauge	Size/webb	Length	Flange			Items/Pack	kg (Approx.)
C3	0.60	60	4000	27	57983	✖	12	27
C3	0.60	60	cut to order	27	322198 ^{CF}	✖	12	–
C5	0.60	60	4000	27	322196	✖	12	27
C5	0.60	60	cut to order	27	322197 ^{CF}	✖	12	–

Compliance: EN 13964:2014. Material Pricing Group: PG
'CF' not available to order through EDI as product configuration is required. Please contact Knauf customer services to order.

Knauf Coated 'U' Channel

Coated steel section for use as perimeter channel in Knauf AQUAPANEL® Ceiling system.

Coating	Dimensions (mm)				Material No.	Ex Stock	Pack Details	
	Gauge	Size/webb	Length	Flange			Items/Pack	kg (Approx.)
C3	0.60	28	3000	27	59877	✖	16	18
C5	0.60	28	3000	27	322228	✖	16	18

Compliance: EN 13964:2014. Material Pricing Group: PG

Knauf Coated 'C' Channel Intersection Connector

Connects primary and secondary channels in the Knauf AQUAPANEL® Ceiling system.

Coating	Material No.	Ex Stock	Pack Details		
			Items/Pack	Colour	kg (Approx.)
C3	824269	✖	50	Silver	2
C5	322206	✖	50	Black	2

Compliance: EN 13964:2014. Material Pricing Group: PO

Knauf Coated 'C' Channel Connector

Connects base and support profiles in the Knauf AQUAPANEL® Ceiling system.

Coating	Material No.	Ex Stock	Pack Details		
			Items/Pack	Colour	kg (Approx.)
C3	824270	✖	50	Silver	2.3
C5	324008	✖	50	Black	2.3

Compliance: EN 13964:2014. Material Pricing Group: PO

Knauf Coated 'U' Mounting Bracket

Locates Knauf 'C' Channel to background support.

Coating	Dimensions (mm)			Material No.	Ex Stock	Pack Details		
	Size/webb	Length	Flange			Items/Pack	Colour	kg (Approx.)
C3	60	120	27	824268	✖	50	Silver	3
C3	60	200	27	323977	✖	50	Silver	4
C5	60	120	27	322018	✖	50	Black	3
C5	60	200	27	323996	✖	50	Black	4

Compliance: EN 13964:2014. Material Pricing Group: PO

Knauf Coated Nonius Top

Coated suspending brackets for use in Knauf AQUAPANEL® Ceiling system.

Coating	Max. Void Depth*	Material No.	Ex Stock	Pack Details	
	mm			Items/Pack	kg (Approx.)
C3	200	785365	✖	50	1.7
C3	300	785369	✖	50	2.5
C3	400	785368	✖	50	3.3
C3	500	787799	✖	50	4.2
C3	600	785367	✖	50	4.9
C3	700	785370	✖	50	5.8
C3	800	785408	✖	50	6.8
C3	900	785410	✖	50	7.8
C3	1000	785412	✖	50	8.7
C3	1200	785413	✖	50	10.5
C3	1500	785414	✖	50	13.1
C3	1800	785415	✖	50	15.0
C5	200	785711	✖	50	1.7
C5	300	785886	✖	50	2.5
C5	400	785885	✖	50	3.3
C5	500	785343	✖	50	4.2
C5	600	785887	✖	50	4.9
C5	700	785888	✖	50	5.8
C5	800	785889	✖	50	6.8
C5	900	785890	✖	50	7.8
C5	1000	785695	✖	50	8.7
C5	1200	785696	✖	50	10.5
C5	1500	785891	✖	50	13.1
C5	1800	785892	✖	50	15.0

Compliance: EN 13964:2014. Material Pricing Group: PO

* Maximum void achievable when used in conjunction with Knauf Coated Nonius Hangers and Knauf Nonius Clips.

Knauf Coated Nonius Hanger

Coated suspending brackets for use in Knauf AQUAPANEL® Ceiling system.



Coating	Dimensions (mm)	Material No.	Ex Stock	Pack Details		
	Length			Items/Pack	Colour	kg (Approx.)
C3	100	824263	✗	50	Silver	2
C5	100	322195	✗	50	Black	2

Compliance: EN 13964:2014. Material Pricing Group: PO

Knauf Nonius Clip

Clip for use in combination with the Knauf Coated Nonius Top for adjustment of ceiling heights. Any scratches on the coated clips must be coated with Corrosion Resistant Paint when installed. The non-coated clips must be fully coated with Corrosion Resistant Paint when installed.



Coating	Material No.	Ex Stock	Pack Details	
			Items/Pack	kg (Approx.)
C3	591247	✗	100	0.7
C5	591249	✗	100	0.7

Compliance: EN 13964:2014. Material Pricing Group: PO

Knauf Coated Metal Hanger to Profile Screw LN 3.9 11

Secure Knauf Coated Nonius Hanger to Knauf Coated 'C' Channel. Screws must be fully coated with Corrosion Resistant Paint when installed.





Material No.	Ex Stock	Pack Details	
		Items/Pack	kg (Approx.)
46175	✗	1000	1.37


Compliance: EN 13964:2014. Material Pricing Group: PO

Note: For delivery lead times for Coated Metal, please contact Knauf Customer Services.

Selecting the correct components for your coated metal ceiling

We've recently changed how we measure the Knauf Coated Nonius Top to make it easier to understand which product you need to order. The column labelled maximum void depth is the new measurement used to calculate the components needs. This reflects the maximum void depth as shown in the image below of the metal frame assembly, considering all products used. Simply use this measurement to select the appropriate Knauf Nonius Top.

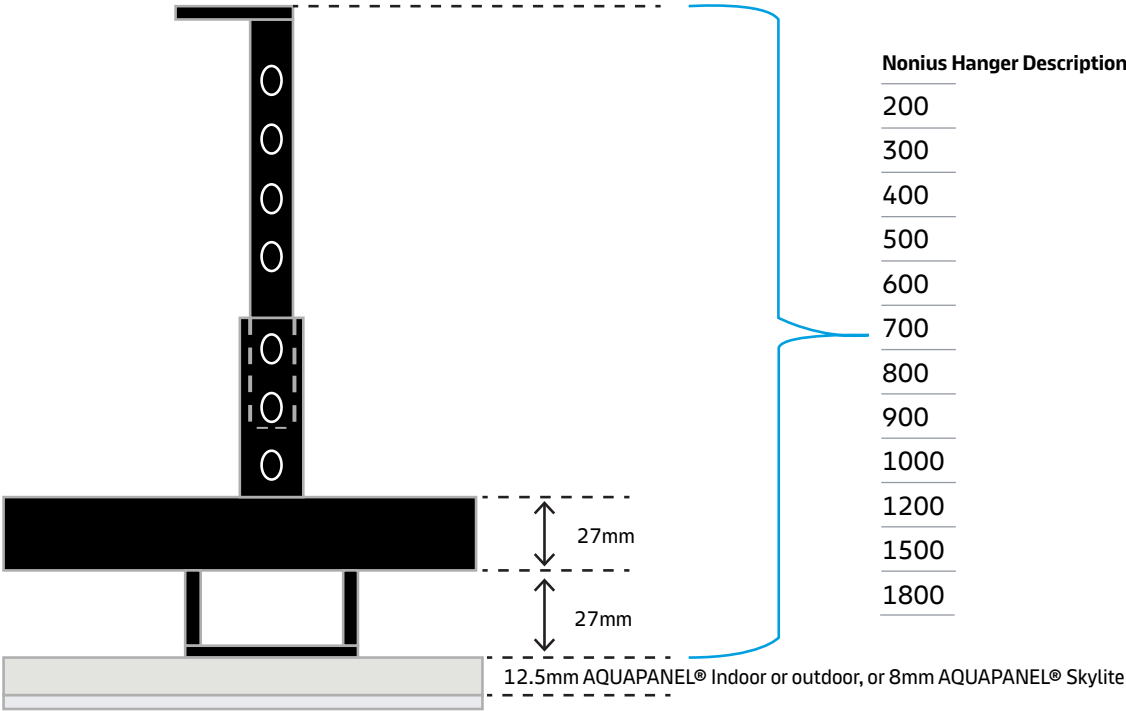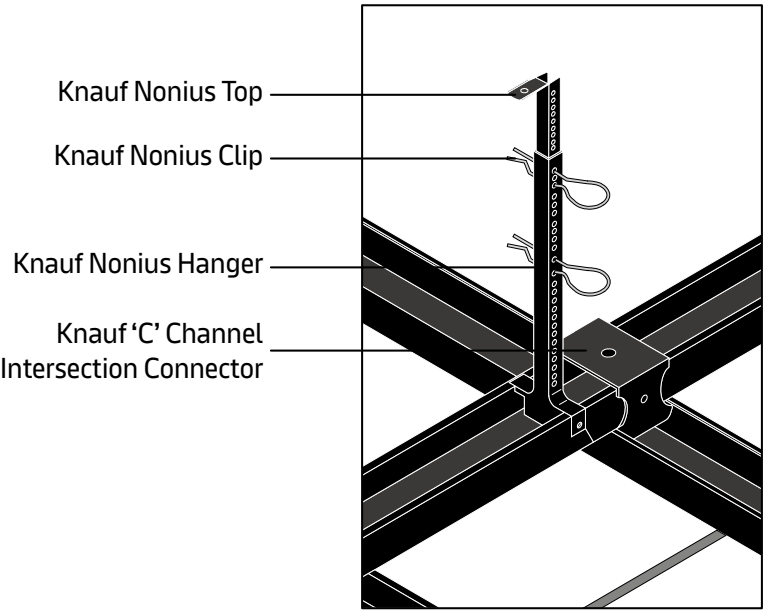

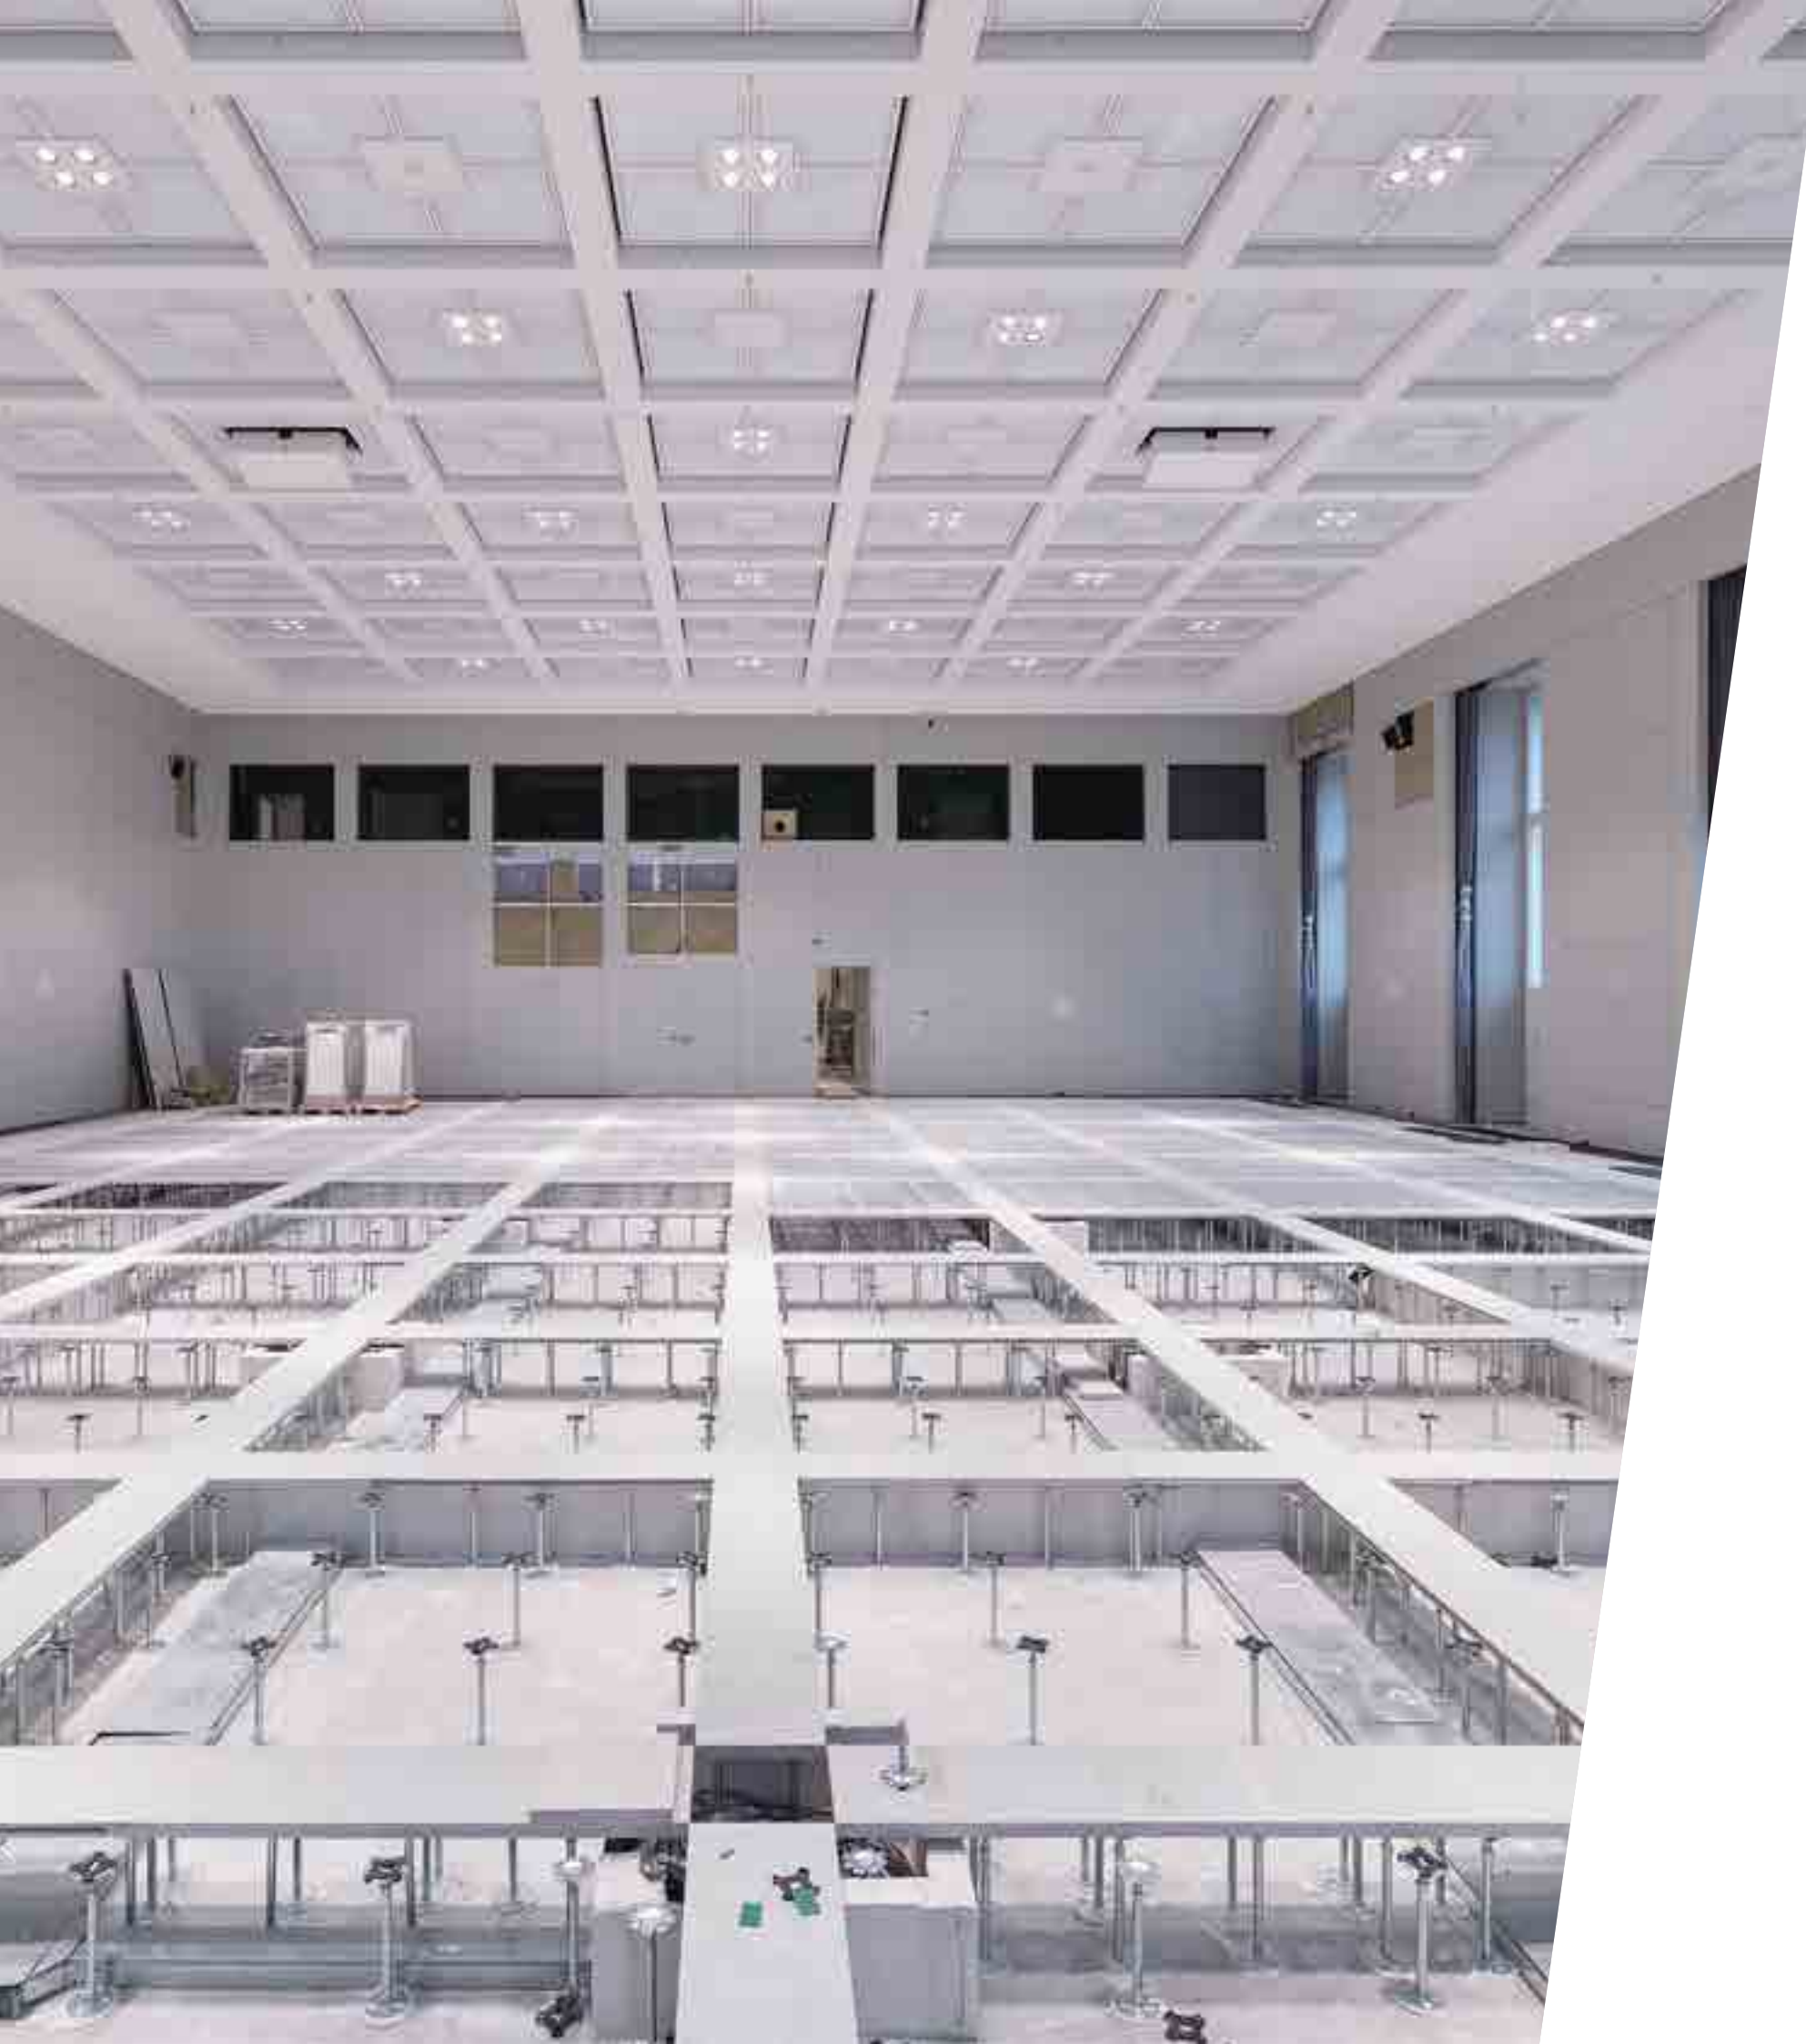

10 FLOORING PANELS

Our comprehensive range of dry floor screed panels offers a solution for almost any floor, including raised hollow applications. Knauf industry-leading specialist flooring systems are easier to install than conventional wet screed due to them not needing time to dry.

Dry Screed Floor Panels

Knauf dry screed panels are high quality interlocking flooring systems using gypsum fibreboard technology. The systems are installed and ready for traffic in a fraction of the time of traditional wet screeds. Knauf dry screed panels are light whilst still providing a tough impact resistant surface. With thermal conductivity ratings of 0.35 (W/mK) for Gifa FHB, and 0.28 (W/mK) for Brio and Hugo, Knauf dry screed floor boards are ideal for underfloor heating systems.

Knauf Low Density Floor Panels

Low density boards provide an economical solution that is quick and easy to install where heavy loading or brittle flooring finishes are not being applied.

	Dimensions (mm)			Edge Profile	Density	Material No.	Ex Stock	Pallet Details		
	Total Thickness	Width	Length					Boards	m²	Tonnes (Approx.)
Brio 18	18	600	1200	Lapped	1100-1200	82667	✓	70	50.4	1.19
HUGO 18	18	600	1200	T&G1	1100-1200	550815	✓	50	36.0	0.81
HUGO 23	23	600	1200	T&G1	1100-1200	602387	✗	35	28.8	0.72
Brio 23	23	600	1200	Lapped	1100-1200	82670	✓	50	36.0	1.10

Compliance: EN 15283-2. Material Pricing Groups: Q3 for Lapped, Q4 for T&G1. Single pallet delivery options available on request.

 See pages 106-107 for our range of flooring accessories

Knauf High Density Floor Panels (GIFA)

Structural boards able to span between joists and provide the perfect stable base for brittle or heavy flooring finishes in high loading application areas.

	Dimensions (mm)			Edge Profile	Density	Material No.	Ex Stock	Pallet Details		
	Total Thickness	Width	Length					Boards	m²	Tonnes (Approx.)
FHB 18	18	600	1200	T&G	1500-1600	453665	✓	50	36.0	1.06
FHB 25	25	600	1200	T&G	1500-1600	31256	✓	35	25.2	1.04
FHB 28	28	600	1200	T&G	1500-1600	31545	✗	30	21.6	1.00
FHB 32	32	600	600	T&G	1500-1600	31559	✗	50	18	0.95
FHB 32	32	600	1200	T&G	1500-1600	31326	✓	25	18	0.95
FHB 38	38	600	600	T&G	1500-1600	88636	✗	40	14.4	0.91
FHB 38	38	600	1200	T&G	1500-1600	88635	✓	20	14.4	0.91

Compliance: EN 15283-2. Material Pricing Groups: Q4 for T&G. Single pallet delivery options available on request.

Edge Profile		
		
HUGO T&G1	Brio Lapped	GIFA FHB T&G

WHY USE KNAUF DRY SCREED FLOORING?



- ✓ Very low water on site.
- ✓ **No** disposing of contaminated water.
- ✓ **No** pumping equipment.
- ✓ Reduced substructures/foundations.
- ✓ Easy to install
- ✓ Lightweight and thin, yet robust.
- ✓ Ideal for underfloor heating systems.*
- ✓ Trafficable after 24 hours.

Amount of water required on site per m² sand/cement screed:
11L for **75mm** sand/cement
60L for **40mm** liquid screed approx.

SCAN THE QR CODE
TO WATCH OUR VIDEO ABOUT
THE BENEFITS OF
OUR DRY SCREED RANGE



*With thermal conductivity ratings of 0.35 (W/mK) for Gifa FHB, and 0.28 (W/mK) for Brio and Hugo, Knauf dry screed floor boards are ideal for underfloor heating systems.

Acoustic Panels

Knauf Acoustic Dry Screed Panels

Knauf dry screed panels backed with wood-fibre to provide enhanced acoustic performance and excellent impact sound reduction.

	Dimensions (mm)			Edge Profile	Density	Material No.	Ex Stock	Pallet Details		
	Total Thickness	Width	Length		kg/m³			Boards	m²	Tonnes (Approx.)
Brio 18 WF	28	600	1200	Lapped	1100-1200	82669	✓	50	36	0.97
Brio 23 WF	33	600	1200	Lapped	1100-1200	82671	✓	40	28.8	0.97
Compliance: EN 15283-2. Material Pricing Groups: Q3 for Lapped, Q4 for T&G and T&G1. Single pallet delivery options available on request. Density excludes WF layer.										

Knauf Acoustic Resilient Panel

Knauf Acoustic Resilient Panel is a 250kg/m³ wood fibre with a square edge. Ideal for use in either single or double layers under Knauf flooring panels to improve impact sound insulation.



Dimensions (mm)			Edge Profile	Density	Material No.	Ex Stock	Pallet Details		
Total Thickness	Width	Length		kg/m³			Boards	m²	Tonnes (Approx.)
10	600	1200	Square	250	205256	✗	226	162.8	0.42
Compliance: EN 13986. Material Pricing Group: Q3									



11 FLOORING ACCESSORIES

Knauf has a range of accessories manufactured and designed to maximise the performance of the flooring system.

Dry Screed Floor Accessories

Knauf Brio Screws

Knauf Brio Screws are used to firmly hold Knauf Brio or Knauf Brio WF Panels together to ensure the adhesive bonds effectively. Always use the correct length to avoid damage to the underfloor and pipes.



	Dimensions (mm)		Material No.	Ex Stock	Pack Details	
	Length	Diameter			Items/Pack	kg (Approx.)
Brio 18 Screws	17	4.2	708526	✓	500	0.7
Brio 23 Screws	22	4.2	708531	✓	500	0.9

Material Pricing Group: Q3. Estimating Guide: 1m² per 10 screws. 50m² per pack of 500 screws.

Knauf Flooring Edge Strips

Knauf Flooring Edge Strip is a mineral wool perimeter strip for use with Knauf Brio and Knauf GIFAfloor systems.



Dimensions (mm)			Material No.	Ex Stock	Pack Details	
Length	Height	Width			Items/Pack	kg (Approx.)
1200	100	12	450687	✓	50	6.6
1200	100	12	108502	✓	100	13.2

Material Pricing Group: Q3. Estimating Guide: 1.1m per m² of floor.

Knauf Schnellgrund Floor Primer

Knauf Schnellgrund Floor Primer is a quick-drying primer to be applied to all Knauf flooring panels ready for surface finishing. Knauf Schnellgrund Floor Primer can also be used as a primer and dust proofer prior to sticking pedestals to the substrate.



Tub Size	Material No.	Ex Stock	Pack Details	
kg			Tubs	Tonnes (Approx.)
5	448267	✗	60	0.3

Material Pricing Group: Q3. Estimated Coverage: 62.5m² per 5kg tub, when used on Knauf Brio and Knauf GIFAfloor. Available in part pallet quantities.

Knauf Uniflott

Knauf Uniflott can be used as a joint and surface filler for Knauf Brio and Knauf GIFAfloor.



Bag Size	Material No.	Ex Stock	Pack Details	
kg			Bags	Tonnes (Approx.)
25	253631	✓	42	1.05

Shelf life: 9 months. Compliance EN 13963, Type 4B. Available in part pallet quantities. Material Pricing Group: PB

Knauf GIFAbond Duo

Knauf GIFAbond Duo is spread using a 4mm notched trowel over Knauf FHB to receive further Knauf FHB panels. Use in conjunction with GIFAbond Blue on two-layer systems. EMICODE® EC1 rated for very low emissions.



Tub Size	Material No.	Ex Stock	Pack Details	
kg			Item/Pack	kg (Approx.)
15	741704	✗	1	15

Material Pricing group Q4. Estimated coverage: approx 21m² per tub. 12 month shelf life

Knauf GIFAbond Blue (Single Layer Joint Adhesive)

Knauf GIFAbond Blue is a flooring joint adhesive, supplied in a bottle for easy application by hand to the tongue and groove edge. For use on Knauf GIFA, Hugo, and Brio flooring boards. EMICODE® EC1 Plus rated for very low emissions.




Bottle Size	Material No.	Ex Stock	Pack Details	
ml			Items/Pack	kg (Approx.)
1200	676976	✓	6	7.2

Material Pricing Group: Q4. Estimated Coverage: 23m² per bottle for 600 x 1200 panels. 12 month shelf life.

Knauf GIFAfloor Acoustic Isolating Strip

Knauf GIFAfloor Acoustic Isolating Strip, 60mm x 3mm x 20m, is for Knauf LBS systems.




Dimensions (mm)			Material No.	Ex Stock	Pack Details	
Thickness	Width	Length (m)			Items/Pack	kg (Approx.)
3	60	20	91287	✗	5	2.9

Material Pricing Group: Q4

Knauf Resilient Isolation Strip

A purpose made self-adhesive strip which isolates the floor deck from the top of the joist in acoustic floor systems allowing improved acoustic performance.



Dimensions (mm)			Material No.	Ex Stock	Pack Details	
Thickness	Width	Length (m)			Items/Pack	kg (Approx.)
12	50	5	258303	✓	9	6

Material Pricing Group: PO




12 GIFA FLOOR ACCESS SYSTEMS

Knauf offers a wide range of products which combine to create floor access solutions for a range of floor finishes and applications.

Access Frame Systems

All access frame systems accept 600mm x 600mm access panels, plus all frames and profiles have an adjustable floor finish protective edge.

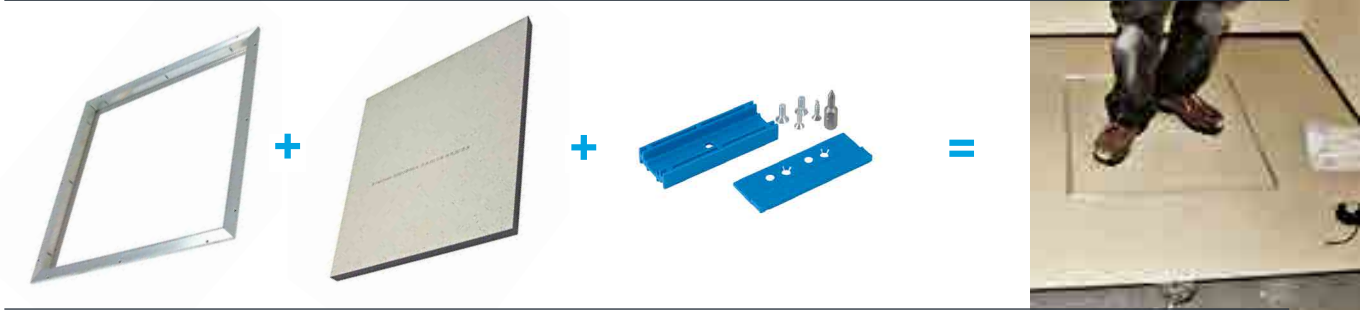

Knauf GIFAfloor Access Panel

Knauf GIFAfloor Access Panel is a 1500kg/m³ gypsum fibreboard, with an engineered chamfered edge and plastic protective strip.

	Dimensions (mm)			Material No.	Ex Stock	Pack Details	
	Thickness	Width	Length			m²	kg (Approx)
R34	34	600	600	518872	✖	0.36	19.7
R42	42	600	600	518875	✖	0.36	24.4

Material Pricing Group: Q4

Knauf GIFAframe

Knauf aluminium access frames provide access points for single layer FHB25 using access panel Knauf R34.

	Dimensions (mm)			Material No.	Ex Stock	Pack Details	
	To accept	Width	Length			Items/Pack	kg (Approx)
AF6 25/34	R34	600	600	30080	✖	1	1.9

Material Pricing Group: Q4

Knauf GIFAframe Universal for Single Layer

Knauf aluminium access frames provide access points for Knauf FHB28, FHB32 and FHB38 using access panels Knauf R42.

	Dimensions (mm)			Material No.	Ex Stock	Pack Details	
	To accept	Width	Length			Items/Pack	kg (Approx)
UAF6 38/42	R42	600	600	139306	✖	1	2.5

Material Pricing Group: Q4

Knauf GIFAframe Installation Pack

Knauf installation packs contain: 12 adjustable packers to suit different FHB floor height. The pack contains 12 adjustable packers for the access panel to sit on, plus M4 screws to fix the packers in place.

	Material No.	Ex Stock	Pack Details	
			Items/Pack	kg (Approx.)
Installation pack FHB 28/32	139307	✖	12	0.2

Material Pricing Group: Q4.

Access Frame Components

Knauf GIFAfloor Access Frame Components allow for construction of multi-panel runs of access panels and for bespoke access panels.

Knauf GIFAframe Profile Accessories

Knauf aluminium access frame jointing plates for 25mm systems.

	Material No.	Ex Stock	Pack Details
			Items/Pack
Straight Jointing Plate	77807	✖	1
90° Jointing Plate	77808	✖	1

Material Pricing Group: Q4





13 APPENDIX

Use our quick index to find the product you need,
and also read our terms and conditions in full.
Thank you for your business.

index

A		C	
Acoustic 'C' Studs	28	'C' Channel	32, 51
Acoustic and Design	70-89	'C' Channel Connector	32
Access Frame Systems	112	'C' Studs	28
Acoustic Dry Screed Panels	103-104	CD Ceiling and Wall Liner	38-39
Acoustic Panels	104	CD 'U' Mounting Bracket	38
Acoustic Resilient Panel	104	Ceiling and Wall Lining	32-33
Adhesives	24, 109	Channel Intersection Connector	32
Adit	85	Coated Metal	96-98
Airless Finish	66	Collated Drywall Screws	44
Akustikpanel	81	Contrapanel	84
Angle Sections	40, 51	Contur S24	77
AQUAPANEL® Cement Board SkyLite	92	Core Board	19
AQUAPANEL®	94-95	Core Board Channel	31
AQUAPANEL® Cement Board Indoor	92	Corner Beads	61
AQUAPANEL® Accessories	94-95	Corner Flex Tape	60
AQUAPANEL® Cement Board Floor Tile Underlay	92	Corridor 400	79
AQUAPANEL® Fixings	93	Corrosion Resistant Paint	98
B		Cove	24
Baseboard	15	Cove Adhesive	24
Beads	50-51	'C-T' Stud	31
Belgravia S15	74	D	
Belgravia S24	73	Danotile	78
Betokontakt	69	Deep Flange 'U' Channel	31
Blackstar Screws	98	Dry Screed Floor Panels	103-104
Bonding Compound (Plasterboard Adhesive)	24	Dry Screed Floor Accessories	108-109
Brio	103-104	Demountable Ceilings - T-grid	73-78
Brio Screws	108	Drywall Angle Bead	61
		Drywall Edge Bead	62
		Drywall Screws	44-46
E		E	
		Easy Plaster	68
		Edge Beads	62
		Edge Strips	108
		Extra Deep Flange 'U' Channel	31

F		I	
FHB	102-104	'I' Stud	29
Fibre Tape	60	Isolation Strip	109
Fill & Finish	58	Insulating Laminates	23
Fill & Finish 30 Premium	56	Internal Bead	61
Fill & Finish 60 Premium	56	Intumescent and Acoustic Mastic	52
Fill & Finish Light	58	J	
Finishing Solutions	64-69	'J' Channel	31
Fireboard	21, 50	Jackpoint Screws	44
Fireboard Spachlet (joint filler)	50	Joint Adhesive - GIFA	109
Fire Encasement	50-51	Joint Cement Premium	56
Fire Panel	16	Joint Filler (Uniflott)	57
Fixings and Accessories	44-46	Joint Filler Premium	56
Fixing Channel	40	Jointing	54-59
Fixing Clip	40, 41	Jointing Corner Beads	61
Flexible Metal Tape	62	Jointing Edge Beads	62
Flooring Accessories	107-109	Jointing Products and Accessories	54-63
Flooring Edge Strips	108	L	
Flooring Panels	103-104	Low Density Floor Panels	103-104
G		M	
GIFA FHB	103-104	Metal Sections	26-40
GIFAbond Blue (Single Layer Joint Adhesive)	109	Metal Accessories	40
GIFAfloor Access Systems	112-113	MF Ceiling Channel	36
GIFAfloor Acoustic Isolating Strip	109	MF Connecting Clip	36
GIFAFrame	112	MF Nut and Bolt	37
GIFAFrame Access Panel	112	MF Perimeter Channel	36
GIFAFrame Profile Accessories	113	MF Primary Support Channel	37
GIFAFrame Universal for Single Layer	112	Moisture Panel	18
Glass Fibre Tape	50, 60	'MW' Stud	29
H		N	
High Performance Boards	16-23	Non-Demountable Ceilings	81-84
		Non-Demountable Ceiling Accessories	86
		Nonius Hangers	98

P		T	
Painting Service	88	Technical Services	8
Passive Fire Protection Range	48-52	Thermal Laminate	23
Performance Plus	19	Training Services	9
Performance Plus Screws	45	U	
Plank	15	'U' Channel	31
Plasterboard Accessories	24	'U' Channel Perimeter Support	35
Plasterboard Adhesive (Bonding Compound)	24	UKCA Marking	6
Plasterboard Sealer	24	Uniflott	57, 108
Plasterboards	12-23	Uniflott Applicator	57
Plaza S15 & S24	75-76	Universal Bracket	33
Powdered Jointing	56-57	'UW' Channel	32
Primer	108	V	
ProRoll Light	68	Vapour Panel	16
ProRoll Max	68	Vidiwall	23
Putty Pads	52	Vidiwall Screws	46
R		W	
Ready-mixed Jointing	58	Wafer Head Screws	46
Ready-mixed Finishes	66	Wafer Head Self Tapping	46
Resilient Isolation Strip	109	Wallboard	14
Resilient Bar	30	Wallboard Primer	24
S		Wood Screws	45
Safeboard	21	X	
Safeboard Joint Filler	60	XPS Laminate Plus	23
Schnellgrund Floor Primer	108		
Screws	42-46		
Self-Supporting Ceilings	79		
Self Tapping Screws	44-46		
Shaftwall	32		
SkyLite	92		
Soffit Cleat	35		
Solopanel	82		
Sound Absorbing Wall Panel – Knauf Adit	85		
Soundshield Plus	17		
Sound Panel	17		
Staggered Stud Clips	29		
Standard Boards	14-15		
Strap Hanger	97		
Stratopanel	83		
Suspension Systems Summary	87		

The 100% Knauf System Performance Warranty

Knauf warrants that its Systems will perform to the specified requirements throughout the lifetime of the building, when installed properly and under normal conditions.

Substantiated System Solutions

Knauf provides a comprehensive range of interior and exterior solutions, systems, and products, robustly tested to provide complete peace of mind for its customers. Systems have been developed and designed as complete building solutions to meet required specified performances. The systems and components are tested by accredited testing facilities in accordance with recognised industry standards and regulations.

The 100% Knauf System Performance Warranty guarantees that your Knauf systems are:

- Manufactured from the highest quality raw materials in state-of-the-art factories. Products comply with UK and/or EU standards and are subject to rigorous quality assurance procedures.
- System testing conducted at UKAS accredited laboratories or equivalent recognised (under ILAC MRA) European testing facilities for fire resistance and acoustic sound insulation testing with continuous factory production control testing to review and maintain published performances.
- Fully supported at every stage of the project by Knauf's market-leading technical and sales support personnel, both pre-site and during construction.

Knauf Technical Services

Help is available via our team of 'Technical Support Officers' who are ready to take your technical enquiries providing you with expert technical advice on interior and exterior solutions to meet your project needs.

Knauf Specification Service

Tailored project specifications can be delivered with the support of highly skilled and trained Project Specification Managers and via Knauf Planner Suite (<https://discover.knauf.com/en-gb/planner-suite>). Knauf Planner Suite – System Finder is a three-in-one solution for simple product and system searches, immediate supporting data, and Drywall Specification Documents. Load your free planning assistant directly in your Revit or ArchiCAD, or simply use the Knauf Planner Suite – System Finder web app.

Knauf On-Site Service

Knauf Project Technical Managers provide on-site project support to assist with the installation of Knauf systems. If Knauf product and system training is required, this can be delivered by the Knauf Technical Services Team.

*To ensure you have the most up-to-date information about our **System Performance Warranty**, we encourage you to review the latest terms and conditions. Visit our website at knauf.com for detailed guidance and updates.*

Knauf Product Warranty

Knauf warrants that its gypsum and metal products ("Products"), as defined below, will be free from defects in design, material and workmanship, if properly installed and used under normal conditions by the customer or any third party (the "Warranty").

Products covered under this Warranty:

- Gypsum plasterboards, gypsum ceiling products and gypsum flooring products
- Interior metal sections and accessories
- Exterior metal sections and accessories
- Knauf AQUAPANEL® products and accessories
- Finishing and jointing compounds

Coverage

The Warranty will cover any failures of the Products, under normal use, which result from a defect in design, material or workmanship ("Warrantable Failure") subject to the conditions set out in A to D below. The Warranty coverage for the Products is 12 months from the date of completed installation ("Warranty Period").

Limitations and Exclusions

Knauf will not be responsible for any Warrantable Failures which result from:

- Improper storage. Products must be stored in an enclosed, dry, and clean environment protected from the outside elements including, but not limited to, rain, snow or other causes of moisture.
- Incorrect installation or failure to comply with all applicable Knauf specifications and published instructions in relation to the installation or the repair, replacement, adjustment, or alteration of the Products.
- Abuse or neglect, misapplication, abnormal or improper use or modification of the Products.
- Normal wear and tear

Claim

A claim for a Warrantable Failure ("Claim") must be made in writing within seven (7) days of the Warrantable Failure occurring.

The Claim must contain:

- the name of the Product(s)
- the order reference number
- full particulars of the defect
- the date of purchase
- the reasons why the customer holds Knauf responsible for the repair and/or replacement costs
- primary contact person name and contact details

If Knauf accepts responsibility for a Warrantable Failure it will, at its cost and at its option, either repair or replace the Products with the same grade and type of Products.

Any replacement Product will not benefit from a new twelve months' period of coverage but will only get the benefit of the unexpired Warranty Period for the replaced Product.

Save as otherwise provided herein, the Warranty is the sole Warranty made by Knauf in relation to the Product and all other representations, conditions, warranties, and terms (including Knauf's standard terms and conditions of sale), whether express or implied by law, statute or otherwise as to the quality, merchantability or fitness for a particular purpose are excluded.

The remedy of repair or replacement of the Product is the sole remedy for a Warrantable Failure and Knauf accepts no liability for any loss of profit, loss of use, loss of production, loss of contracts or for any financial or economic loss or for any indirect or consequential damage whatsoever.

*To ensure you have the most up-to-date information about our **Product Warranty**, we encourage you to review the latest terms and conditions. Visit our website at knauf.com for detailed guidance and updates.*



Customer Service

UK: 0800 521 050
Eire: 01 4620739
cservice@knauf.com

Technical Service

0800 521 050 (Option 2)
technical-uk@knauf.com

Social Media

 KnaufUK

 Knauf UK & Ireland

 @Knauf_UK

Addresses

Knauf
Kemsley Fields Business Park
Sittingbourne
Kent
ME9 8SR

Knauf
87 Broomhill Road
Tallaght
Dublin 24
D24 WR85

Website

www.knauf.com
www.knauf.ie

The information given in this publication is believed to be current and accurate as at the date of publication, but no warranty, express or implied is given.
Updates will not be automatically issued.
© Copyright Knauf 2025

Creation Date: 25/03/2025
Revision Reference: 005
Revision Date: 11/03/2026