


Perforated Corner Trim

Technical Data Sheet 12/2023

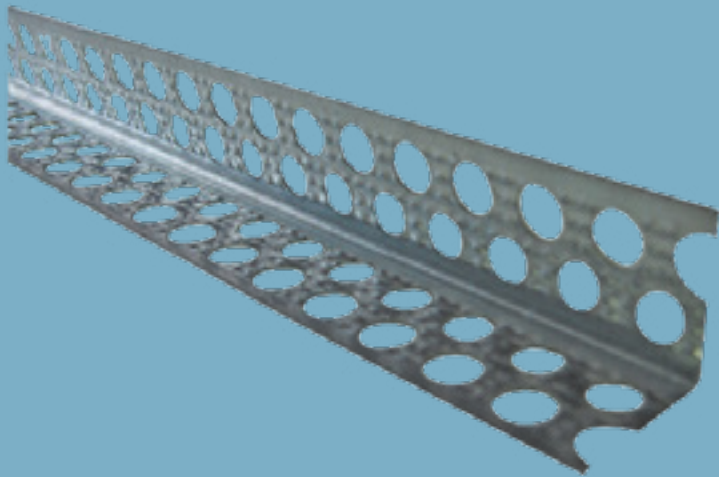

Perforated Corner Trim

Profile

Product Description

Used to protect outer corners of gypsumboard from any deformations caused by impacts and to provide smooth corners.

Storage

- Profiles are tied and packed on pallets.
- Direct contact with water should be avoided.
- Packages should be stored in flat, dry and clean areas.

Standards referred to

-

Fields of Application

- Outer corners of Suspended Ceiling Systems
- Outer corners of Partition Wall Systems
- Outer corners of Wall Cladding Systems

Technical Data

Description	Thickness (mm)	Weight (kg/m)	Width (mm)	Height (mm)	Length (mm)
Perforated Corner Trim (Steel)	0,35	0,126	23	23	2700
Perforated Corner Trim (Aluminium)	0,35	0,053	23	23	

Product Range

Description	Packaging (pcs./pallet)	Material Number
Perforated Corner Trim (Steel)	50	142223
Perforated Corner Trim (Aluminium)	50	240771

System Performance Values

Performance values as sound insulation, fire resistance etc. may differ acc. to the drywall system to be applied. Please check the performance values of the drywall systems;

[Knauf Technical Website](#)
[Document Center](#)

Application

Application should be done acc. to the applicable standards (TS 1475) and acc. to the Knauf Technical Brochures of the respective drywall system.

▶ 444 YAPI - 9274

▶ www.knauf.com.tr / www.teknik.knauf.com.tr

▶ teknik@knauf.com

Center: Knauf Moment Beştepe Office, Beştepe Mah. 32.Cadde No:1/212-218 06560 Beştepe-Yenimahalle / ANKARA Tel: 0312 297 0100 Faks: 0312 266 4506