




ARMSTRONG PERLA OP 19mm

- Armstrong PERLA OP 19mm lamele pružaju glatku laminiranu bijelu završnu obradu, omogućuju izvrsnu apsorpciju zvuka razreda A i dobru zvučnu izolaciju te su idealno rješenje za primjenu kod otvorenih prostora (open spaces), koridore - hodnici
- Izvrsna apsorpcija zvuka ($0,90 \alpha_w$) i dobro izolacija zvuka (34 dB)
- Dobra refleksija svjetlosti (85%)
- ISO 5
- Idealno za otvorene prostore (call centri, knjižnice, kafeterije itd.), kao i za hodnike

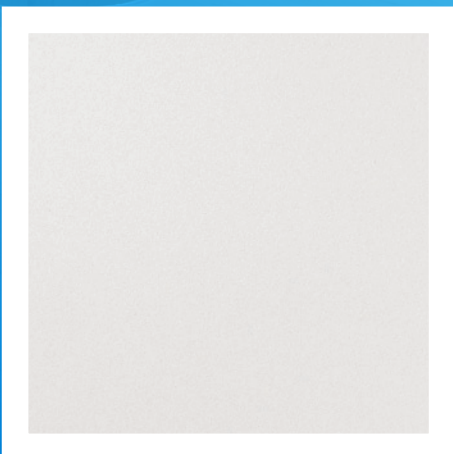

ARMSTRONG PERLA OP 19mm

Detalji rubova Ostali detalji rubova na upit		Board 	SL2 														
Debljina (mm)		19	19														
Dimenzije (mm) Ostali formati na upit		1500 x 600 1800 x 600	1500 x 300 1800 x 300														
Sustav		Vidljiva konstrukcija, demontažni - sustav C	Poluskrivena konstrukcija, lamele, demontažni - sustav I.3 Poluskrivena konstrukcija, lamele na Bandraster paralelnim profilima - demontažni sustav I.2 Poluskrivena konstrukcija, koridor, demontažni - sustav F.2														
Težina		5.2 kg / m ²															
Boja		Bijela															
Aposrpcija zvuka		EN ISO 354 $\alpha_w = 0.90$ prema EN ISO 11654 - Class A <table border="1"> <thead> <tr> <th>Frekvencija f (Hz)</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>α_p</td> <td>0.45</td> <td>0.70</td> <td>0.80</td> <td>0.90</td> <td>1.00</td> <td>1.00</td> </tr> </tbody> </table> NRC = 0.85 prema ASTM C 423		Frekvencija f (Hz)	125	250	500	1000	2000	4000	α_p	0.45	0.70	0.80	0.90	1.00	1.00
Frekvencija f (Hz)	125	250	500	1000	2000	4000											
α_p	0.45	0.70	0.80	0.90	1.00	1.00											
Uzdužna zvučna izolacija		EN ISO 10848-2 $D_{n,f,w} = 34$ dB prema EN ISO 717-1															
Reakcija na požar		Euroclass A2-s1, d0 prema EN 13501-1	RUS KM1 (G1, V1, D1, T1) prema 123-FZ														
Refleksija svjetlosti		85%															
Toplinska provodljivost		$\lambda = 0.060$ W/mk prema EN 12667															
Propusnost zraka		PM1 (≤ 30 m ³ /hm ²) prema DIN 18177															
Otpornost na vlagu		95% RH															
Razred čistoće prostora		ISO 5 prema EN ISO 14644-1															
Kvaliteta zraka		 A+	 E1														
Čišćenje			 IACG														
Održavanje	 EN ISO 14021 38%	 EN ISO 14025	 M1	 www.blauer-engel.de/uz132													

Proizvodi se mogu razlikovati između prodajnih područja. Molimo kontaktirajte svog lokalnog prodajnog predstavnika. Za dodatne i pravne informacije posjetite našu web stranicu.