
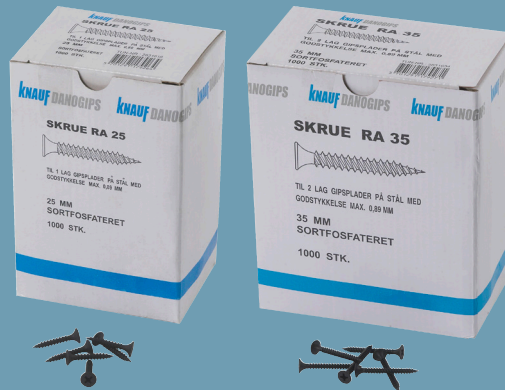


## RA screws

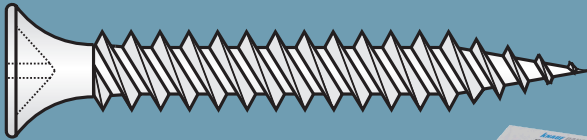

## RA screws for plasterboard on steel profiles EN 14566

Page: 1/1

03/2016

### PRODUCT DATA

CHARACTERISTIC		VALUE	UNIT
Fire	Reaction to fire	A1	Incombustible
Contents	Hazardous contents	NPD	
Surface		Black phosphated	
Corrosion class		C2	
Measurements	Lengths	25 mm 35 mm 51 mm 70 mm	
Explanatory illust.	A: Screw head diameter	8.00 - 8.50	mm
	D: Screw thread diameter	3.40 - 3.65	mm
	L: Nominal length	± 1	mm

### Areas of use

For fastening plasterboard and associated products inside buildings. For steel thickness max. 0.89 mm.

### Variants/sizes:

- Screw RA 25
- Screw RA 35
- Screw RA 51
- Screw RA 70
- Screw RAB 25 (banded)
- Screw RAB 35 (banded)

