




# **USGKnauf Ultraframe™ U Track**

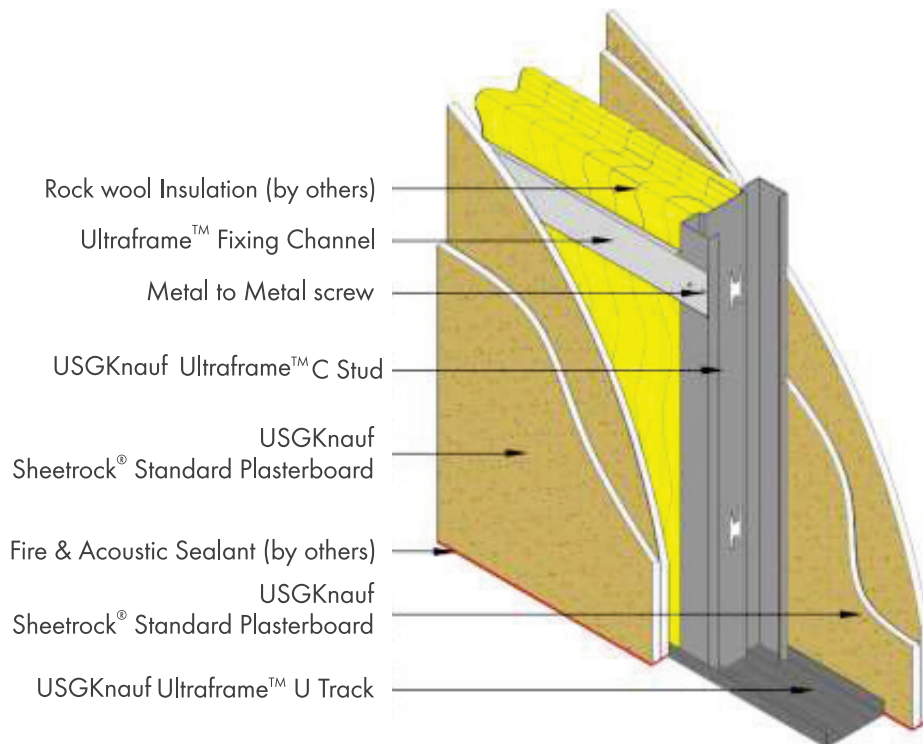

## Description:

USGKnauf Ultraframe™ U Track is an integral part of USGKnauf drywalls. This is one of the essential components in drywalls. The C Studs are friction fitted into USGKnauf Ultraframe™ U Track.


These are rolled formed on specially designed automatic machines.

## Product Properties:

Description	Unit	Range
Flange (A)	mm	30 (+/-0.50)
Flange (B)	mm	30 (+/-0.50)
Web (C)	mm	52 / 72 / 92 (+/-0.50)
Thickness (D)	mm	0.55 / 0.70 (+/-0.05)
Standard Length	mm	3660 (+/-5)
Galvanizing	GSM	120 GSM as per IS277
Yield Strength	MPA	Min.230

#Deep Flange of 50 mm U Track is available in thickness of 0.70 mm.

## Drawing:

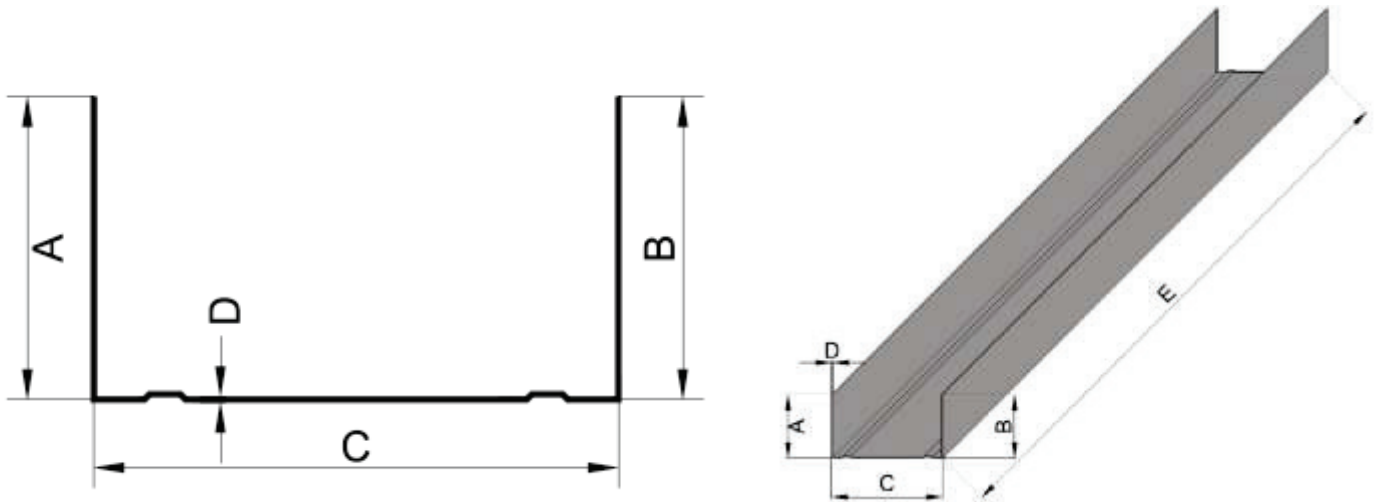

## Drywall Ultraframe™ Framing:

- Ultraframe™ U Track Shall be fixed at floor and Soffit with approved fasteners.
- The C Studs are inserted into U Track with spacing at 610 mm /406 mm /305 mm centers depending upon the design considerations.
- The USGKnauf Ultraframe™ U Track has two flanges which are of dimensions 30 mm each.

## Safety:

While handling & cutting of Ultraframe™ U Track, please adhere to the safety guidelines & wear the essential PPE.

### Knauf India Private Limited

**Head Office:** 9<sup>th</sup> Floor, Plaza Tower, DLF Phase -1, Gurugram - 122002, Haryana, India

**Customer Care No:** +91 - 9015147147

**Email:** info.india@knauf.com

[www.usgknauf.com](http://www.usgknauf.com)