

# ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025, ISO 21930 and EN 15804+A2 for:

**KI MULTIFIT 035, Naturoll 035,  
KI FIT 035, EXPERT LRR 035, EXPERT  
LBR 035, UNIFIT 035, Ecoblanket 35**

From

**KNAUF**INSULATION



Program:

Programme operator:

EPD registration number:

Publication date:

Validity date:

Update date

Version

The International EPD® System

[www.environdec.com](http://www.environdec.com)

EPD International AB

S-P-10598

2023-09-07

2028-09-07

2025-04-14

4



challenge.  
create.  
care.

## Programme-related information and verification

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804+A2. For further information about comparability, see EN 15804+A2 and ISO 14025.

|                                        |                                                                                                                                                                                                                                    |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Programme:</b>                      | The International EPD® System<br>EPD International AB<br>Box 210 60<br>SE-100 31 Stockholm<br>Sweden<br><a href="http://www.environdec.com">www.environdec.com</a><br><a href="mailto:info@environdec.com">info@environdec.com</a> |
| <b>EPD registration number:</b>        | S-P-10598                                                                                                                                                                                                                          |
| <b>Published:</b>                      | 2023-09-07                                                                                                                                                                                                                         |
| <b>Valid until:</b>                    | 2028-09-07                                                                                                                                                                                                                         |
| <b>EPD owner</b>                       | Knauf Insulation Sprl<br>Rue de Maestricht 95<br>4600 Visé (Belgium)                                                                                                                                                               |
| <b>Product Category Rules:</b>         | PCR 2019 :14. Construction products (EN 15804+A2)<br>Version 1.2.5<br>Sub-PCR-005 Thermal insulation products (EN 16783:<br>2017) Version: 2019-12-20                                                                              |
| <b>Product group classification:</b>   | UN CPC 37                                                                                                                                                                                                                          |
| <b>Reference year for plant data:</b>  | Bernburg (2022), Visé (2022), Krupka (2022) and<br>Lannemezan (2022)                                                                                                                                                               |
| <b>Geographical application scope:</b> | Europe                                                                                                                                                                                                                             |

|                                                                                                                                                                                                                                                    |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CEN standard EN 15804+A2 serves as the Core Product Category Rules (PCR)                                                                                                                                                                           |
| Product category rules (PCR): PCR 2019:14. Construction products (EN 15804+A2) Version 1.2.5<br>Sub-PCR-005 Thermal insulation products (EN 16783: 2017) Version: 2019-12-20                                                                       |
| PCR review was conducted by: The Technical Committee of the International EPD@ System                                                                                                                                                              |
| Independent third-party verification of the declaration and data, according to ISO 14025:2006.                                                                                                                                                     |
| <input checked="" type="checkbox"/> EPD verification by EPD Process Certification*                                                                                                                                                                 |
| Third-party verification: <i>Viktor Hakkarainen, Bureau Veritas (Certificate number: SE008541-1)</i> an<br>approved certification body accountable for third-party verification.                                                                   |
| Third-party verifier is accredited by: <i>SWEDAC - Sverige AB 1236</i>                                                                                                                                                                             |
| *For EPD Process Certification, an accredited certification body certifies and reviews the management<br>process and verifies EPDs published on a regular basis. For details about third-party verification<br>procedure of the EPDs, see the GPI. |
| Procedure for follow-up of data during EPD validity involves third party verifier:<br><input checked="" type="checkbox"/> Yes <input type="checkbox"/> No                                                                                          |

*An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com).*

### Information about the company

#### Description of the organisation:

Knauf Insulation is a leading provider of glass and rock mineral wool, as well as wood wool insulation solutions. With more than 40 years of experience in the insulation industry, it is one of the most respected names in insulation worldwide.

As part of the Knauf Group, a €15.4bn turnover family-owned global manufacturer of building materials and construction systems, Knauf Insulation employs more than 6,000 employees and has 28 manufacturing sites in 15 countries, with a turnover of €2.5bn.

Knauf Insulation's mission is to challenge conventional thinking and create innovative insulation solutions that shape the way we live and build in the future, with care for the people who make them, the people who use them and the world we all depend on. Its vision is to lead the change in smarter insulation solutions for a better world.



The Headquarters are located in Visé, in Belgium.



## Product-related or management system-related certifications:

All Knauf Insulation sites which are covered by EPD process certification system, including the related site for this EPD, are ISO 9001, ISO 14001, ISO 50001 and ISO 45001 certified under the scope "Design, Development and Production of Insulation Materials and Systems".

Knauf Insulation supports the Ten Principles of the United Nations Global Compact on human rights, labor, environment and anti-corruption.

## Name and location of production site:

The application in construction of the concerned product is Europe. The data utilized for the production stage life cycle assessment is related to production plants located in Bernburg (Germany), Visé (Belgium), Krupka (Czech Republic) and Lannemezan (France).

Weststraße 1, 06406 Bernburg (Saale), Germany  
 Rue de Maestricht 95, 4600 Visé, Belgium  
 Pod dolní drahou 110, 417 42 Krupka, Czech Republic  
 501 Voie Napoleon III, 65300 Lannemezan, France


## Information about Glass Mineral Wool production

Knauf Insulation glass mineral wool products (GMW) are available in the form of rolls, slabs and blowing wool.

In general, the density for glass mineral wool ranges from 10 to 85 kg/m<sup>3</sup>; glass mineral wool consists of at least 92% inert material. The inert part is made of recycled glass (external cullet, up to 80% of the composition) to which sand and dolomite are added before being melted in a furnace.

Blowing wool is an un-bonded, virgin fibrous insulation, produced as a loose-fill product whilst rolls and slabs are bonded and cured in an oven.

The remaining fraction for slabs and rolls (less than or equal to 8%) is made of bio-based binder components. At Knauf Insulation, the binder used for the glass mineral wool products is the ECOSE® Technology binder. ECOSE® Technology contains no added formaldehyde or phenol. Its origin is plant starch.

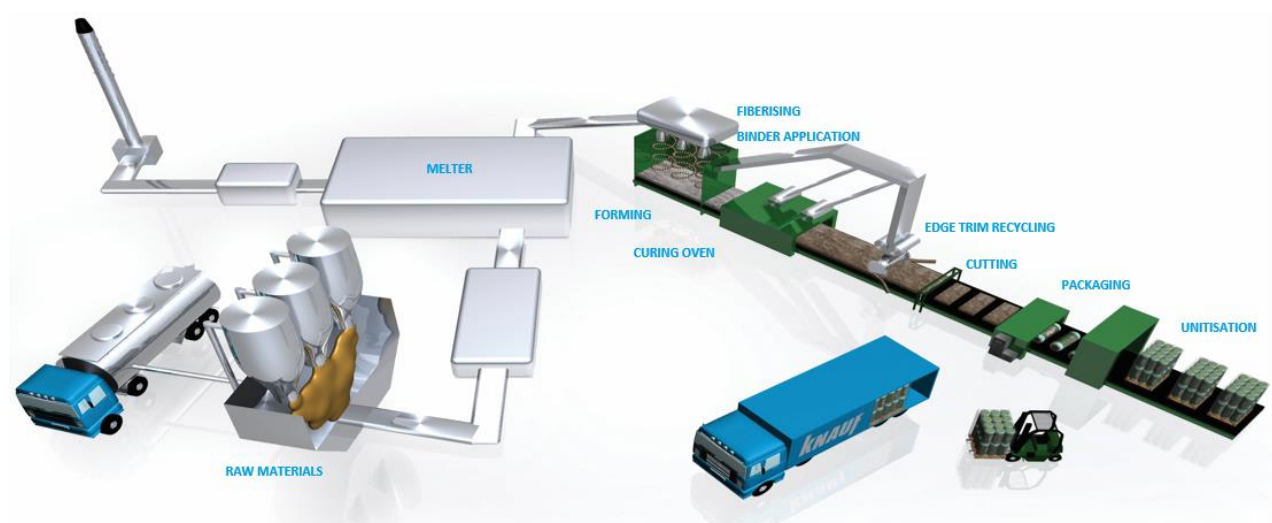

## Product information

**Product name:** KI MULTIFIT 035, Naturoll 035, KI FIT 035, EXPERT LRR 035, EXPERT LBR 035, UNIFIT 035, Ecoblanket 35

**Product identification:** The declared insulation consists of KI MULTIFIT 035, Naturoll 035, KI FIT 035, EXPERT LRR 035, EXPERT LBR 035, UNIFIT 035, Ecoblanket 35, Ecoblanket 35Ecoblanket 35a glass mineral wool, unfaced rolls of 1m<sup>2</sup> (considered for this EPD).

For the placing on the construction products market in the European Union/ EFTA (with exception of Switzerland), the Regulation/ (EU) No 305/2011/ applies. The concerned products need Declarations of Performance /DoP G4222LPCPR, G4335LPCPR, G4232LPCPR, G4220LPCPR taking into consideration the harmonized product standard /EN 13162/ and the /CE-mark/.

**Product description:** The main application for KI MULTIFIT 035, Naturoll 035, KI FIT 035, EXPERT LRR 035, EXPERT LBR 035, UNIFIT 035, Ecoblanket 35 is Pitched Roof.

**Geographical scope:** The manufacturing is in Bernburg (Germany), Visé (Belgium), Krupka (Czech Republic) and Lannemezan (France). Energy-related information is described in the next chapter. Regarding the market area, the product is mainly marketed in Europe.

### Technical Characteristics:

| Parameter                                   | Value                           |
|---------------------------------------------|---------------------------------|
| Thermal conductivity/ EN 12667              | 0.035W/(mK) at 10°C             |
| Water vapor diffusion resistance (EN 12086) | 1                               |
| Thermal Resistance (ISO 8301)               | 2.86 m <sup>2</sup> K/W         |
| Reaction to fire (EN 13501-1)               | A1                              |
| Declared density range/ EN 1602             | 19.1 kg/m <sup>3</sup> (+/-10%) |

### UN CPC code:

37990: Non-metallic mineral products (including mineral wool, expanded mineral materials, worked mica, articles of mica, non-electrical articles of graphite or other carbon and articles of peat).

## LCA information

### Functional unit / declared unit

The declared unit is 1m<sup>2</sup> of unfaced glass mineral wool KI MULTIFIT 035, Naturoll 035, KI FIT 035, EXPERT LRR 035, EXPERT LBR 035, UNIFIT 035, Ecoblanket 35 with a R-value of 2.86 m<sup>2</sup>K/W (for a thickness of 100 mm and a declared lambda of 0.035W/mK).

**Reference service life:** The RSL or durability of KI MULTIFIT 035, Naturoll 035, KI FIT 035, EXPERT LRR 035, EXPERT LBR 035, UNIFIT 035, Ecoblanket 35 is as long as the lifetime of the building equipment in which it is used (at least 50 years).

### Time representativeness & Information on Specific Data:

Plant production data for the complete year are used (Bernburg (2022), Visé (2022), Krupka (2022) and Lannemezan (2022)). The reference product group considered in this EPD are produced in multiple Knauf Insulation manufacturing sites with equal weight.

The data which is used to carry out the LCA calculations contains >90 % specific data and less 10 % generic data.

### Database(s) and LCA software used:

The LCA model, the data aggregation and environmental impacts are calculated with the software LCA for Experts (GaBi) 10.7 and its content version 2023.1. The impact models used are those indicated in EN 15804:2012+A2:2019.


### Gas information

Gas input (reference year: 2019) from Germany and Belgium and Czech Republic and France is selected for Bernburg (Germany), Visé (Belgium), Krupka (Czech Republic) and Lannemezan (France).

### Electricity information

| Plants (countries) | Electricity mixes             | Locations (electricity) | Dataset Reference Year | Impact (kg CO <sub>2</sub> /kwh) |
|--------------------|-------------------------------|-------------------------|------------------------|----------------------------------|
| Bernburg           | Renewable Energy Certificates | Europe                  | 2019                   | 0.014                            |
| Visé               |                               |                         |                        | 0.026                            |
| Krupka             |                               |                         |                        | 0.014                            |
| Lannemezan         | Residual                      | France                  | 2021                   | 0.062                            |

## System diagram:

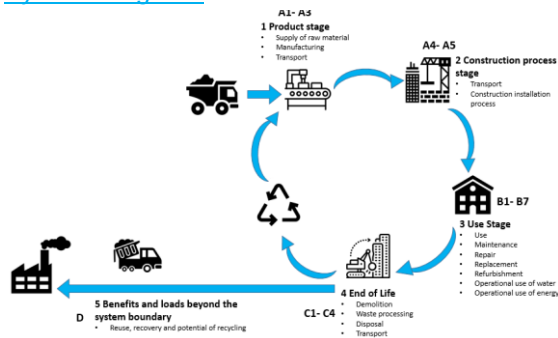

## Description of system boundaries:

The system boundary of the EPD follows the modularity approach defined by the EN 15804:2012+A2:2019.

### The type of EPD is cradle-to-grave.

List and explanation of the modules declared in the EPD.

#### The product stage (A1-A3) includes:

- A1 - raw material extraction and processing, processing of secondary material input (e.g. recycling processes),
- A2 - transport to the manufacturer and
- A3 - manufacturing.

This includes provision of all materials, products and energy, packaging processing and its transport, as well as waste processing up to the end-of-waste state or disposal of final residues during the product stage.

The LCA results are given in an aggregated form for the product stage, meaning that the modules A1, A2 and A3 are considered as a unique module A1-A3.

| Product Parameters        | Value               |
|---------------------------|---------------------|
| Glass mineral wool weight | 1.91 kg             |
| Surface                   | 1m <sup>2</sup>     |
| Thickness                 | 100 mm              |
| Volume                    | 0.10 m <sup>3</sup> |
| Packaging Plastic sheet   | 0.03 kg             |
| Packaging Wooden pallet   | 0.06 kg             |

#### The construction process stage includes:

- A4 - transport to the construction site and
- A5 - installation into the building.

The transport to the building site (A4) and installation (A5) included in this LCA use the following parameters:

| Parameter                                                   | Value                                    |
|-------------------------------------------------------------|------------------------------------------|
| Average transport distance (truck)                          | 600 km                                   |
| Type of fuel and vehicle used for transport (truck)         | Truck Euro 6 (28 – 32 t / 22 t payload). |
| Truck capacity utilization (including 30% of empty returns) | 37.01 % of the weight capacity           |
| Loss of materials in construction site                      | 2%                                       |
| Packaging Wooden pallet                                     | 40% recycled, 60% incinerated            |
| Packaging Plastic sheet                                     | 40% recycled, 60% incinerated            |

The treatment and the transport of the packaging waste after the installation of the product (A5) has been considered.

#### The Use stage (B1-B7) includes:

- B1: Use
- B2: Maintenance
- B3: Repair
- B4: Replacement
- B5: Refurbishment
- B6: Operational Energy Use
- B7: Operational Water Use

Once installation is complete, no actions or technical operations are required during the use stages until the end of life. Therefore, the mineral wool has no impact (excluding potential energy savings) on this stage.

#### The end-of-life stage includes:

- C1 - de-construction, demolition,
- C2 - transport to waste processing,
- C3 - waste processing for reuse, recovery and/or recycling and
- C4 - disposal.

This includes provision of all transports, materials, products and related energy and water use. The common manual dismantling impact of insulation is considered as very small and can be neglected in C1.

Although glass mineral wool products from Knauf Insulation are partly recycled at their end-of-life, an established collection system does not yet exist. Therefore, the assumption chosen in this study, 100% landfill (C4) after the use phase, is the most conservative approach.

| Parameter                                                                   | Value                                                                                                         |
|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Disposal type (mineral wool)                                                | 100% landfill                                                                                                 |
| Average transport distance waste (C2)                                       | 50 km                                                                                                         |
| Type of fuel and vehicle consumption or type of vehicle used for transport. | Truck-trailer, Euro 6, 34 - 40t gross weight / 27t payload capacity/ 40 L for 100 km. (if 100 % utilization). |
| Truck capacity utilization                                                  | 50 % of the weight capacity                                                                                   |

**Module D** includes reuse, recovery and/or recycling potentials. According to EN 15804:2012+A2:2019 any declared benefits and loads from net flows leaving the product system not allocated as co-products and having passed the end-of waste state shall be included in module D. Benefits considered in module D originate from packaging recycling or incineration.

#### Recycled material

The mineral wool waste that is originating from the manufacturing process in the cutting lines is recycled internally and reinjected into the mineral wool production mattress.

Recycled content average for the considered plants for this product was calculated at 74% in Bernburg (2022), Visé (2022), Krupka (2022) and Lannemezan (2022) according to the cullet market availability. The calculation is done following EN 15804+A2 Use of Resources indicator Secondary Material (SM), taking into account the % of secondary materials from external supply input into the batch against virgin raw materials supply. The external waste considerations are also following the ISO 14021 norm.

#### Additional information:

All raw materials for the manufacturing of the declared product, the required energy, water consumption and the resulting emissions are considered into the LCA. Consecutively, the recipe components with a share even less than 1% are included. All neglected processes contribute less than 5% to the total mass or less than 5% to the total energy consumption. For information, the impact of the glass mineral wool plant construction or manufacturing

equipment is not taken into account in the life cycle assessment. Allocation criteria with by-products (mineral wool for ceiling tiles) are based on cost.

Materials for fixation and installation are not included into this LCA scope. This may lead to the need of additional construction products or materials for which the impact is not included in this EPD and which shall be taken into account at building level. Regarding installation this EPD only includes the environmental impact related to the product itself like material losses and packaging end of life.

Knauf Insulation adopts a conservative approach into its EPDs.

Conversion factor for this EPD is a multiplication of the results by 0.52 to get indicators results for 1 kg. In principal, an insulation product should always be characterized by its thickness and an R value, only taking into account the product's weight could lead to wrong interpretation. In principal, an insulation product should always be characterized by its thickness and an R value, only taking into account the product's weight could lead to wrong interpretation.

#### Difference versus previous versions:

In the second version of this document, the product name "Expert LBR 035" and "Ecoblanket 35" was added to the product names. In the third version, the results for the GWP-biogenic indicator were corrected to ensure that biogenic carbon is balanced across all life stages.

#### More information:

[www.knaufinsulation.com](http://www.knaufinsulation.com)

#### Name and contact information of LCA practitioner:

Clara del Val

Knauf Insulation Sprl

Rue de Maestricht 95

4600 Visé

Belgium

Contact : [sustainability@knaufinsulation.com](mailto:sustainability@knaufinsulation.com)

## Content Declaration

The product does not contain substances on the "Candidate List of Substances of Very High Concern for Authorisation" under the REACH regulation (if above 0.1% of the mass).

| Product components                         | Weight %             | Pre-consumer material, weight - %<br>(out of total) | Post- consumer % (out of total) | Renewable material, weight- %<br>(out of total) |
|--------------------------------------------|----------------------|-----------------------------------------------------|---------------------------------|-------------------------------------------------|
| Mineral Materials                          | 20 – 60              | 0                                                   | 0                               | 0                                               |
| Recycled Glass                             | 40 - 80              | 0-25                                                | 75-100                          | 0                                               |
| Bio - based binder                         | 2 - 15               | 0                                                   | 0                               | 0                                               |
| Additives                                  | < 1                  | 0                                                   | 0                               | 0                                               |
| Packaging Materials                        | Weight, kg/ DU or FU | Weight -% (versus the product)                      |                                 |                                                 |
| Polyethylene film (0-50% recycled content) | 0.03                 | 1.57%                                               |                                 |                                                 |
| Wooden pallet                              | 0.06                 | 2.93%                                               |                                 |                                                 |
| TOTAL                                      | 0.09                 | 4.50%                                               |                                 |                                                 |

## Declared Modules, geography, share of specific data (in GWP-GHG indicator) & data variation

Life cycle stages as defined in the European standard EN 15978 :2011 and the description of the system boundaries for the reference product LCA (X = included in the LCA, MND = module is not declared)

|                          | Product stage       |           |               | Construction process stage |                           | Use stage |             |        |             |               |                        |                       |                            | End of life stage |                  |          |        | Resource recovery stage |
|--------------------------|---------------------|-----------|---------------|----------------------------|---------------------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|----------------------------|-------------------|------------------|----------|--------|-------------------------|
|                          | Raw material supply | Transport | Manufacturing | Transport                  | Construction installation | Use       | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction demolition | Transport         | Waste processing | Disposal |        |                         |
| Module                   | A1                  | A2        | A3            | A4                         | A5                        | B1        | B2          | B3     | B4          | B5            | B6                     | B7                    | C1                         | C2                | C3               | C4       | D      |                         |
| Modules declared         | X                   | X         | X             | X                          | X                         | X         | X           | X      | X           | X             | X                      | X                     | X                          | X                 | X                | X        | X      |                         |
| Geography                | Europe              | Europe    | Europe        | Europe                     | Europe                    | Europe    | Europe      | Europe | Europe      | Europe        | Europe                 | Europe                | Europe                     | Europe            | Europe           | Europe   | Europe |                         |
| Specific data used       | > 90 %              |           |               |                            |                           |           |             |        |             |               |                        |                       |                            |                   |                  |          |        |                         |
| Variation* – products    | <10 %               |           |               |                            |                           |           |             |        |             |               |                        |                       |                            |                   |                  |          |        |                         |
| Variation** – Bernburg   | -7.9%               |           |               |                            |                           |           |             |        |             |               |                        |                       |                            |                   |                  |          |        |                         |
| Variation** – Visé       | 9.8%                |           |               |                            |                           |           |             |        |             |               |                        |                       |                            |                   |                  |          |        |                         |
| Variation** – Krupka     | -2.2%               |           |               |                            |                           |           |             |        |             |               |                        |                       |                            |                   |                  |          |        |                         |
| Variation** – Lannemezan | 0.3%                |           |               |                            |                           |           |             |        |             |               |                        |                       |                            |                   |                  |          |        |                         |

\*Variation regarding the average EPD result in terms of GWP-GHG indicator amongst products covered with this EPD

\*\*Variation regarding the average EPD result in terms of GWP-GHG indicator

## Environmental performance

**Potential environmental impacts:** 1m<sup>2</sup> of glass mineral wool KI MULTIFIT 035, Naturoll 035, KI FIT 035, EXPERT LRR 035, EXPERT LBR 035, UNIFIT 035, Ecoblanket 35 with a thickness of 100 mm and the R value of 2.86 m<sup>2</sup>K/W.

*The results communicated is representable for all the products mentioned in this EPD.*

| ENVIRONMENTAL IMPACTS |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |           |          |          |          |          |          |          |          |           |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| Parameter             | Unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | A1-3***   | A4       | A5       | B1-B7    | C1       | C2       | C3       | C4       | D**       |
| GWP-fossil            | kg CO <sub>2</sub> eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1.76E+00  | 1.52E-01 | 8.79E-02 | 0.00E+00 | 0.00E+00 | 7.47E-03 | 0.00E+00 | 3.13E-02 | -5.22E-02 |
| GWP-biogenic          | kg CO <sub>2</sub> eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | -3.59E-01 | 1.98E-03 | 9.35E-02 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 2.90E-01 | 0.00E+00  |
| GWP-luluc             | kg CO <sub>2</sub> eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1.29E-03  | 1.36E-03 | 7.04E-05 | 0.00E+00 | 0.00E+00 | 6.66E-05 | 0.00E+00 | 1.34E-04 | -4.05E-06 |
| GWP-total             | kg CO <sub>2</sub> eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1.40E+00  | 1.55E-01 | 1.82E-01 | 0.00E+00 | 0.00E+00 | 7.54E-03 | 0.00E+00 | 3.21E-01 | -5.22E-02 |
| ODP                   | kg CFC 11 eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1.20E-11  | 1.91E-14 | 2.60E-13 | 0.00E+00 | 0.00E+00 | 9.35E-16 | 0.00E+00 | 1.76E-14 | -2.52E-13 |
| AP                    | mol H <sup>+</sup> eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1.14E-02  | 1.61E-04 | 2.58E-04 | 0.00E+00 | 0.00E+00 | 7.68E-06 | 0.00E+00 | 2.28E-04 | -8.73E-05 |
| EP-freshwater         | kg P eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2.51E-05  | 5.35E-07 | 5.44E-07 | 0.00E+00 | 0.00E+00 | 2.63E-08 | 0.00E+00 | 6.56E-07 | 1.00E-08  |
| EP-marine             | kg N eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1.99E-03  | 5.13E-05 | 4.75E-05 | 0.00E+00 | 0.00E+00 | 2.41E-06 | 0.00E+00 | 6.29E-05 | -2.80E-05 |
| EP-terrestrial        | mol N eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 4.32E-02  | 6.15E-04 | 9.79E-04 | 0.00E+00 | 0.00E+00 | 2.90E-05 | 0.00E+00 | 6.71E-04 | -3.09E-04 |
| POCP                  | kg NMVOC eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 3.85E-03  | 1.58E-04 | 9.86E-05 | 0.00E+00 | 0.00E+00 | 7.45E-06 | 0.00E+00 | 1.84E-04 | -9.89E-05 |
| ADP-minerals&metals*  | kg Sb eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 8.01E-07  | 9.64E-09 | 1.68E-08 | 0.00E+00 | 0.00E+00 | 4.73E-10 | 0.00E+00 | 3.24E-09 | -2.57E-09 |
| ADP-fossil*           | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 3.05E+01  | 1.99E+00 | 7.23E-01 | 0.00E+00 | 0.00E+00 | 9.79E-02 | 0.00E+00 | 4.12E-01 | -1.36E+00 |
| WDP                   | m <sup>3</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1.10E-01  | 1.77E-03 | 1.28E-02 | 0.00E+00 | 0.00E+00 | 8.68E-05 | 0.00E+00 | 2.36E-03 | -5.95E-03 |
| Acronyms              | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption |           |          |          |          |          |          |          |          |           |

\* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

\*\* : [Life Cycle D stage covers benefits and loads beyond the system boundary stage (reuse, recovery and recycling potential) therefore, when summing up results, this stage should be considered separately].

\*\*\*: The indicators results are calculated with a reference product based on equal weight repartition between plants. The indicators results span between the reference product and the 100% sourced product from each dedicated plant may vary more than 10% (concerning A1- A3).

## Potential environmental impact – additional mandatory and voluntary indicators

| Indicator   | Unit                   | Tot.A1-A3 | A4       | A5       | B1-B7    | C1       | C2       | C3       | C4       | D         |
|-------------|------------------------|-----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| GWP-GHG [2] | kg CO <sub>2</sub> eq. | 1.76E+00  | 1.52E-01 | 8.79E-02 | 0.00E+00 | 0.00E+00 | 7.49E-03 | 0.00E+00 | 3.11E-02 | -5.23E-02 |

[2] The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

**Use of resources:** 1m<sup>2</sup> of glass mineral wool KI MULTIFIT 035, Naturoll 035, KI FIT 035, EXPERT LRR 035, EXPERT LBR 035, UNIFIT 035, Ecoblanket 35 with a thickness of 100 mm and the R value of 2.86 m<sup>2</sup>K/W.

*The results communicated is representable for all the products mentioned in this EPD.*

| RESOURCES USE |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |          |          |          |          |          |          |          |          |           |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| Parameter     | Unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | A1-3***  | A4       | A5       | B1-B7    | C1       | C2       | C3       | C4       | D*        |
| PERE [MJ]     | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 1.50E+01 | 1.45E-01 | 3.22E-01 | 0.00E+00 | 0.00E+00 | 7.12E-03 | 0.00E+00 | 4.81E-02 | -6.87E-01 |
| PERM [MJ]     | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 3.89E+00 | 0.00E+00 | 7.78E-02 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| PERT [MJ]     | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 1.89E+01 | 1.45E-01 | 4.00E-01 | 0.00E+00 | 0.00E+00 | 7.12E-03 | 0.00E+00 | 4.81E-02 | -6.87E-01 |
| PENRE [MJ]    | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 2.92E+01 | 2.00E+00 | 6.98E-01 | 0.00E+00 | 0.00E+00 | 9.83E-02 | 0.00E+00 | 4.13E-01 | -1.36E+00 |
| PENRM [MJ]    | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 1.29E+00 | 0.00E+00 | 2.58E-02 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| PENRT [MJ]    | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 3.05E+01 | 2.00E+00 | 7.24E-01 | 0.00E+00 | 0.00E+00 | 9.83E-02 | 0.00E+00 | 4.13E-01 | -1.36E+00 |
| SM            | kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 1.42E+00 | 0.00E+00 | 2.90E-02 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| RSF           | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| NRSF          | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| FW            | m <sup>3</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 6.55E-03 | 1.59E-04 | 3.89E-04 | 0.00E+00 | 0.00E+00 | 7.80E-06 | 0.00E+00 | 7.85E-05 | -2.06E-04 |
| Acronyms      | PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water |          |          |          |          |          |          |          |          |           |

\*: [Life Cycle D stage covers benefits and loads beyond the system boundary stage (reuse, recovery and recycling potential) therefore, when summing up results, this stage should be considered separately].

\*\*\*: The indicators results are calculated with a reference product based on equal weight repartition between plants. The indicators results span between the reference product and the 100% sourced product from each dedicated plant may vary more than 10% (concerning A1- A3).

**Waste production and output flows:** 1m<sup>2</sup> of glass mineral wool KI MULTIFIT 035, Naturoll 035, KI FIT 035, EXPERT LRR 035, EXPERT LBR 035, UNIFIT 035, Ecoblanket 35 with a thickness of 100 mm and the R value of 2.86 m<sup>2</sup>K/W.

*The results communicated is representable for all the products mentioned in this EPD.*

| OUTPUT FLOWS AND WASTE CATEGORIES |      |           |          |           |          |          |          |          |          |           |
|-----------------------------------|------|-----------|----------|-----------|----------|----------|----------|----------|----------|-----------|
| Parameter                         | Unit | A1-3***   | A4       | A5        | B1-B7    | C1       | C2       | C3       | C4       | D*        |
| Hazardous waste disposed          | kg   | -5.06E-09 | 6.20E-12 | -4.49E-11 | 0.00E+00 | 0.00E+00 | 3.04E-13 | 0.00E+00 | 6.53E-09 | -7.38E-11 |
| Non-hazardous waste disposed      | kg   | 7.91E-02  | 3.05E-04 | 4.59E-02  | 0.00E+00 | 0.00E+00 | 1.50E-05 | 0.00E+00 | 1.91E+00 | 8.55E-04  |
| Radioactive waste disposed        | kg   | 1.55E-03  | 3.75E-06 | 3.34E-05  | 0.00E+00 | 0.00E+00 | 1.84E-07 | 0.00E+00 | 5.63E-06 | -4.57E-05 |
| Components for re-use             | kg   | 0.00E+00  | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| Material for recycling            | kg   | 0.00E+00  | 0.00E+00 | 3.52E-02  | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| Materials for energy recovery     | kg   | 0.00E+00  | 0.00E+00 | 5.29E-02  | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| Exported energy, electricity      | MJ   | 0.00E+00  | 0.00E+00 | 1.61E-01  | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| Exported energy, thermal          | MJ   | 0.00E+00  | 0.00E+00 | 2.90E-01  | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |

\*: [Life Cycle D stage covers benefits and loads beyond the system boundary stage (reuse, recovery and recycling potential) therefore, when summing up results, this stage should be considered separately].

\*\*\*: The indicators results are calculated with a reference product based on equal weight repartition between plants. The indicators results span between the reference product and the 100% sourced product from each dedicated plant may vary more than 10% (concerning A1- A3).

| ADDITIONAL IMPACT CATEGORIES AND INDICATORS |                                                                                                                                                                                                                                             |          |          |          |          |          |          |          |          |           |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| Parameter                                   | Unit                                                                                                                                                                                                                                        | A1-3***  | A4       | A5       | B1-B7    | C1       | C2       | C3       | C4       | D*        |
| PM                                          | Disease Incidence                                                                                                                                                                                                                           | 1.35E-07 | 1.17E-09 | 2.99E-09 | 0.00E+00 | 0.00E+00 | 5.65E-11 | 0.00E+00 | 2.78E-09 | -1.22E-09 |
| IRP                                         | kBq U235 eq.                                                                                                                                                                                                                                | 3.66E-01 | 5.59E-04 | 7.73E-03 | 0.00E+00 | 0.00E+00 | 2.74E-05 | 0.00E+00 | 5.44E-04 | -7.58E-03 |
| ETP- fw                                     | CTUe                                                                                                                                                                                                                                        | 4.70E+01 | 1.42E+00 | 1.03E+00 | 0.00E+00 | 0.00E+00 | 6.95E-02 | 0.00E+00 | 2.53E-01 | -5.10E-01 |
| HTP-c                                       | CTUh                                                                                                                                                                                                                                        | 1.49E-09 | 2.90E-11 | 3.32E-11 | 0.00E+00 | 0.00E+00 | 1.42E-12 | 0.00E+00 | 3.16E-11 | -1.51E-11 |
| HTP- nc                                     | CTUh                                                                                                                                                                                                                                        | 1.23E-07 | 1.54E-09 | 2.74E-09 | 0.00E+00 | 0.00E+00 | 7.54E-11 | 0.00E+00 | 3.52E-09 | -5.11E-10 |
| SQP                                         | dimensionless                                                                                                                                                                                                                               | 4.22E+01 | 8.33E-01 | 8.98E-01 | 0.00E+00 | 0.00E+00 | 4.09E-02 | 0.00E+00 | 9.69E-02 | -4.03E-01 |
| Acronyms                                    | PM = Particulate matter emissions; IRP= Ionising radiation, human health; ETP-fw: Ecotoxicity (freshwater); ETP-c: Human toxicity, cancer effects; HTP-nc: Human toxicity, non-cancer effects; SQP: Land use related impacts / soil quality |          |          |          |          |          |          |          |          |           |

#### [Information on biogenic carbon content](#)

| Results per functional or declared unit |      |          |
|-----------------------------------------|------|----------|
| BIOGENIC CARBON CONTENT                 | Unit | QUANTITY |
| Biogenic carbon content in product      | kg C | 4.61E-02 |
| Biogenic carbon content in packaging    | kg C | 2.80E-02 |

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>.

\*: [Life Cycle D stage covers benefits and loads beyond the system boundary stage (reuse, recovery and recycling potential) therefore, when summing up results, this stage should be considered separately].

\*\*\*: The indicators results are calculated with a reference product based on equal weight repartition between plants. The indicators results span between the reference product and the 100% sourced product from each dedicated plant may vary more than 10% (concerning A1- A3).

## LCA interpretation

### ENVIRONMENTAL IMPACTS

All impact categories except the Abiotic Depletion Potential for Non-Fossil Resources (ADP- minerals & metals) and the Depletion Potential of the Stratospheric Ozone layer (ODP) are dominated by the production. This is mainly due to the consumption of energy (electricity and natural gas) during the production of glass mineral wool.

**The Global Warming Potential (GWP-total)** is clearly dominated by the production, mostly due to energy consumption but significantly reduced through the use of electricity from renewable sources.

**The Depletion Potential of the Stratospheric Ozone layer (ODP)** is mostly influenced by the manufacturing phase (module A1-A3) and significantly influenced using electricity.


**The Acidification Potential (AP)** is also dominated by the production due to the process's emissions and the electricity consumption. Most of the impact is by emissions of sulphur dioxide, ammonia and nitrogen oxides.

**The Eutrophication Potential (all EP indicators in total)** is significantly influenced by production due to emissions from the curing oven, furnace and other unit processes. The glucose for the binder production also has an impact because of crops fertilizers use.

**The Formation Potential of Tropospheric Ozone (POCP)** is dominated by the production due to emissions in the curing oven and in other unit processes but also energy consumption.

**The Abiotic Depletion Potential for Non-Fossil Resources (ADP- minerals & metals)** is dominated by the raw materials production.

**The Abiotic Depletion Potential for Fossil Resources Potential (ADP-fossil)** is dominated by energy consumption for the production. The packaging and the binder have also a non-negligible impact.

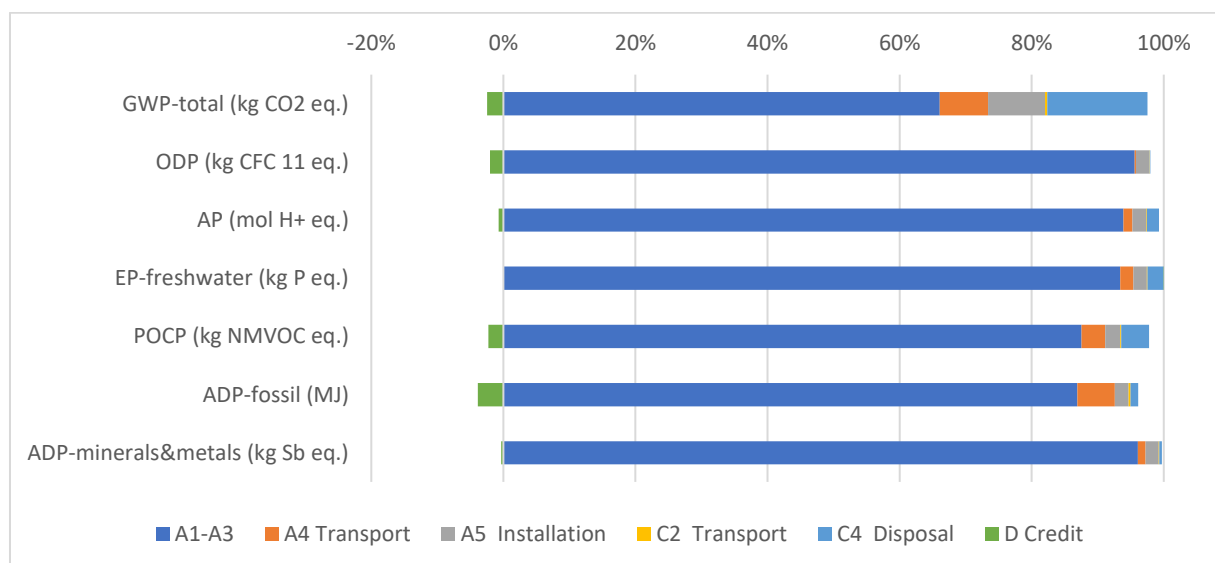

The difference in results for GWP (A1 - A3) between each manufacturing site covered with this EPD and the average results goes from -7.9% in Bernburg, to -2.2% in Krupka and reaching 0.3% in Lannemezan and 9.8% in Visé, which reflects that Visé is the most impactful plant, followed by Lannemezan and Krupka, while the better results are obtained in Bernburg. These deviations come from the differences between production processes and the amount of energy and raw materials consumed, as described below.

In relation with the ratio between the energy consumed registered during 2022 by net output actual, we can point on Visé highest ratio in both, electricity, and natural gas, as the responsible of the highest impact results. Bernburg on its side, has the best ratio for natural gas, that explain the better results of this plant.

## **RESOURCES USE**

Total Use of Non-Renewable Primary Energy Resources (PENRT) is dominated by the production of glass mineral wool products (especially due to the energy consumption) and with little influence of raw materials, binder and packaging.

Total Use of Renewable Primary Energy Resources (PERT) is dominated by the binder (bio-based) and the production.

For the Use of Secondary Material (SM), there is a lot of external cullet used into the batch process (recycled glass from windows, bottles and jars) up to 80% depending on plants.

## References

### **International EPD® System**

General Programme Instructions of the International EPD® System. Version 4.0.

Product category rules (PCR): PCR 2019:14 v1.2.5. Construction products (EN 15804:A2) Version 1.0  
c-PCR-005 Thermal insulation products (EN 16783: 2017) Version: 2019-12-20

### **LCA for Experts 10.7**

LCA for Experts 10.7: Software and database for life cycle engineering. LBP, University of Stuttgart and Sphera, 2023.

### **EN 16783:2017**

Thermal insulation products - Product category rules (PCR) for factory made and in-situ formed products for preparing environmental product declarations

### **DoP G4222LPCPR, G4335LPCPR, G4232LPCPR, G4220LPCPR**

Declaration of Performance

[www.dopki.com](http://www.dopki.com)

### **EN 12086**

EN 12086: 2013 Thermal insulating products for building applications –determination of water vapour transmission properties.

### **EN 15978: 2011**

EN 15978: 2011 Sustainability of construction works - Assessment of environmental performance of buildings - Calculation method.

### **ISO 21930:2017**

Sustainability in buildings and civil engineering works — Core rules for environmental product declarations of construction products and services

### **ISO 14021**

ISO 14021:2016 Environmental labels and declarations — Self-declared environmental claims (Type II environmental labelling)

### **ISO 14025**

DIN EN ISO 14025:2011-10: Environmental labels and declarations — Type III environmental declarations — Principles and procedures

### **EN 15804**

EN 15804:2012-04+A2 2013: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

### **EN 1602:**

EN1602: 2013 Thermal insulation products for building applications – Determination of the apparent density

### **EN 12667**

EN 12667: 2001 Thermal performance of building materials and products - Determination of thermal resistance by means of guarded hot plate and heat flow meter methods - Products of high and medium thermal resistance

**EN 13162**

EN 13162:2012 Thermal insulation products for buildings - Factory made mineral wool (MW) products – Specification

**EN 13501-1**

EN 13501-1: 2009 Fire classification of construction products and building elements - Part 1: Classification using test data from reaction to fire tests.

**DIN 4102-17**

Fire behaviour of building materials and building components - Part 17: Melting point of mineral wool insulating materials - Terms and definitions, requirements and test

**EN 12086**

EN 12086: 2013 Thermal insulating products for building applications –determination of water vapour transmission properties.

**ISO 8301:1991**

Thermal insulation — Determination of steady-state thermal resistance and related properties — Heat flow meter apparatus.

***2023\_07\_30\_KI\_MULTIFIT 035, Naturoil 035, KI FIT 035, EXPERT LRR 035, UNIFIT 035\_BB\_VS\_LZ\_KK (I-report)***

I-report is an interactive report created with GaBi based on the scenario. More details on the product characteristics, plant allocation and scenario can be found in the i-report.

***BR\_GMW\_2023 (Background Report)***

Calculation rules for the Life Cycle Assessment and Requirements and more details about the production on the Background Report.

## Contact information:

|                     |                                                                                                                                                                                                                                                                                                                                                          |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EPD owner:          |  <p>Knauf Insulation<br/>Rue de Maestricht 95<br/>4600 Visé<br/>Belgium<br/><a href="http://www.knaufinsulation.com">www.knaufinsulation.com</a><br/>Contact :</p>                                                                                                      |
| LCA support:        |  <p>CO<sub>2</sub> Logic<br/>Cantersteen 47<br/>1000 Brussels<br/>Belgium</p><br> <p>Sphera Solutions GmbH<br/>Hauptstraße 111-113<br/>70771 Leinfelden-Echterdingen<br/>Germany</p> |
| Programme operator: |  <p>EPD International AB<br/><a href="mailto:info@environdec.com">info@environdec.com</a></p>                                                                                                                                                                         |
| Certification body  |  <p>Fabriksgatan 13,<br/>41250 Göteborg<br/>Sweden</p>                                                                                                                                                                                                                |