




AMF TOPIQ® Efficient Pro Hygena

- AMF TOPIQ® Efficient Pro Hygena is a very light stone wool panel with a modern, smooth surface. The surface is washable and anti-microbial (resistant to the growth of germs, bacteria and fungi)
- Excellent sound absorption (1.00 α_w)
- Excellent light reflectance (88%)
- ISO 4
- Ideal for healthcare facilities in general, kitchens, food industries, laboratories, etc.

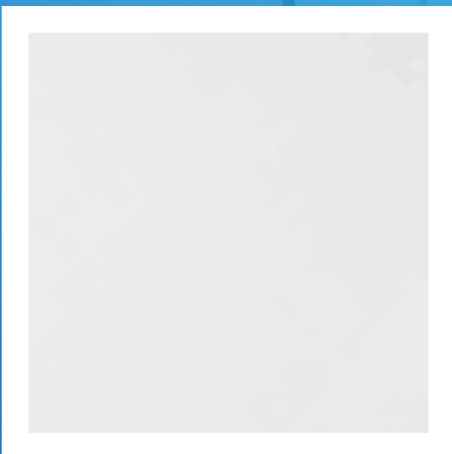

AMF TOPIQ® EFFICIENT PRO HYGENA

| Edge details Additional edge details on request | | Board | Tegular 24/90 | Tegular 15/90 | | | | | | | | | | | | | | |
|---|------|--|---|------------------------|-------------------------|------|-----|-----|------|------|------|------------|------|------|------|------|------|------|
| Thickness (mm) | | 20 | 20 | 20 | | | | | | | | | | | | | | |
| Dimensions (mm) Additional sizes on request | | 600 x 600 1200 x 600 | 600 x 600 625 x 625 | 600 x 600 625 x 625 | | | | | | | | | | | | | | |
| System | | Exposed demountable - System C | | | | | | | | | | | | | | | | |
| Weight | | 2.8 kg / m ² | | | | | | | | | | | | | | | | |
| Colour | | White | | | | | | | | | | | | | | | | |
| Sound absorption | | EN ISO 354 $\alpha_w = 1.00$ as per EN ISO 11654 - Class A <table border="1"> <thead> <tr> <th>Frequency <i>f</i> (Hz)</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>α_p</td> <td>0.45</td> <td>0.90</td> <td>1.00</td> <td>0.95</td> <td>1.00</td> <td>1.00</td> </tr> </tbody> </table> NRC = 0.95 as per ASTM C 423 | | | Frequency <i>f</i> (Hz) | 125 | 250 | 500 | 1000 | 2000 | 4000 | α_p | 0.45 | 0.90 | 1.00 | 0.95 | 1.00 | 1.00 |
| Frequency <i>f</i> (Hz) | 125 | 250 | 500 | 1000 | 2000 | 4000 | | | | | | | | | | | | |
| α_p | 0.45 | 0.90 | 1.00 | 0.95 | 1.00 | 1.00 | | | | | | | | | | | | |
| Sound attenuation | | EN ISO 10848-2 $D_{n,f,w} = 25$ dB as per EN ISO 717-1 CAC = 25 dB as per ASTM E 413-10 | | | | | | | | | | | | | | | | |
| Sound reduction | | EN ISO 10140-2 $R_w = 15$ dB as per EN ISO 717-1 | | | | | | | | | | | | | | | | |
| Fire reaction | | Euroclass A1 as per EN 13501-1 RUS KM2 (G1, V2, D1, T1) as per 123-FZ | | | | | | | | | | | | | | | | |
| Light reflectance | | 88% | | | | | | | | | | | | | | | | |
| Humidity resistance | | 100% RH | | | | | | | | | | | | | | | | |
| Clean room | | ISO 4 as per EN ISO 14644-1 | | | | | | | | | | | | | | | | |
| Indoor air quality | | A | E1 | | | | | | | | | | | | | | | |
| Cleanability | | | | | | | | | | | | | | | | | | |
| Sustainability | | EN ISO 14021 33% | BIOSOLUBLE WOOL EC 1272/2008 Annex G | | | | | | | | | | | | | | | |

Products may vary from country to country.
Please contact your local sales representative.
For further information and legal notice, please visit our website.