


Wall C Stud

Technical Data Sheet 08/2024

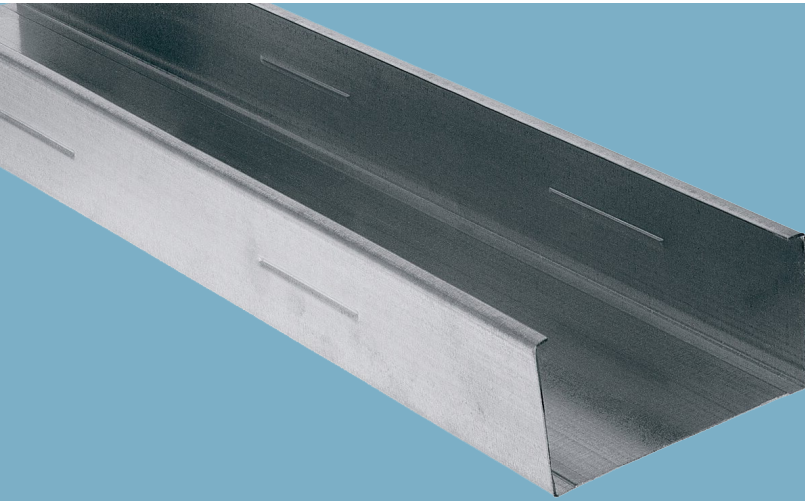

Wall C Stud

Profile

Product Description

Galvanized lightweight steel section is applied vertically for use in gypsum board partition wall and wall cladding systems, and applied horizontally for use in free spanning gypsum board suspended ceiling systems.

Storage

- Profiles are tied and packed on pallets.
- Direct contact with water should be avoided.
- Packages should be stored in flat, dry and clean areas.

Standards referred to

TS EN 14195

Fields of Application

- Partition Wall Systems
- Hanger free suspended ceilings

Technical Data

Description		Thickness (mm)	Weight (kg/m)	Width (mm)	Flange (mm)	Length (mm)	Packaging (pcs.)	Material Number
Knauf Wall C Stud	DC50	0,6	0,73	48,8	49 / 47	3000	12	147080
		0,8	0,980		49			147289
	DC75	0,6	0,847	73,8	49 / 47			147090
		0,8	1,150		49			147266
	DC100	0,6	0,964	98,8	49 / 47			147099
		0,8	1,290		49			201274
	DC125	0,6	1,085	123,8	49 / 47		8	283187
		0,8	1,450		49		551490	
	DC150	0,6	1,200	148,8	49 / 47		4	59364
		0,8	1,600		49			59121

System Performance Values

Performance values as sound insulation, fire resistance etc. may differ acc. to the drywall system to be applied. Please check the performance values of the drywall systems;

[Knauf Technical Website](#)
[Document Center](#)

Application

Application should be done acc. to the applicable standards and acc. to the Knauf Technical Brochures of the respective drywall system.

▶ 444 YAPI - 9274

▶ www.knauf.com.tr / www.teknik.knauf.com.tr

▶ teknik@knauf.com

Center: Knauf Moment Beştepe Office, Beştepe Mah. 32.Cadde No:1/212-218 06560 Beştepe-Yenimahalle
/ ANKARA Tel: 0312 297 0100 Faks: 0312 266 4506