

Knauf – One of worldwide market leaders in providing customers with light-weight material Solution

“Knauf Group, a German-based global company operating across 90 countries worldwide, acquired Sheetrock as part of its acquisition of USG in 2018. The synergies from this acquisition increases Knauf’s capability to provide products and systems for light-weight building material that are environment-friendly, energy-efficient, and fairly-priced to help customers work and build better.”

Knauf – One of leading German brands for builders to Build a Better Living Space.



KNAUF VIETNAM CO., LTD.

HO CHI MINH OFFICE: 7th Floor, Harbour View Tower, 35 Nguyen Hue Street, Ben Nghe Ward, District 1, Ho Chi Minh City, Vietnam	HO CHI MINH Plant: Lot B3a, Hiep Phuoc Industrial Zone, Hiep Phuoc Commune, Nha Be Ward, Ho Chi Minh City, Vietnam	HANOI OFFICE: 8th Floor, Capital Place Building, 29 Lieu Giai Street, Ba Dinh District, Ha Noi, Vietnam	HAI PHONG Plant: Land Plot CN4.4A, Dinh Vu IP, Dinh Vu - Cat Hai Economic Zone, Dong Hai 2 Ward, Hai An District, Hai Phong City, Vietnam
Tel: +84 28 3915 1400 Fax: +84 28 3915 1405	Tel: +84 28 3781 8439 Fax: +84 28 3781 8440	Tel: +84 24 3791 8412 Fax: +84 24 3791 8413	Tel: +84 225 883 0660 Fax: +84 225 883 0686

knauf.com/vi-vn | info-vn@knauf.com | <https://www.facebook.com/knaufvietnam>

Remarks: Information provided is for reference purpose only. Products, specifications and requirements may vary according to geographical locations and applications. As each project is unique, please contact your nearest Knauf representative for further product, solution and technical supports.

This document is owned by Knauf Vietnam Co., Ltd. Last update: 06/2025

KNAUF

SUPRAWALL
Partition Frame

Build on us.

KNAUF

SUPRAWALL

Introduction

Originating from the Knauf group in Germany, SUPRAWALL is a premium product designed and manufactured to meet the ASTM C645 standard, ensuring suitability for a wide range of drywall applications. The SUPRAWALL metal system is widely used in acoustic, fire-resistant, wet area, and various other specialized solutions.

Standard



Advantages

- German Brand
- Durability
- Lightweight structure and fast installation


Quy cách sản phẩm

Sản phẩm	Hình ảnh sản phẩm	Mặt cắt	Tiết diện (rộng x cao) (mm)	Chiều dài (mm)	Độ dày (mm)	Đóng gói
Suprawall Stud 51* (*): 64/ 76/ 92/ 102/150			51 ⁽¹⁾ x 35 x 33	3000	0.5 0.72	10
Suprawall Track 51* (*): 64/ 76/ 92/ 102/150			53 ⁽²⁾ x 30 x 30	3050	0.5 0.72	10
Acoustic 92			92 x 35 x 33	3000	0.5	10
CH Stud 64* (*): 64/ 102			64 ⁽³⁾ x 35 x 38	3000	0.75	6
CH Track 64* (*): 64/ 102			66 ⁽⁴⁾ x 45 x 25	3000	0.75	6


⁽¹⁾51/ 64/ 76/ 92/ 102/150
⁽²⁾53/ 66/ 78/ 94/ 104/152
⁽³⁾64/ 102
⁽⁴⁾66/ 104



High quality gavanized aluminum steel to prevent rusting



The 88-degree internal angle structure of a track supports for quick installation



Engineered profile designs to optimize section strength, rigidity

Full system from Knauf

SUPRAWALL PARTITION should be installed in FULL SYSTEM with Knauf plasterboard or product which is under KNAUF's approval in order to achieve highest performance.

Storage & Installation

Stored and installed in dry, non-wet conditions (not under the impact of rain, seepage and poor ventilation in prolonged high humidity condition).

TRUSTED SOLUTIONS FROM GERMANY

WARRANTY 5 YEARS



German Brand




Superior safety



Fast - Easy installation

Partition details

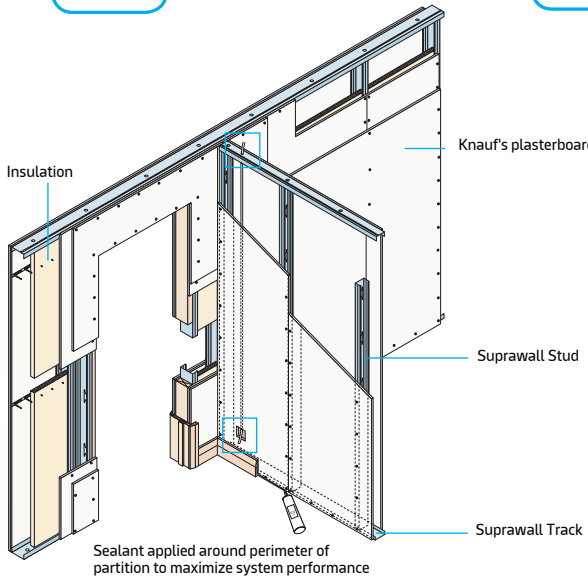

Knauf Drywall system

Drywall solution	Stud size (mm)	Layers x Span of stud (mm)	Layers x Thickness of board (mm)	Wall width (mm)	Max Height (m)	Fire Rating EI (*) (min)	Acoustics, STC/Rw (**) (dB)
SAFEWALL	64	1 X @610	1 X 12.7	92	3.7	—	42
	76	1 X @610	1 X 12.7	104	4.2	—	42
	92	1 X @610	1 X 12.7	120	4.6	—	43
	102	1 X @610	1 X 12.7	130	4.9	—	43
QUIETWALL	51	2 X @610	2 X 12.7	157	4.6	60	55 (TN)
	76	1 X @610	2 X 12.7	127	5.1	60	50
	92A	1 X @610	2 X 12.7	145	5.7	60	55
	64	1 X @610	1 X 12.7	92	3.4	45	42
FIREWALL	76	1 X @610	2 X 12.7	117	4.6	120 (TN)	50
	92	1 X @610	1 X 15.9	126	5.1	60 (TN)	45
	102	1 X @610	2 X 15.9	168	6.0	150 (TN)	52
	150	1 X @610	3 X 15.9	248	7.0	180	58

Values in above tables are nominal and for indicative purposes only
The span should be calculated depending upon actual installed conditions
Internal and non-load-bearing partition

(*) Reference for full system from Knauf
(**) Using Insulation with thickness of 50mm, density of 40kg/m³
(TN) Test results with SupraWall 76 according to QCVN 06:2021/ BXD