

KNAUF

***K Service
Prefabricated
Access Panel***



Build on us.

K Service

General Information

A prefabricated access panel by Knauf. An area around the manhole is blending well with the ceiling, enhancing an aesthetic in the surrounding area. Produced from high quality material, has a high strength.

- Ready to use, save a time.
- Strong and durable, has a same lifetime as a ceiling.
- Neat design, no frame make it blends well with the ceiling.
- Ease to open and close the panel.
- Non hazardous, environment friendly.




▶ Standard

▶ Moisture Resistant



Product Information

Type	Thickness (mm)	Panel Size (mm)	Frame Size (mm)
Standard	9	300 x 300	500 x 500
		450 x 450	650 x 650
		600 x 600	800 x 800
		600 x 1200	800 x 1400
Moisture Resistant	9	300 x 300	500 x 500
		450 x 450	650 x 650
		600 x 600	800 x 800
		600 x 1200	800 x 1400

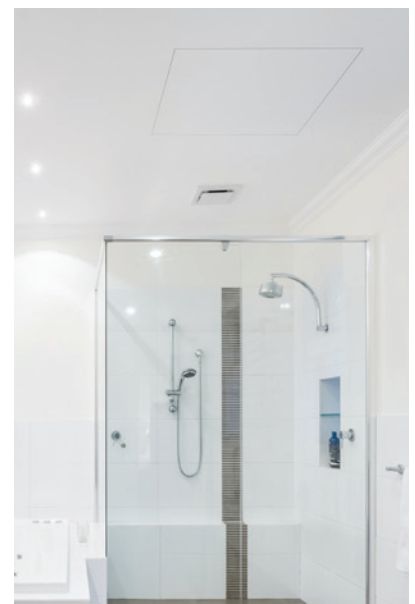

Instruction



1. Make a hole on ceiling with the same size as a K Service frame.



2. Install an additional metal profile around the hole to enhance the strength.



3. Fix the K Service frame to the metal profile, coat the joints with Knauf jointing compound (K Joint) and cotton tape.



4. Insert K Service panel in the hole to close it.

KNAUF

The Siam Gypsum Industry (Saraburi) Co., Ltd.
Pakin Building, 5th floor, 9 Ratchadapisek Road,
Dindang, Bangkok 10400

☎ +66 2 555 0015

✉ marketingknaufgypsumthailand@knauf.com

🌐 www.knauf.com

📍 Knauf Thailand

