

Note on English translation / Hinweise zur englischen Fassung

This is a translation of the technical data sheet valid in Germany.

All stated details and properties are in compliance with the regulations of the German standards and building regulations. They are only applicable for the specified products, system components, application rules, and construction details in connection with the specifications of the respective certificates and approvals.


Knauf Integral KG denies any liability for applications outside of Germany as this requires changes acc. to the respective national standards and building regulations.

GIFAtec

K843a.de

Product Data Sheet

10/2020

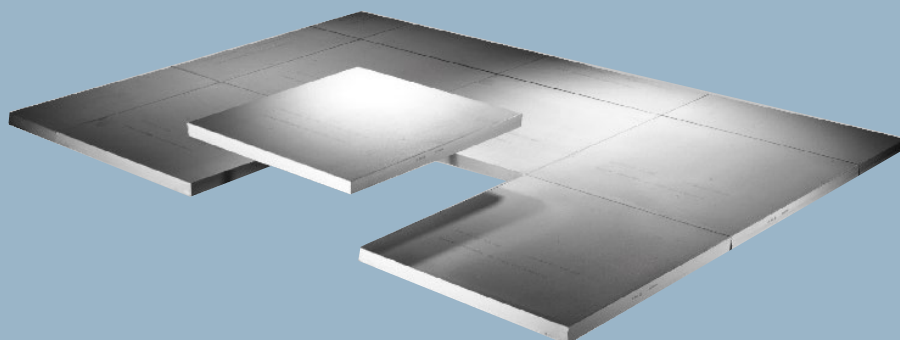

GIFAfloor DB alpha raw panels

Core panel for raised access floor elements

Product description

GIFAfloor DB alpha are gypsum fibre core panels for the industrial production of raised access floor elements. The high strength of the material allows thinner support layers compared to elements made from other materials.

The principles of processing timber based panels can be applied when working with GIFAfloor DB alpha

GIFAfloor DB alpha can carry many different kinds of floor coverings.

Quality

The product underlies constant factory production control.

Storage

GIFAfloor DB alpha should be stored in a dry location and protected against the effects of weather.

Properties and added value

- Non-combustible
- Suitable for indoor use acc. to German AgBB-scheme (Eurofins certified)
- Tested environmental safety (IBR certificate)
- High tensile strength
- High loading capacity
- Tested durability
- High dimensional stability
- Good to process, high quality milling pattern
- Suitable for all types of floor coverings

Core panel for raised access floor elements

Usage instruction

This document contains information exclusively valid for GIFAfloor DB alpha core panels (raised access floor core panels) manufactured in accordance to EN 15283-2. Technical changes will result by processing the GIFAfloor DB alpha core panel. Therefore further tests on the finished product e.g. building material classification may be necessary.

For the processed GIFAfloor DB alpha core panels EN 14190 „processed Gypsum board“ has to be applied. The CE-marking has to be provided by the system supplier or raised access floor manufacturer acc. to EN 14190. System tests have to be carried out by the system provider in accordance to EN 12825.

Product range

Product	Width mm	Length mm	Thickness mm	Ultimate load N	Packaging unit		Product code	EAN
					Pieces/pallet	Weight [kg]/pallet		
GIFAfloor DB 28	604	604	28	≥ 4000	60	1010	634537	4003982461124
GIFAfloor DB 30	604	604	30	≥ 4400	60	1081	634539	4003982461131
GIFAfloor DB 34	604	604	34	≥ 6000	50	1022	634542	4003982461155
GIFAfloor DB 36	604	604	36	≥ 6400	50	1081	634543	4003982461162
GIFAfloor DB 38	604	604	38	≥ 8000	50	1140	634544	4003982461179
GIFAfloor DB 40	604	604	40	≥ 9000	40	962	634545	4003982461186

Ultimate load values were determined on steel cylinders (Ø 90 mm), test grid dimension 600x600 mm, test stamp 25x25 mm, test point on weakest board edge.

Technical data

Description	Value	Unit	Standard
Building material class	A1 (Non-combustible)	Class	EN 13501-1
Edge design	VK	–	DIN 18180
Dimensional tolerance width	+2,0 / -0,5	mm	internal specification
Dimensional tolerance length	+2,0 / -0,5	mm	internal specification
Dimensional tolerance thickness	± 0,2	mm	EN 15283-2
Dimensional tolerance torsion	≤ 1,0	mm	EN 12825
Dimensional tolerance angular accuracy	≤ 1,2	mm	internal specification
Dimensional tolerance straightness of the edges	± 0,6	mm	EN 12825
Dimensional tolerance Diagonal accuracy	± 1,0	mm	EN 12825
Density	approx. 1600 (± 5 %)	kg/m ³	EN 15238-2
Surface hardness (Brinell)	≥ 40	N/mm ²	internal specification
Adhesive pull strength	≥ 1,0	N/mm ²	EN 13892-8
Specific heat capacity c	> 1000	J/(kg·K)	–
Thermal expansion coefficient α	12,9·10 ⁻⁶	1/K	–
Length change at temperature change	≤ 0,02	mm/(m·K)	internal specification
Length change at change of rel. air humidity by 30% at 20°C	≤ 0,6	mm/m	internal specification
Hygrothermal installation conditions (stationary)	+10 °C to +35 °C approx. 45 – 75 % rel. humidity	–	internal specification
Hygrothermal using conditions (stationary)	+10 °C to +35 °C approx. 35 – 75 % rel. humidity	–	internal specification
Surface water absorption capacity	< 300	g/m ²	EN 15283-2
Electrostatic conductivity	≥ 1·10 ⁷	Ω	EN 1081
Durability for vertical dynamic load change with maximum load	≥ 100000	Alternating load	acc. to EN 13964

Sustainability

Description	Value	Unit
Suitable for indoor use acc. to German AgBB-scheme	fulfilled	–
French emission class	A+	–
IBR Certificate	Tested and approved	–
Eurofins Indoor Air Comfort 6.0	fulfilled	–
Recycled content post-Consumer (average)	approx. 11	%
Recyclinganteil pre-Consumer (average)	approx. 41	%
Environmental Product Declaration	EPD-BVG-20140069-IAG1-DE	–

Information on sustainability of Knauf GIFAfloor

Building assessment systems ensure the sustainable quality of buildings and constructional structures by a detailed assessment of ecological, economic, social, functional and technical aspects.

In Germany, the following certification systems are of particular relevance:

■ DGNB System

Deutsches Gütesiegel Nachhaltiges Bauen der DGNB (German association for environmentally sustainable building)

■ BNB

(Bewertungssystem Nachhaltiges Bauen, Quality rating system for environmentally sustainable building)

■ LEED

Leadership in Energy and Environmental Design). Knauf products and Knauf precast tile or slab flooring can positively influence many of these criteria.

DGNB/BNB

Ecological quality

- Criterion: Risks for the local environment The relevant environmental data are contained in the EPD for gypsum products

Economic quality

- Criterion: Building related life-cycle costs, Cost-effective Knauf Drywalling Sociocultural and functional quality
- Criterion: Suitability for conversion, Flexible Knauf Drywalling

Technical quality

- Criterion: Fire protection
Comprehensive fire protection know-how
- Criterion: Sound insulation
Exceeding the demands of the standard with Knauf sound protection
- Criterion: Ease of dismantling and recycling, Knauf Drywalling is fully compliant


LEED

Materials and Resources

- Credit: Recycled Content
Recycled content in Knauf boards, e.g. FGD gypsum
- Credit: Regional Materials
Short transport routes provided by the extensive network of Knauf manufacturing facilities.
Detailed information on request and online at www.knauf-blue.de

Eco-friendliness

Knauf GIFAfloor has an eco-friendly approval since March 2003 after a certificate was awarded by the IBR - Institute for building biology, Rosenheim (D). The eurofins-institute Galten (DK) determined the suitability for indoor use in accordance with the DIBt certification guidelines.

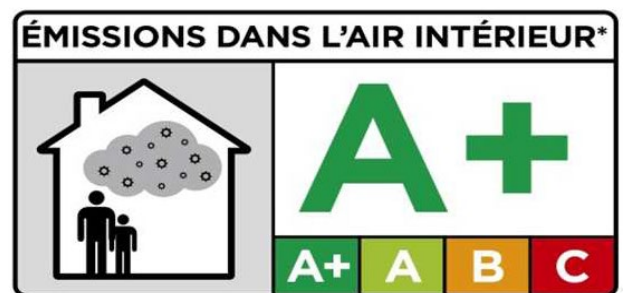



Institut für **Baubiologie** Rosenheim GmbH

Certificate of Award

Based on the excellent test results, the Seal of Approval



is hereby awarded to



Knauf Integral KG
D-74589 Satteldorf

for the tested product

Knauf gypsum fibreboards

(Certification-No. 3019 - 1032)

by the Institut für Baubiologie Rosenheim GmbH.




Reimut Hentschel, Managing Director
Rosenheim, February 2019

The Seal of Approval is awarded for 2 years. In the interest of consumers, follow-up testing of the products must be performed in due time before the Seal of Approval expires. The applicant will have to reapply for these tests.

IBR Institut für Baubiologie GmbH D-83022 Rosenheim Münchener Straße 18
Tel. +49 (0)8031 / 3675-0 Fax +49 (0)8031 / 3675-30 www.baubiologie-ibr.de

Disposal

GIFAfloor waste is classified with the waste code number 17 08 02 gypsum-based construction materials, or 17 09 04 mixed construction and demolition wastes, not contaminated with hazardous substances.



Attestation

European National Regulations on VOC emissions

On 27 February 2018, Eurofins Product Testing A/S received a sample of a ceiling panel with the product name:


GIFAboard and GIFAfloor

supplied by
Knauf Integral KG


The emissions were tested according to the regulations in Germany, France and Belgium. The test is in accordance with German AgBB (2015) and the guidelines of the DIBt (2010), the French legislation of 2011 on emission classes as specified in decree no 2011-321, and the Belgian Royal Decree C-2014/24239. Sampling, testing and evaluation were performed according to EN 16516, ISO 16000-3, ISO 16000-6, ISO 16000-9, ISO 16000-11 in the latest versions, see the test report no. 392-2018-00088701_A_DE.

The formaldehyde test result is similar to a test obtained with EN 717-1.


Evaluation of the emission test result according to Indoor Air Comfort 6.0:

- French VOC class: 
- Carcinogenic substances were not detectable after 3 and after 28 days.
- The total of all VOC ("TVOC") and the sum of all VOC (AgBB) after 3 days both were below the limit of 10 000 µg/m³.
- The total of all VOC ("TVOC") and the sum of all VOC (AgBB) after 28 days both were below the limit of 1000 µg/m³.
- The total of all SVOC ("TSVOC") after 28 days was below the limit of 100 µg/m³.
- After 28 days the values R₀ and R₉₀ were below the limit of 1.
- The sum of VOC without LCl₀ after 28 days was below the limit of 100 µg/m³.
- Formaldehyde after 28 days was below the limit of 60 µg/m³.

The tested product complies with referenced European regulations as of 13 April 2018
13 April 2018



Nanna Boholm
Chemist



Rasmus Stengård Christensen
Analytical Service Manager, MSc in Chemistry

Eurofins Product Testing A/S • Smedeskovvej 38, 8464 Galten, Denmark • Tel. +45 70 22 42 76
www.product-testing.eurofins.com



Observe safety data sheet!

For safety data sheet see
pd.knauf.de



The App Knauf Infothek provides all the current information and documents from Knauf Gips KG at any time and in every location in a clear and comfortable way.

[Knauf Infothek](#)

Knauf Direct
Technical Advisory Service:

▶ knauf-direkt@knauf.de

▶ www.knauf-integral.de

Knauf Integral KG Am Bahnhof 16, 74589 Satteldorf, Germany

All technical changes reserved. Only the current printed instructions are valid. The stated information represents current state-of-the-art Knauf technology. The entire state of approved engineering rules, appropriate standards, guidelines, and rules of craftsmanship are not included herewith. These and all application instructions have to be adhered to separately by the installer. Our warranty is expressly limited to our products in flawless condition. All application quantities and delivery amounts are based on empirical data that are not easily transferable to other deviating areas.

All rights reserved. All amendments, reprints and photocopies, including those of excerpts, require our expressed permission.