

# ***KNAUF***

## ***KNAUF Ceiling Tile***

*Knauf Ceiling Tile*



## ***KNAUF Ceiling Tile***


Lightweight plaster tile for removable ceilings, covered with a white PVC film on the front side and an aluminum sheet on the back side.

## ***Advantages***

- Lightweight and easy to install
- Mold-resistant
- Reduced installation time
- Washable and easy to clean

## ***Build on us.***

KNAUF Ceiling Tile  
KNAUF Ceiling Tile

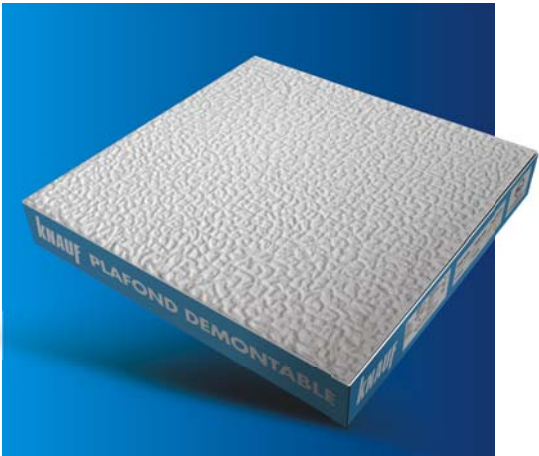

FIELDS OF APPLICATION

- **New construction and renovation:** for removable suspended ceilings
- **Suitable for:** Education facilities, Offices, Retail spaces, Healthcare, Industrial premises, Hospitality


STANDARDS AND CERTIFICATIONS

- Manufactured in compliance with: EN 14190 standard

INSTALLATION GUIDE


For best results, it is recommended to install KNAUF Removable Ceiling using the Knauf profile system.

- 1 Main Runner
- 2 Long Cross Tee
- 3 Short Cross Tee
- 4 Perimeter Angle
- 5 Hanger

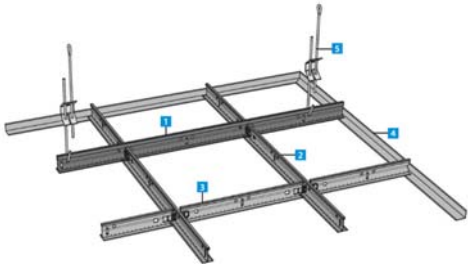

PRODUCT FEATURES

| Description                         | Technical Specification                              |
|-------------------------------------|------------------------------------------------------|
| Appearance                          | PVC on the front side,<br>Aluminium on the back side |
| Thickness (mm)                      | 9,5                                                  |
| Width (mm)                          | 595                                                  |
| Length (mm)                         | 595                                                  |
| Nominal weight (kg/m²)              | 6,65 (± 0,15)                                        |
| Water vapor diffusion factor        | (μ) : 10                                             |
| Thermal conductivity (λ)            | 0,25                                                 |
| Flexural strength (N)               | ≥ 400                                                |
| Breaking load under flexibility (N) | ≥ 160                                                |
| Edge type                           | Straight edges (SE)                                  |

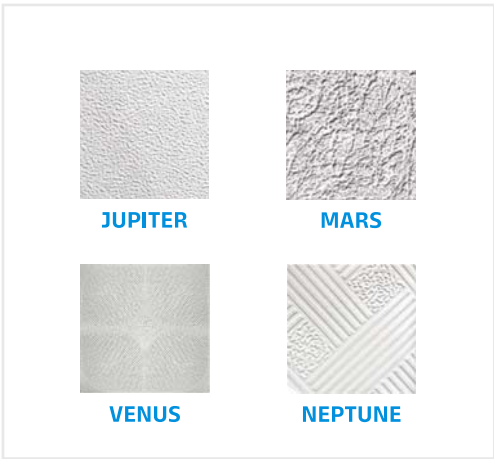

Important Information

The information provided in this document is intended to guide users in the selection and use of Knauf products. However, Knauf Plâtres SARL cannot be held responsible for any installation or construction defects resulting from the use of this guide.

It is recommended to seek independent advice to ensure compliance with current regulations, particularly regarding hygiene and safety.

This sheet cancels all previous versions. The data provided is based on the current state of our knowledge, but Knauf cannot be held responsible for any misuse. For further information, please contact our technical service.

Precautions for Use

- Plaster dust may irritate the respiratory tract and cause coughing or other issues.
- **In case of contact with eyes :** rinse immediately with clean water, remove contact lenses if possible, and continue rinsing. Consult a doctor if symptoms persist.
- **Disposal :** dispose of in accordance with applicable local, regional, national, and international regulations.



Head Office Oran

Knauf Plâtres SARL: Chemin de Wilaya No. 64,  
31063 Benfréha, Gdyl, Oran, Algeria.  
P.O. Box No. 2 - 31024 Boufatis, Oran, Algeria.

Sales Department Algiers

OBP - Oriental Business Park 2,  
3rd Floor, Algiers Business District,  
Bab Ezzouar 16042, Algiers, Algeria.

Sétif Office

Business Center, Park Mall,  
No. 1104, 11th Floor 19000,  
Sétif, Algeria.

www.knauf.com

Tel.: +213 [0] 41 76 34 70 to 83  
Fax: +213 [0] 41 76 34 75

