






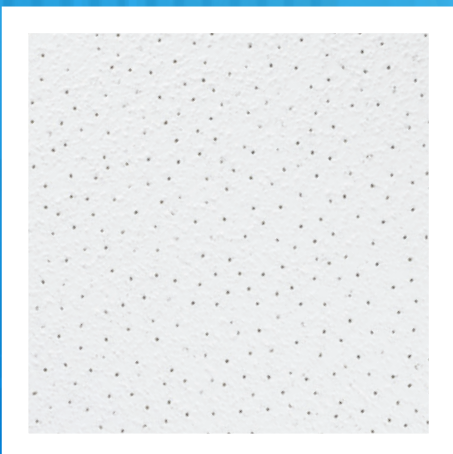






ARMSTRONG FERIA

- Armstrong FERIA ima mikroperforiranu, blago granuliranu površinu koja nudi dobru kombinaciju apsorpcije zvuka i uzdužne zvučne izolacije
- Dobra refleksija svjetlosti (85%)



Detalji rubova Ostali detalji rubova na upit	Board 	Tegular 24 														
Debljina (mm)	14	14														
Dimenzije (mm) Ostali formati na upit	600 x 600 1200 x 600	600 x 600														
Sustav	Vidljiva konstrukcija, demontažni - sustav C															
Težina	3.3 kg / m ²															
Boja	Bijela															
Aposrpcija zvuka	EN ISO 354 $\alpha_w = 0.50$ prema EN ISO 11654 - Class D <table border="1" data-bbox="464 857 1453 931"> <thead> <tr> <th>Frekvencija f (Hz)</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>α_p</td> <td>0.35</td> <td>0.40</td> <td>0.50</td> <td>0.60</td> <td>0.55</td> <td>0.50</td> </tr> </tbody> </table> NRC = 0.50 prema ASTM C 423		Frekvencija f (Hz)	125	250	500	1000	2000	4000	α_p	0.35	0.40	0.50	0.60	0.55	0.50
Frekvencija f (Hz)	125	250	500	1000	2000	4000										
α_p	0.35	0.40	0.50	0.60	0.55	0.50										
Uzdužna zvučna izolacija	EN ISO 10848-2 $D_{n,f,w} = 32$ dB prema EN ISO 717-1															
Reakcija na požar	Euroclass A2-s1, d0 prema EN 13501-1	RUS KM1 (G1, V1, D1, T1) prema 123-FZ														
Refleksija svjetlosti	85%															
Toplinska provodljivost	$\lambda = 0.060$ W/mk prema EN 12667															
Otpornost na vlagu	90% RH															
Kvaliteta zraka	 A+	 E1														
Čišćenje	 															
Održavanje	 EN ISO 14021 33%	 EN ISO 14025														
	 IC 5272:2008 Annex Q															

Proizvodi se mogu razlikovati između prodajnih područja. Molimo kontaktirajte svog lokalnog prodajnog predstavnika. Za dodatne i pravne informacije posjetite našu web stranicu.