


Knauf Acoustical Sealant for Direct Hanger

Technical Data Sheet 12/2023

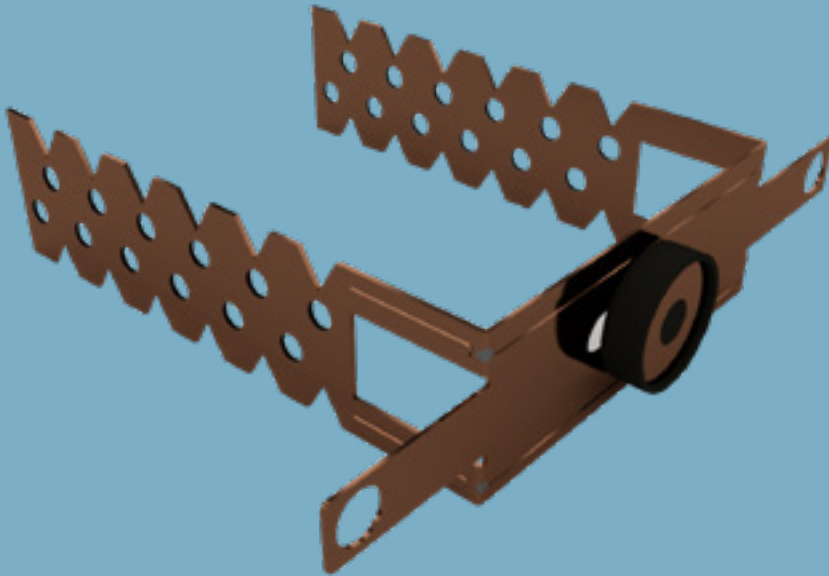

Knauf Acoustical Sealant for Direct Hanger

Hanger element

Product Description

Rubber component fixed on the back side of the direct hangers for improving sound insulation

Storage

- Direct contact with water should be avoided.
- Packages should be stored in flat, dry and clean areas.

Standards referred to

-

Fields of Application

- Suspended Ceiling Systems
- Wall Cladding Systems

Properties

- Clean and easy installation

Knauf Acoustical Sealant for Direct Hanger

Hanger element



Technical Data

Description	Weight (kg/pc.)	Packaging Unit (pcs./pallet)	Standard	Material Number
Knauf Acoustical Sealant for Direct Hanger	0,013	0,8	-	147764

System Performance Values

Performance values as sound insulation, fire resistance etc. may differ acc. to the drywall system to be applied. Please check the performance values of the drywall systems;

[Knauf Technical Website](#)

[Document Center](#)

Application

Application should be done acc. to the applicable standards (TS 1475) and acc. to the Knauf Technical Brochures of the respective drywall system.

▶ 444 YAPI - 9274

▶ www.knauf.com.tr / www.teknik.knauf.com.tr

▶ teknik@knauf.com

Center: Knauf Moment Beştepe Office, Beştepe Mah. 32.Cadde No:1/212-218 06560 Beştepe-Yenimahalle / ANKARA Tel: 0312 297 0100 Faks: 0312 266 4506