

KNAUF

HERADESIGN® Macro Plus

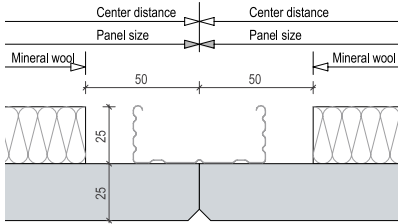
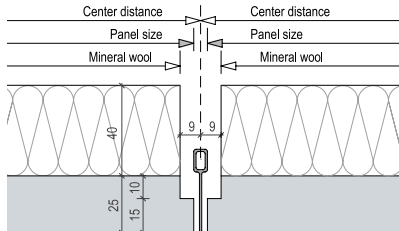



© Sergiy Kadulin

HERADESIGN® Macro Plus is a two layer, magnesite bonded, wood wool acoustic ceiling and wall panel.

- Two-layer acoustic panel as a composite product with mineral wool absorber
- Excellent sound absorption values
- Provides trickle protection

Build on us.

Characteristics		Detailed information													
System		B2.1, B2.2						C2.1							
Edge details		AK-01 Plus						SK-04 Plus							
															
Dimensions (mm)		1200 x 600													
Thickness (mm)		50						65							
		25/25						25/40							
Weight (kg/m²)		14.7						16.0							
Sound absorption		Thickness (mm)	TCH (mm)	HERADESIGN® Acoustic lining (mm)	HERADESIGN® Acoustic lining (kg/m³)	Frequencies (Hz), α _p					Entire range		Class		
*Other acoustic performances can be achieved.		25	50	25	90	125	250	500	1000	2000	4000	NRC	α _w		
						0.20	0.80	0.95	0.60	0.75	0.75	0.75	0.70 (LM)	C	
Reaction to fire		Euroclass B-s1,d0													
Thermal resistance		25/25 0.90 m²K/W						25/40 1.30 m²K/W							
Humidity resistance		Suitable for rooms with a constant humidity of up to 90%.													
Application areas		A decorative and acoustically effective suspended ceiling and wall panel for use in interior spaces as well as roofed outdoor areas that are not directly exposed to environmental influences such as rain or pollutants.													
Installation		The installation of HERADESIGN® acoustic panels should take place during the last phase of the job, and in temperature and humidity controlled conditions. All building activities which create dust must be completed before the start of installation. Store the panels flat and protect against moisture and dirt. The packaging does not protect the products against rain. HERADESIGN® products should be installed in strict accordance with Knauf Ceiling Solutions installation and storage guidelines.													
Designation code		WW-EN 13168-L4W2-T2-S2-P2,TR5-CL3													
Special information		• Manufacturing tolerances in nominal dimensions: L4, W2, T2: ± 1mm, for lengths > 1250mm L4: ± 2mm • Maximum changes in dimension in standard climate 23° C/50 % relative humidity: ± 1 %													
Cleanability	 														
Colours		Standard colours  Vario Design Colours  *similar to RAL 9010 **similar to RAL 1015 ***similar to RAL 9005 • Other colours from popular RAL and NCS colour systems are available. • Deviations in colour and visual appearance may occur due to the rough fibre and panel surface.													
Sustainability		        													