

Heraklith® Edelstahlanker

April 2023



APPLICATIONS



DESCRIPTION

Heraklith® Edelstahlanker stainless steel anchors are specifically intended to be installed as an additional fixing element for Tektalan and Heraklith, in cases where the boards are placed onto temporary formwork, before pouring the concrete.

TECHNICAL CHARACTERISTICS



| | |
|----------------------------|-----------------|
| Slit strip stainless steel | 0.6 x 24 mm |
| Surface Finish | IIIC |
| Head edging | 90°, hook point |

PROCESSING INSTRUCTIONS

- Drive the anchors into Tektalan and Heraklith boards
- Pilot drilling if necessary
- Anchoring depth in the concrete: At least 40 mm
- Requirement: 6 - 8 pieces/m²
- If necessary, mark the insertion openings with an awl

PRODUCT DATA

| Anchor length (mm) | Panel thickness to (mm) | Units / pack |
|--------------------|-------------------------|--------------|
| 95 | 50 | 250 |
| 115 | 75 | 200 |
| 150 | 100 | 150 |
| 165 | 125 | 100 |
| 215 | 150 | 75 |
| 240 | 175/200 | 75 |

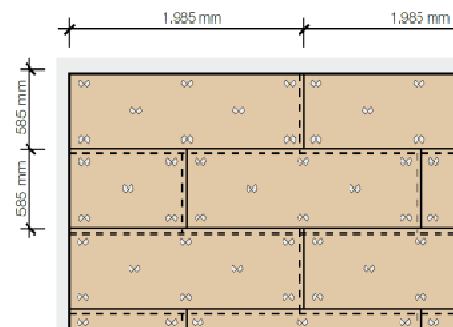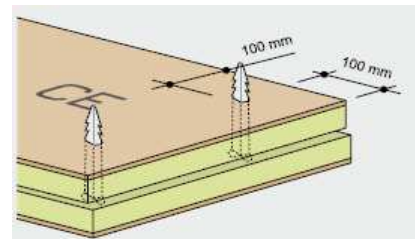

Knauf Insulation SA

10 Evripidou str.
176 74 Kallithea
Greece

sales.gr@knaufinsulation.com Tel.: +30 211 710 7007

Fax.: +30 211 740 9480

Heraklith® is a registered
trademark of

