


Wall U Channel

Technical Data Sheet 08/2024

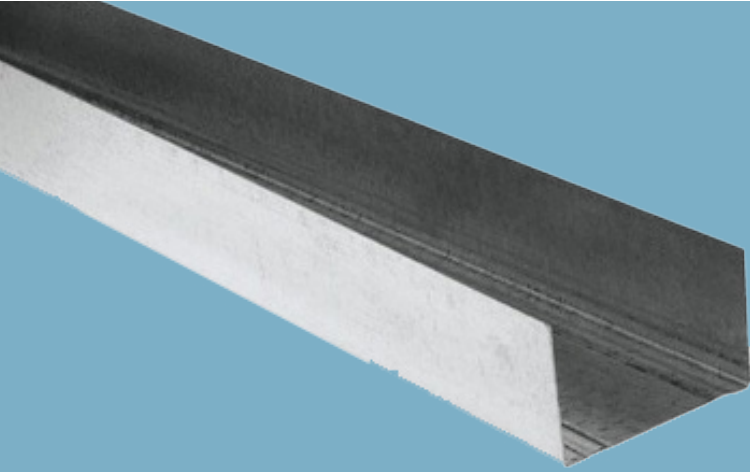

Wall U Channel

Profile

Product Description

Galvanised lightweight steel section for use as the head and floor track in wall systems. (Horizontal installation only)

Storage

- Profiles are tied and packed on pallets.
- Direct contact with water should be avoided.
- Packages should be stored in flat, dry and clean areas.

Standards referred to

TS EN 14195

Fields of Application

- Partition Wall Systems
- Wall Cladding Systems
- Hanger Free Gypsum Board Suspended Ceiling Systems

Technical Data

Description		Thickness (mm)	Weight (kg/m)	Width (mm)	Flange (mm)	Length (mm)	Packaging (pcs.)	Material Number		
Knauf Wall U Channel	DU50	0,6	0,495	50	32/32	3000	12	133395		
			0,594		40/40			176306		
	DU75		0,597	75	32/32			8	133397	
			0,716		40/40				147104	
	DU100		0,772	100	32/32				4	133401
			0,828		40/40					612031
	DU125		0,890	125	32/32		3000			283186
			0,940		40/40					156165
	DU150		1,000	150	32/32			8		220746
			1,060		40/40					405259

System Performance Values

Performance values as sound insulation, fire resistance etc. may differ acc. to the drywall system to be applied. Please check the performance values of the drywall systems;

[Knauf Technical Website](#)

[Document Center](#)

Application

Application should be done acc. to the applicable standards and acc. to the Knauf Technical Brochures of the respective drywall system.

▶ 444 YAPI - 9274

▶ www.knauf.com.tr / www.teknik.knauf.com.tr

▶ teknik@knauf.com

Center: Knauf Moment Beştepe Office, Beştepe Mah. 32.Cadde No:1/212-218 06560 Beştepe-Yenimahalle / ANKARA Tel: 0312 297 0100 Faks: 0312 266 4506