




## AMF ECOMIN Filigran

- AMF ECOMIN Filigran is a cost-effective ceiling solution with a perforated surface, and is suitable for areas requiring good sound absorption.
- High light reflectance (86%)
- Ideal for retail environments

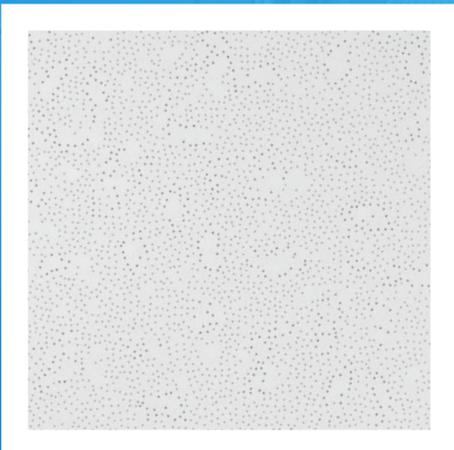

<b>Detalhes das bordas</b> Additional edge details on request		Board 														
<b>Espessura (mm)</b>		13														
<b>Dimensões (mm)</b> Additional sizes on request		600 x 600 1200 x 600														
<b>Sistema</b>		Aparente, removível - Sistema C														
<b>Peso</b>		2.9 - 3.1 kg / m <sup>2</sup>														
<b>Cor</b>		Branco														
<b>Absorção sonora</b>		EN ISO 354 $\alpha_w = 0.55$ conforme EN ISO 11654 - <b>Classe D</b> <table border="1"> <thead> <tr> <th>Frequência f (Hz)</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td><math>\alpha_p</math></td> <td>0.45</td> <td>0.45</td> <td>0.45</td> <td>0.60</td> <td>0.60</td> <td>0.50</td> </tr> </tbody> </table> NRC = <b>0.50</b> conforme ASTM C 423	Frequência f (Hz)	125	250	500	1000	2000	4000	$\alpha_p$	0.45	0.45	0.45	0.60	0.60	0.50
Frequência f (Hz)	125	250	500	1000	2000	4000										
$\alpha_p$	0.45	0.45	0.45	0.60	0.60	0.50										
<b>Reação ao fogo</b>		Euroclass <b>A2-s1, d0</b> conforme EN 13501-1 RUS <b>KM1 (G1, V1, D1, T1)</b> conforme 123-FZ														
<b>Reflexão da luz</b>		<b>86%</b>														
<b>Condutividade térmica</b>		$\lambda = 0.060$ W/mk conforme EN 12667														
<b>Resistência à humidade</b>		<b>70% RH</b>														
<b>Qualidade do ar interior</b>																
<b>Limpeza</b>																
<b>Sustentabilidade</b>																

Os produtos podem variar de país para país. Contacte o seu representante de vendas local. Para mais informações e aviso legal, visite o nosso site.