



Knauf Movement PVC Bead

Designed to provide for movement to accommodate expansion and contraction caused by initial stucco shrinkage and minor thermal movement.

Knauf Movement PVC Bead

Products Description

Rigid PVC movement joint applied onto installed gypsum wallboards to provide stress relief and avoidance of cracks in large areas of wallboard. The two wings have perforations to provide the necessary 'keying' for the thin-coat plasters and/or joint fillers.
(size : 57mm wide and 8mm deep).

Fields of Application

Used internally on gypsum board, fixed between wallboards to allow the necessary movement and avoid cracking in large areas of wallboard. Thin-coat plasters and/or joint fillers can be applied to provide clean and tidy finishes. A protective polythene film or tape is provided, which can be removed after plastering or jointing to enable the control joint to be kept clean and free from plastering materials.

The control joint is mechanically fixed onto the gypsum board using non-corrosive fixings. The control joint can be fixed either vertically or horizontally.

Technical Data

Fire

- The rigid PVC material will not support combustion and is self-extinguishing.
- PVC softening point.....80°C
- Charpy Impact Strength.....12 KJ/m²
- Co-efficient of Thermal Expansion....
6x10⁻⁵/°C

Dimensions

- Standard Length of 3000 mm


Packaging

- Cartons with 25 pieces of 3000 mm

Material

The rigid PVC, in white colour, is 100% recycled PVC. The PVC material is durable, made of PVC (external grade) and high impact, and obviously corrosion resistant. The PVC material provides excellent keying for paints. If necessary, the control joint can be used externally.

Section Details

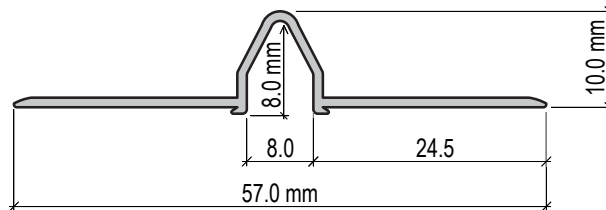

Note:

Please contact our sales department for inquiries about storage and packing.

Knauf Head Office

- ▶ Phone: +971 4 337 7170
- ▶ Fax: +971 4 334 9659
- ▶ P.O. Box: 112871, Dubai
- ▶ info@knauf.ae

Knauf Qatar Branch

P.O.Box 27111
Doha, State of Qatar
Tel: +974 44528191
Fax: +974 44528181

Knauf Manufacturing Plant

P.O.Box 50006
Ras Al Khaimah, U.A.E.
Tel: +971 7 221 5300
Fax: +971 7 221 5301

Made in UAE

The information provided in this leaflet is only intended to give guidance in selecting and using Knauf products. While we make every effort to ensure its accuracy, neither Knauf LLC and its branches nor any of this employees or affiliates warrant or assume any legal liability or responsibility for the completeness or usefulness of any failure in installation or constructing structure installation or building or caused by using this leaflet. Readers are advised to independently verify this information prior to reply on it. In particular, readers must obtain appropriate independent advice on the use of products in specific structures, installations or buildings to ensure compliance with all regulations, including health and safety regulations. Knauf reserves the right to amend technical specification without notice.