

Contur (D)

DEMOUNTABLE ACOUSTICAL CEILING

- Uniform, demountable surface
- Space-saving installation
- Ideal for renovation projects and open spaces

Product Datasheet

1/2026



Product description

Demountable acoustic gypsum ceiling in a concealed T-grid system with an edge D design. Installation is from below the T-grid, and installation depth is down to 63 mm.

Recyclable product

Contur (D) is made of gypsum, and gypsum as material is recyclable. This means that Contur (D) acoustic tiles are recyclable and can be re-used in the production of new gypsum boards and acoustic gypsum tiles.

Product performance

Fire rating

A2-s1, d0

Air quality

Indoor value: 10 days

Particle emission: LOW

Load-bearing capacity

Up to 1 kg pr. tile (at max. 2 mm deflection)

Longevity

Contur (D) is a longlasting acoustic ceiling with the possibility for reuse within the same long service life. The tiles are repaintable without the loss of acoustics, and can therefore be updated to different styles depending on the trend.


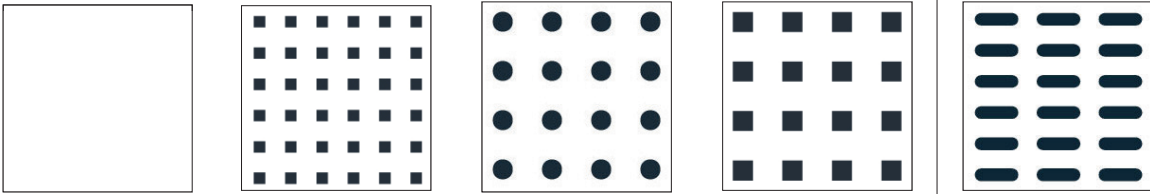
Ambient conditions

Can withstand:

- Constant RH 70% and 25°C

- Ambient temperatures of up to 50°C.

Product variants

Edge design	 <p>Edge D Concealed grid</p>				
Perforation design					
Perforation measures	Regula Without perforations	Micro Square 3x3 mm c/c 8.33 mm	Globe Circles Ø 6 mm c/c 15 mm	Quadril Square 12x12 mm c/c 30 mm	Tangent Obround 4x14 mm c/c 10/20 mm
Perforation %	0 %	10.2 %	10.2 %	13 %	21.3%
NRC, @ 200mm, no mineral wool	0.10	0.60	0.65	0.65	0.75
NRC, @ 200mm, 50mm mineral wool	0.10	0.70	0.70	0.75	0.90
ALPHA-W @ 200mm, no mineral wool	0.10	0.65	0.60	0.60	0.80
APLHA-W @ 200mm, 50mm mineral wool	0.10	0.70	0.65	0.70	0.90
Light reflection	82.6 %	72.1 %	72.8 %	75.1%	70.9%
Sizes, mm	Standard	600x600x12.5			-
	Other options	300-450 x 600-2400 x 12.5 450-625 x 600-1250 x 12.5			
Tile weight, kg/m²	9.45 - 10.20				
Surface treatment	Front: White acrylic paint, RAL 9003, gloss 5. Back: Acoustic felt backing. Galvanised metal clips. Available in other colours on request.				
System components	1) Gypsum ceiling tile, 2) T24/38 main runner, 3) Spacer bar, 4) Hangers				
Certificates	1) Environmental product declaration (EPD), 2) FDES - Life Cycle Analysis, 3) Danish Indoor Climate Labelling, 4) ISO 16000-9 Emission of VOCs, 5) UL-listed in accordance to R26164				