












Zidni sistemi  
**FABRIC Wallcoustic Line**  
(LINE Style)  
Individualni




- FABRIC Wallcoustic Line je zidni apsorber presvučen tkaninom s elegantnim aluminijskim okvirom. Prilagodljiv je kao pojedinačni element ili kao slika. Aluminijski okvir isporučuje se s izrađenim žljebom u koji se ubacuje već odštampana tkanina. Tkanina se može lako ukloniti i zameniti novim dizajnom tkanine, bez upotrebe posebnih alata
- FABRIC Wallcoustic Line 20: uzak profil za jednostrane obloge malih dimenzija, d=20 mm.
- FABRIC Wallcoustic Line 27: profil za jednostrane obloge, za sve dimenzije d= 27 mm.
- FABRIC Wallcoustic Line 50: lagan profil debljine 49 mm s mogućnošću dvostrane obloge.




Zidni sistemi  
**FABRIC Wallcoustic Line**  
 Individualni

<b>Debljina (mm)</b> 	20	27	50																					
<b>Dimenzije (mm)</b> 	600 x 600 1200 x 600	1200 x 1200 1800 x 1200 2400 x 1200 2400 x 2400	600 x 600 1200 x 600 1200 x 1200 1800 x 1200 2400 x 1200 2400 x 2400																					
<b>Sistem</b> 	Zidni nosač																							
<b>Težina</b> 	3.0 - 6.0 kg/m <sup>2</sup>																							
<b>Boja &amp; dizajn</b> 	<b>Ram:</b> Elosirani aluminijum, Beli, RAL Boje <b>FABRIC Wallcoustic Line 20:</b> Tkanina, Bela, Štampa po izboru <b>FABRIC Wallcoustic Line 27:</b> Tkanina, Bela, Štampa po izboru <b>FABRIC Wallcoustic Line 50:</b> Tkanina, Bela, Štampa po izboru																							
<b>Apsorpcija zvuka</b> 	EN ISO 354 <table border="1"> <thead> <tr> <th>Frekvencija <i>f</i> (Hz)</th> <th>125</th> <th>250</th> <th>500</th> <th>1000</th> <th>2000</th> <th>4000</th> </tr> </thead> <tbody> <tr> <td>Ekvivalentna apsorpciona površina *</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1200 x 1200mm (50mm thickness)</td> <td>0.30</td> <td>0.90</td> <td>1.90</td> <td>1.90</td> <td>1.80</td> <td>1.60</td> </tr> </tbody> </table> <p style="text-align: right; font-size: small;">*Iskazana veličina predstavlja srednju vrednost od merenja na tri različite frekvencije u okviru oktave</p>			Frekvencija <i>f</i> (Hz)	125	250	500	1000	2000	4000	Ekvivalentna apsorpciona površina *							1200 x 1200mm (50mm thickness)	0.30	0.90	1.90	1.90	1.80	1.60
Frekvencija <i>f</i> (Hz)	125	250	500	1000	2000	4000																		
Ekvivalentna apsorpciona površina *																								
1200 x 1200mm (50mm thickness)	0.30	0.90	1.90	1.90	1.80	1.60																		
<b>Otpornost na vlagu</b> 	<b>90%</b>																							
<b>Čišćenje</b>	 																							


FABRIC Wallcoustic Line

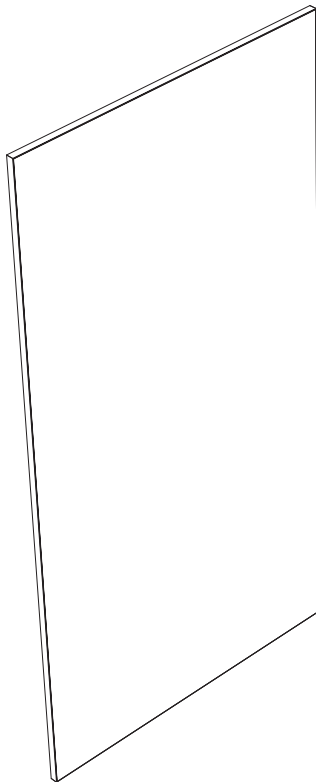

BAN - Poprečni presek profila

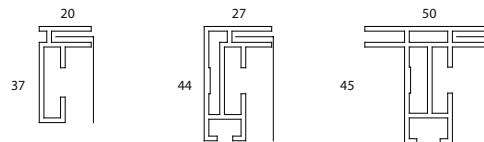

BAL- Ugaoni spojevi



Izgled rama

